









#### VIDEO TUTORIAL

## (i) Important!

This replacement procedure can be used for: AUDI A3 (8L1) 1.8

The steps may slightly vary depending on the car design.

WWW.AUTODOC.CO.UK



## AUTODOC recommends:

• All work should be done with the engine stopped.

#### CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:






Prepare the new windscreen wipers.

WWW.AUTODOC.CO.UK 2–10



2

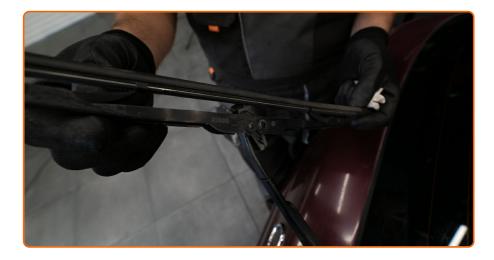

Pull the wiper arm away from the glass surface until it stops.

3



Press the clip. Remove the blade from the wiper arm.

## AUTODOC recommends:

• When replacing the wiper blade, take caution to prevent the springloaded wiper arm from hitting the glass.

WWW.AUTODOC.CO.UK 3–10

4



Install the new wiper blade and carefully press the wiper arm down to the glass.

#### **AUTODOC** recommends:

- Don't touch the wiper blade at the working rubber edge to prevent damage to the graphite coating.
- Ensure that the blade rubber strip fits tightly to the glass along the entire length.

5

Switch on the ignition.

WWW.AUTODOC.CO.UK 4–10



6



Pull the windscreen wiper stalk to the downward position.

7

After installation check the wipers performance. The blades shouldn't intersect or bump against the windshield seal.

WWW.AUTODOC.CO.UK 5–10



# DID YOU FIND THESE INSTRUCTIONS HELPFUL?

YES

NO





**BECOME A MEMBER OF AUTODOC CLUB!** 

WWW.AUTODOC.CO.UK 6–10



## AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

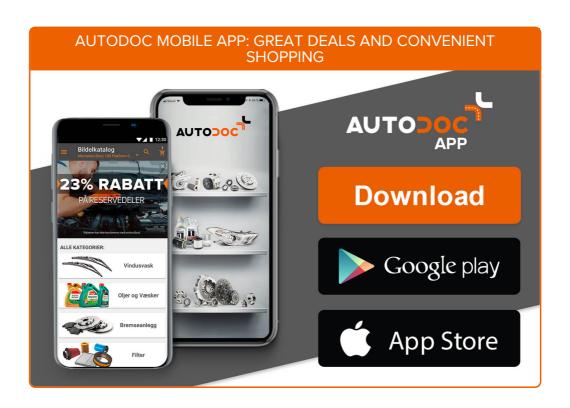

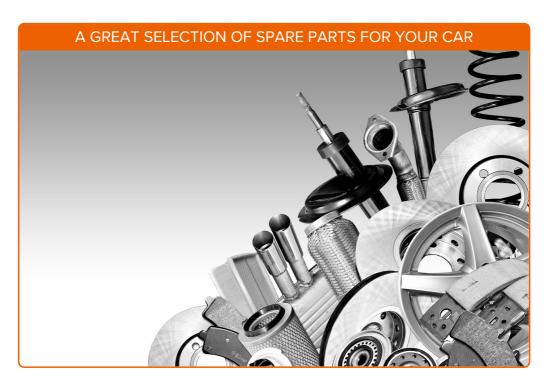

WWW.AUTODOC.CO.UK 7–10







WWW.AUTODOC.CO.UK 8–10







WWW.AUTODOC.CO.UK 9–10





### i Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2018 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by Autodoc GmbH.

WWW.AUTODOC.CO.UK 10–10