VIDEO TUTORIAL

Important!

This replacement procedure can be used for:
AUDI A4 (8EC, B7) 2.0 TDI 16V, AUDI A4 Avant (8ED, B7) 2.0 TDI 16V, AUDI A6 (4F2, C6) 2.0 TDI, AUDI A6 Avant (4F5, C6) 2.0 TDI

The steps may slightly vary depending on the car design.

REQUIRED TOOLS:

- All-purpose cleaning spray
- Torx bit T25
- Drive socket # 10
- Flat Screwdriver
- Clic-R collar pliers
- Fender cover

AUTODOC recommends:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the bonnet.

2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3

Remove the engine cover.

AUTODOC recommends:

- Raise the engine cover, holding it on two sides simultaneously.

4

Unscrew the fasteners of the coolant reservoir. Use Torx T25.

5

Remove the coolant reservoir.

6

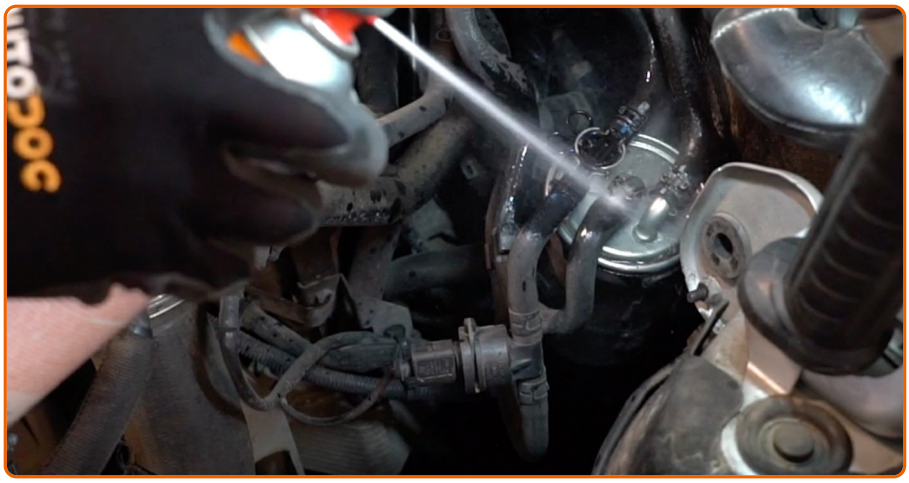

Clean the fuel filter. Use all-purpose cleaning spray.

7

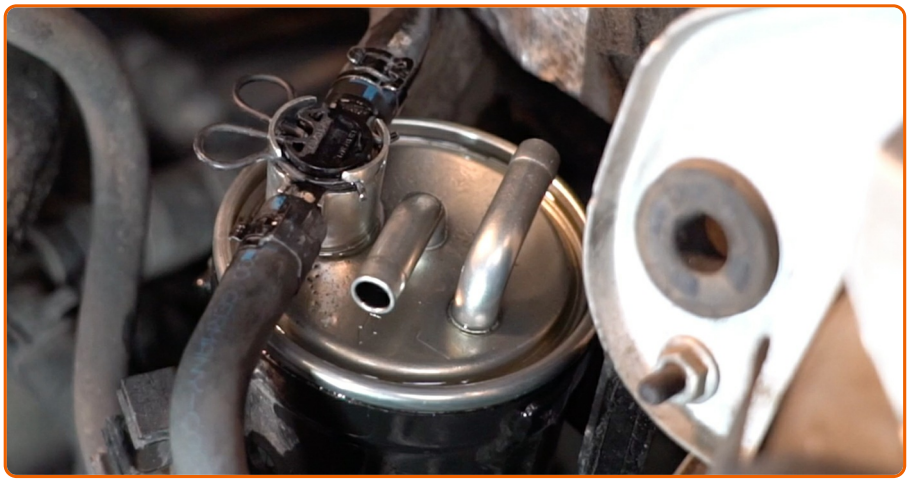

Loosen the fastening clamp of the fuel filter pipe. Use clic-R collar pliers

8

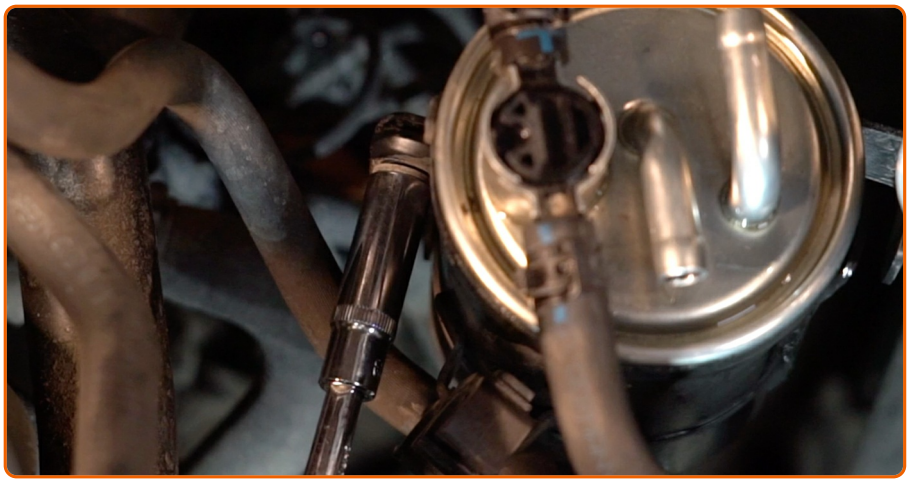

Disconnect the pipe from the fuel filter.

AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

9

Loosen the fuel filter mounting. Use a drive socket #10.

10

Disconnect the pipe from the fuel filter.

11

Remove the fuel filter. Put the old filter cartridge in the container.

12

Remove the o-rings. Use a flat screwdriver.

13

Install new o-rings. Use a flat screwdriver.

14

Install a new fuel filter.

AUTODOC recommends:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.

15

Attach the pipe to the fuel filter.

16

Attach the pipe to the fuel filter.

17

Tighten the fuel filter fasteners. Use a drive socket #10.

18

Tighten the fastening clamp of the fuel filter pipe. Use clic-R collar pliers

19

Install the coolant reservoir.

20

Screw in the coolant reservoir fasteners. Use Torx T25.

21

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

22

Shut off the engine.

23

Install the engine cover and secure it.

AUTODOC recommends:

- Make sure the engine cover is properly seated. It should not be displaced with respect to the guiding fasteners.
- Do not apply excessive force when installing the part. Otherwise you may damage the fasteners.

24

Remove the fender protection cover.

25

Close the hood.

AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

DID YOU FIND THESE INSTRUCTIONS HELPFUL?

YES NO

BECOME A MEMBER OF AUTODOC CLUB!

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

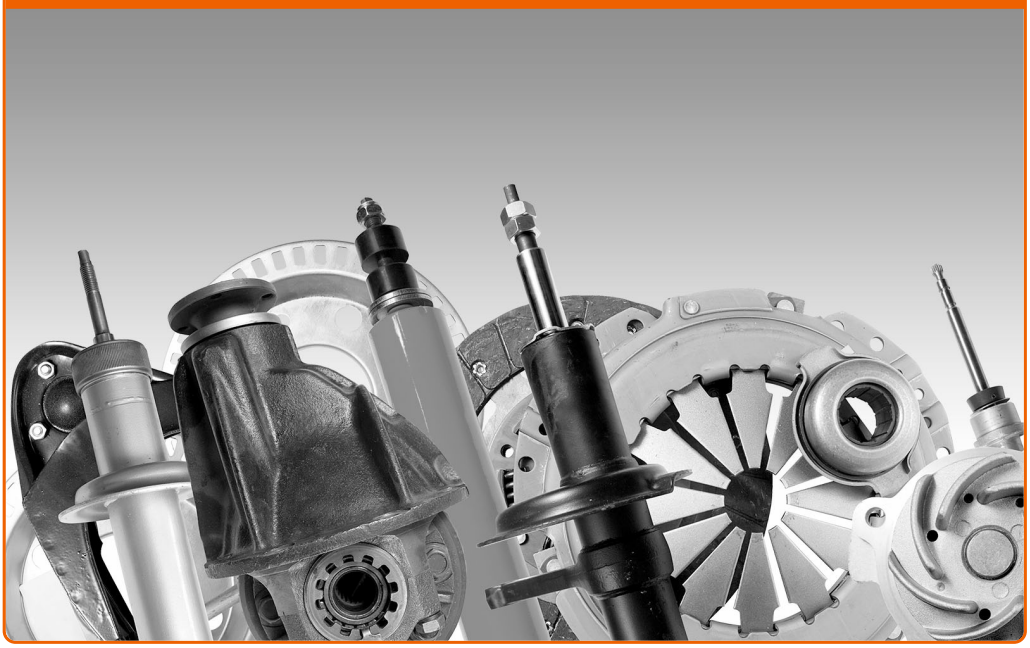

BUY SPARE PARTS FOR AUDI

FUEL FILTERS: A WIDE SELECTION

CHOOSE CAR PARTS FOR AUDI A6 C6/4F

FUEL FILTERS FOR AUDI: BUY NOW

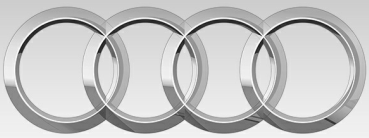

FUEL FILTERS FOR AUDI A6 C6/4F: THE BEST DEALS & OFFERS

ⓘ Disclaimer:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2018 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by Autodoc GmbH.