



How to change fuel filter
on **Renault Twingo C06** –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

RENAULT Megane III Coupe (DZ) 2.0 TCe, RENAULT Megane CC (EZ) 1.6 16V, RENAULT Megane CC (EZ) 2.0 CVT, RENAULT Megane III Grandtour (KZ) 1.5 dCi, RENAULT Megane III Hatchback (BZ0/1) 1.5 dCi, RENAULT Rapid Van (F40, G40) 1.2, RENAULT Clio I Hatchback 1.2, RENAULT Clio I Hatchback 1.4, RENAULT Clio I Hatchback 1.8 16V, RENAULT Clio I Hatchback 1.8, RENAULT Twingo I Hatchback 1.2, RENAULT Kangoo I Express (FC) 1.6 16V bivalent, RENAULT Laguna I Hatchback (B56) 1.8, RENAULT Laguna I Hatchback (B56) 3.0, RENAULT Laguna I Hatchback (B56) 2.0, (+ 351)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – RENAULT TWINGO C06.
TOOLS YOU NEED:



- All-purpose cleaning spray
- Fuel line pliers
- Phillips screwdriver
- Fluid container

BUY TOOLS

Replacement: fuel filter – Renault Twingo C06. Tip:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

**REPLACEMENT: FUEL FILTER – RENAULT TWINGO C06.
RECOMMENDED SEQUENCE OF STEPS:**

1

Open the fuel door.



2

Unscrew the fuel filler cap.




3


Lift the car using a jack or place it over an inspection pit.



4 Loosen the fuel filter mounting. Use a Phillips screwdriver.

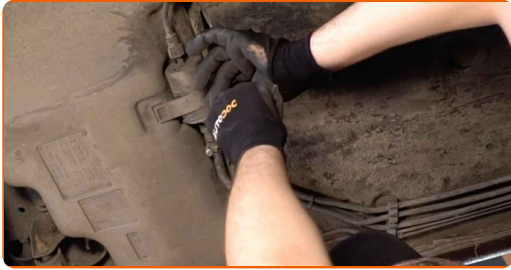


5 Prepare a container for fluids.

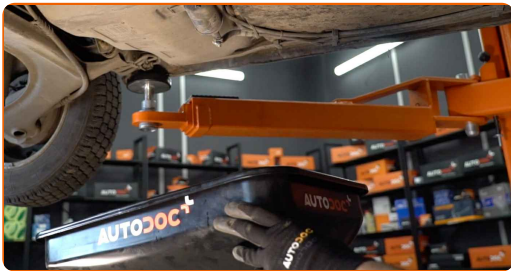

6 Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



7 Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use fuel line pliers.

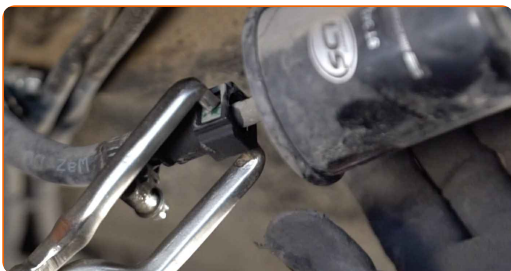


Replacement: fuel filter – Renault Twingo C06. Tip from AUTODOC experts:

- Be careful! Fuel may leak from the filter housing and hoses.

8

Remove the fuel filter. Put the old filter cartridge in the container.

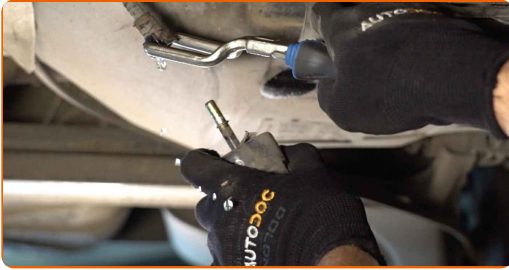

9

Install a new fuel filter.




AUTODOC recommends:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Renault Twingo C06 – It's important to only use high-quality filters.

10

Connect the fuel supply lines to the fuel filter.

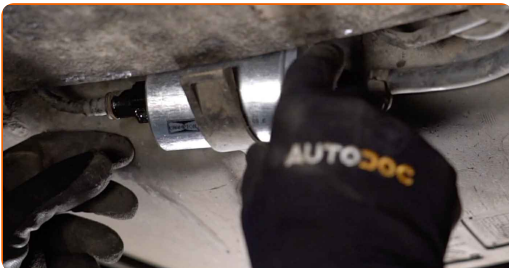


11 Tighten the fuel filter fasteners. Use a Phillips screwdriver.



12 Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



13 Take the fluid container away from under the fuel filter.

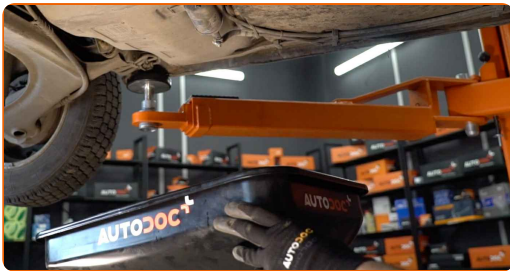


14 Lower the car.



15 Tighten the fuel filler cap.




16 Close the fuel door.

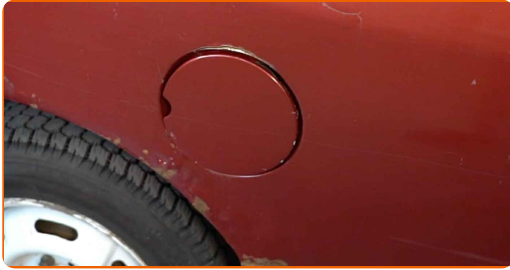


Replacement: fuel filter – Renault Twingo C06. Tip:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

17 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

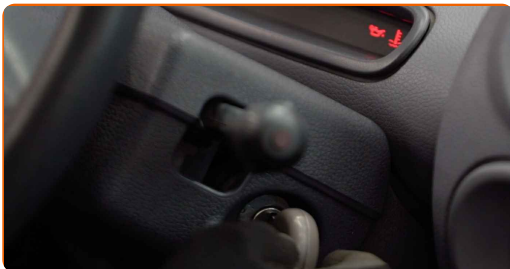

18 Shut off the engine.

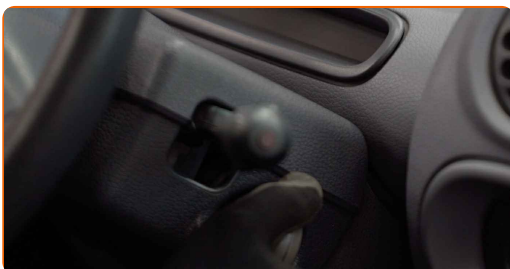

Replacement: fuel filter – Renault Twingo C06. AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC+

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR RENAULT

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR RENAULT TWINGO C06

FUEL FILTER FOR RENAULT: BUY NOW

**FUEL FILTER FOR RENAULT TWINGO C06: THE BEST DEALS
& OFFERS**

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.