




How to change rear
wheel bearing on
Renault Clio 2 –
replacement guide

VIDEO TUTORIAL

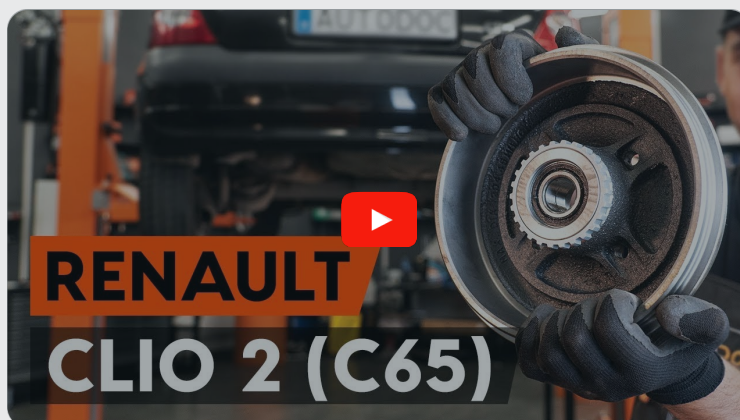

ⓘ Important!

This replacement procedure can be used for:

RENAULT 19 I Hatchback 1.4 KAT, RENAULT 19 I Hatchback 1.7, RENAULT 19 I Hatchback 1.9 D, RENAULT 19 I Chamade 1.9 D, RENAULT 19 II Chamade 1.9 D, RENAULT 19 II Hatchback 1.9 D, RENAULT 19 II Chamade 1.4, RENAULT 19 II Hatchback 1.4, RENAULT 19 II Hatchback 1.7, RENAULT 19 II Chamade 1.7, RENAULT 19 II Convertible 1.7, RENAULT 19 I Chamade 1.7, RENAULT 19 II Hatchback 1.8 16V, RENAULT 19 I Chamade 1.8 16V, RENAULT 19 I Hatchback 1.8 16V, (+ 120)

The steps may slightly vary depending on the car design.

REPLACEMENT: WHEEL BEARING – RENAULT CLIO 2.
LIST OF THE TOOLS YOU'LL NEED:



- Wire brush
- WD-40 spray
- All-purpose cleaning spray
- Copper grease
- Drive socket # 30
- Wheel impact socket #19
- Rubber mallet
- Tap wrench
- Hammer
- Crow bar
- Wheel chock


BUY TOOLS

Replacement: wheel bearing – Renault Clio 2. AUTODOC experts recommend:


- Do not re-use the bearing assembly of your Renault Clio 2 car.
- The wheel hub bearing replacement procedure is identical for both wheels on the same axle.
- Please note: all work on the car – Renault Clio 2 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1 Secure the wheels with chocks.

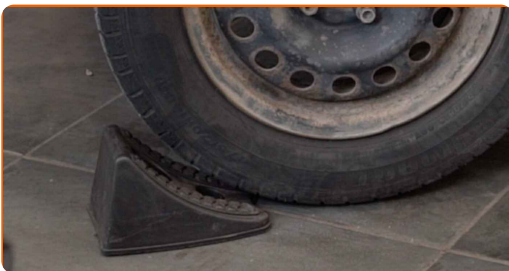

2 Loosen the wheel mounting bolts. Use wheel impact socket #19.

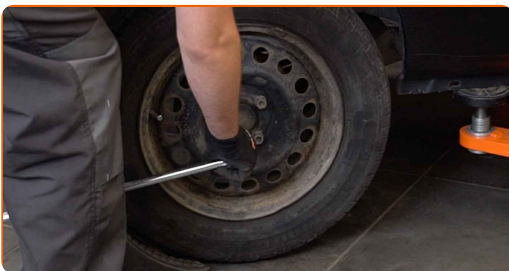

3 Raise the rear of the car and secure on supports.

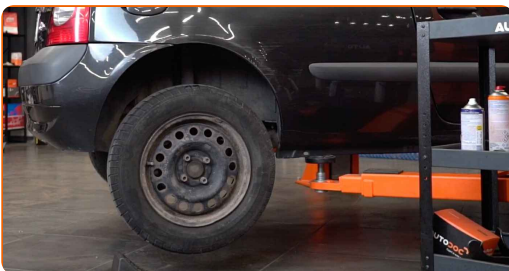


4 Unscrew the wheel bolts.



AUTODOC recommends:

- Important! Hold the wheel while unscrewing the fastening bolts. Renault Clio 2


5 Remove the wheel.

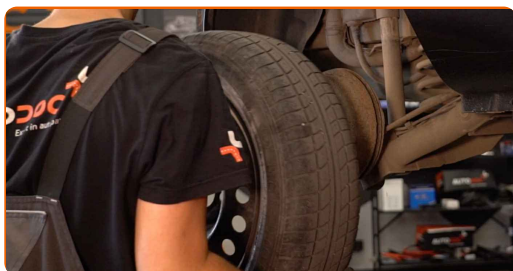

6 Clean the brake drum. Use a wire brush. Use WD-40 spray.



7 Remove the hub bearing protection cap. Use a hammer. Use a crowbar.

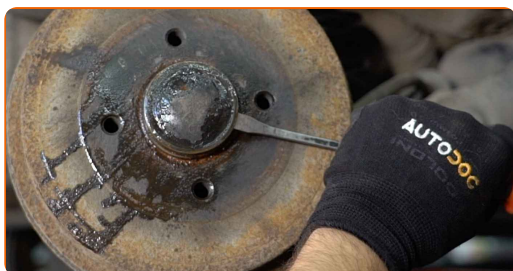


Replacement: wheel bearing – Renault Clio 2. Professionals recommend:

- Some cars are not equipped with wheel hub caps.


8

Unscrew the wheel hub axle nut. Use a drive socket #30. Use a tap wrench.

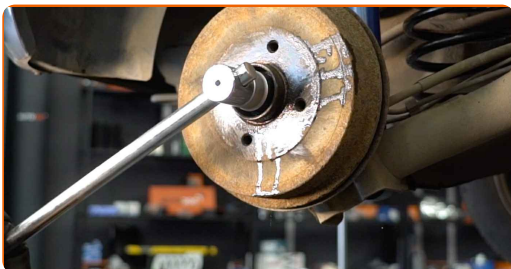


9

Remove the brake drum assembled with the wheel hub bearing.

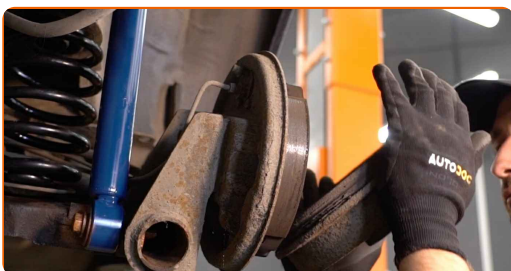


10

Clean the hub bearing mounting seat. Use all-purpose cleaning spray.

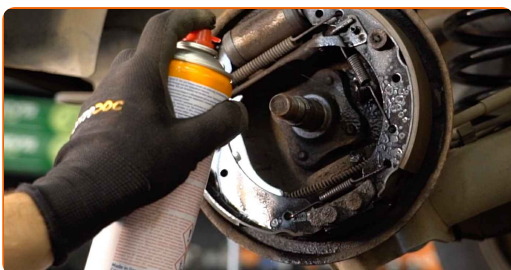


11

Install the new brake drum assembled with the wheel hub bearing.

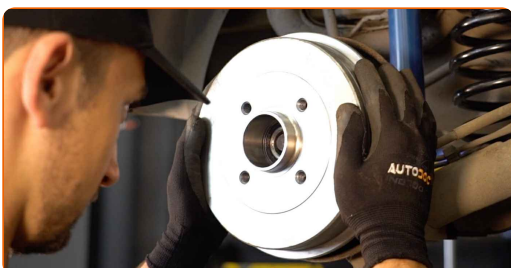


12 Tighten the hub. Use a drive socket #30. Use a torque wrench. Tighten it to 175 Nm torque.

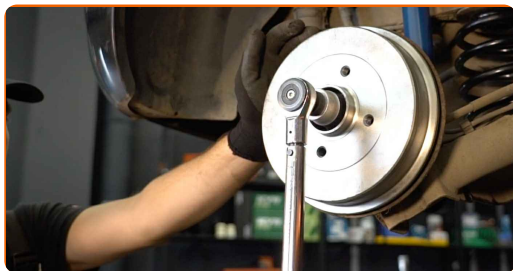


Replacement: wheel bearing – Renault Clio 2. AUTODOC experts recommend:

- The wheel bearing unit must not tilt on the axle pin.


13 Install the hub bearing protection cap. Use a rubber mallet.

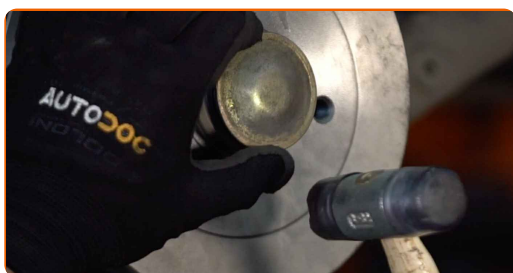

14 Treat the surface where the wheel rim contacts the brake drum. Use copper grease.

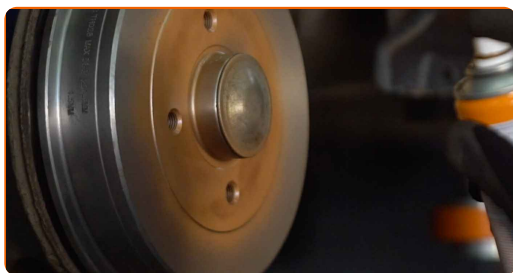


15 Install the wheel.

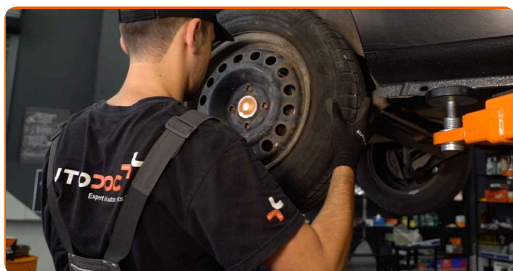


AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. Renault Clio 2

16 Screw in the wheel bolts. Use wheel impact socket #19.

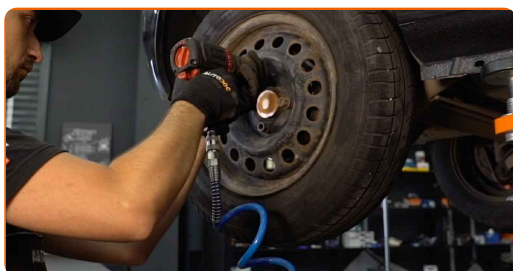

17 Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 90 nm torque.

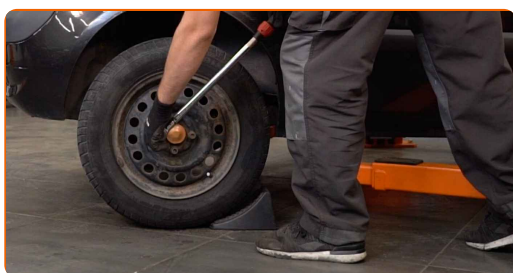

18

Remove the jacks and chocks.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR RENAULT

WHEEL BEARING: A WIDE SELECTION

CHOOSE CAR PARTS FOR RENAULT CLIO 2

WHEEL BEARING FOR RENAULT: BUY NOW

WHEEL BEARING FOR RENAULT CLIO 2: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.