



How to change pollen  
filter on **Ford Mondeo**  
**BWY** – replacement  
guide

## VIDEO TUTORIAL



### **i Important!**

This replacement procedure can be used for:

FORD MONDEO III Estate (BWY) 2.2 TDCi, FORD MONDEO III Saloon (B4Y) 1.8 16V, FORD MONDEO III Saloon (B4Y) 2.0 16V, FORD MONDEO III Saloon (B4Y) 2.5 V6 24V, FORD MONDEO III Saloon (B4Y) 2.0 16V DI / TDDi / TDCi, FORD MONDEO III Saloon (B4Y) 2.0 16V TDDi / TDCi, FORD MONDEO III (B5Y) 1.8 16V, FORD MONDEO III Estate (BWY) 1.8 16V, FORD MONDEO III (B5Y) 2.0 16V, FORD MONDEO III Estate (BWY) 2.0 16V, FORD MONDEO III (B5Y) 2.5 V6 24V, FORD MONDEO III Estate (BWY) 2.5 V6 24V, FORD MONDEO III (B5Y) 2.0 16V DI / TDDi / TDCi, FORD MONDEO III Estate (BWY) 2.0 16V DI / TDDi / TDCi, FORD MONDEO III (B5Y) 2.0 16V TDDi / TDCi, (+ 16)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – FORD MONDEO  
BWY. LIST OF THE TOOLS YOU'LL NEED:



- Torx bit T30
- Ratchet wrench
- Fender cover

**BUY TOOLS**


### Replacement: pollen filter – Ford Mondeo BWY. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Warning! Shut down the engine before starting any work – Ford Mondeo BWY.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the hood.

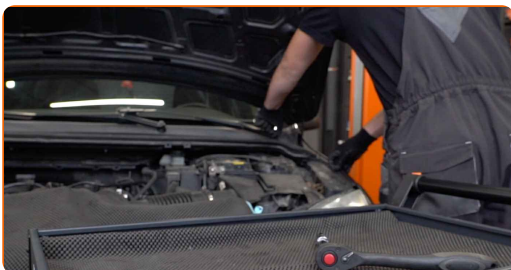


2


Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

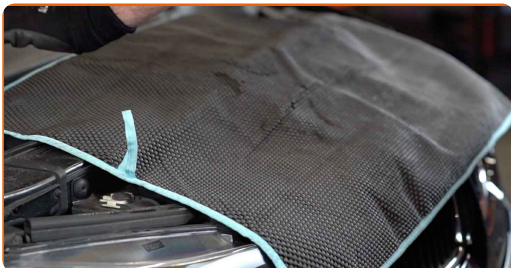


- 3 Unscrew the fastener of the wiper cowl grille located on the right side. Use Torx T30. Use a ratchet wrench.

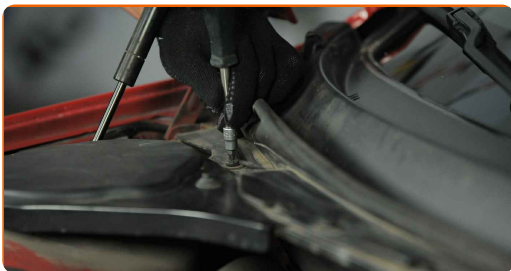

- 4 Raise a little the wiper cowl grille located on the right side.

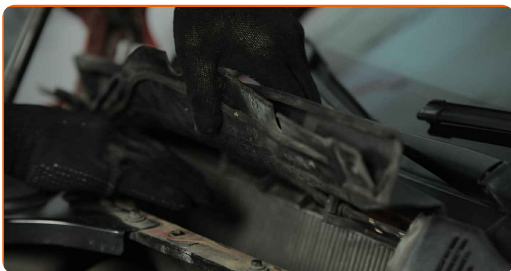

- 5 Remove the cabin filter.

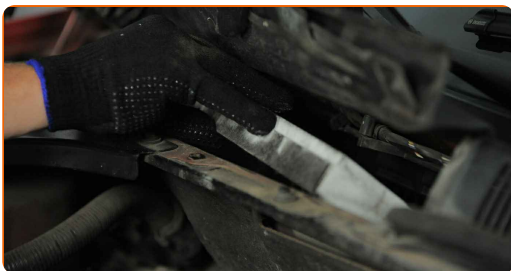

Replacement: pollen filter – Ford Mondeo BWY. Professionals recommend:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6

Install the cabin filter to its mounting seat.



### AUTODOC recommends:

- Follow the air flow direction arrow on the filter.
- Replacement: pollen filter – Ford Mondeo BWY. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.


7

Install and secure the wiper cowl grille located on the right side.




8

Screw in the fasteners of wiper cowl grille located on the right side. Use Torx T30. Use a ratchet wrench.

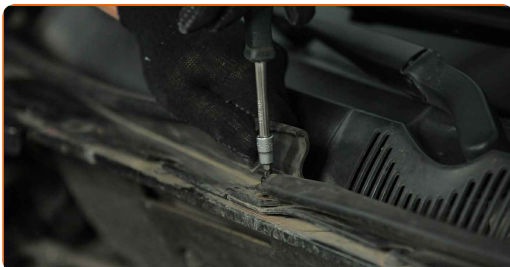

**9**


Remove the fender protection cover.

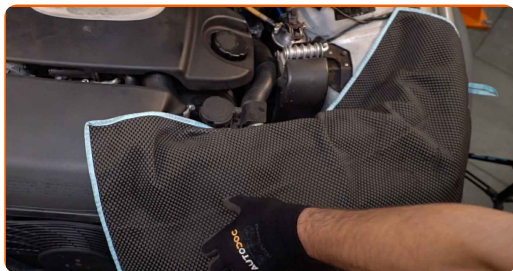**10**

Close the hood.

**11**

Switch on the ignition.

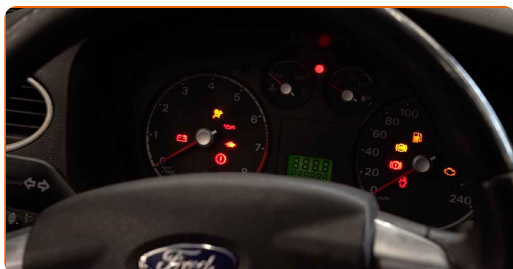**12**

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

**13**

Switch off the ignition.

**WELL DONE!** **VIEW MORE TUTORIALS**

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR FORD**

**POLLEN FILTER: A WIDE SELECTION**



**CHOOSE CAR PARTS FOR FORD MONDEO BWY**

**POLLEN FILTER FOR FORD: BUY NOW**

**POLLEN FILTER FOR FORD MONDEO BWY: THE BEST  
DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.