



How to change air filter  
on **Renault Clio 3** –  
replacement guide

## VIDEO TUTORIAL

** Important!**

This replacement procedure can be used for:

RENAULT MODUS / GRAND MODUS (F/JP0\_) 1.5 dCi 75, RENAULT MODUS / GRAND MODUS (F/JP0\_) 1.5 dCi 90, RENAULT Clio III Van (SB\_, SR\_) 1.5 dCi, RENAULT MODUS / GRAND MODUS (F/JP0\_) 1.2, RENAULT Clio III Hatchback (BR0/1, CR0/1) 1.2 16V, RENAULT CLIO Grandtour (KR0/1\_) 1.2 16V, RENAULT MODUS / GRAND MODUS (F/JP0\_) 1.6, RENAULT MODUS / GRAND MODUS (F/JP0\_) 1.5 dCi, RENAULT MODUS / GRAND MODUS (F/JP0\_) 1.4, RENAULT Clio III Hatchback (BR0/1, CR0/1) 1.6 16V, RENAULT Clio III Hatchback (BR0/1, CR0/1) 1.4 16V, RENAULT Clio III Hatchback (BR0/1, CR0/1) 1.5 dCi, RENAULT Clio III Hatchback (BR0/1, CR0/1) 2.0 16V Sport (CR0N, CR1P), RENAULT CLIO Grandtour (KR0/1\_) 1.6 16V, RENAULT Clio III Hatchback (BR0/1, CR0/1) 2.0 16V, (+ 13)

The steps may slightly vary depending on the car design.

REPLACEMENT: AIR FILTER – RENAULT CLIO 3. TOOLS  
YOU'LL NEED:



• Microfibre towel

• Fender cover


**BUY TOOLS**

Replacement: air filter – Renault Clio 3. AUTODOC experts recommend:


- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- Please note: all work on the car – Renault Clio 3 – should be done with the engine switched off.

**CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:**


**1** Open the bonnet.

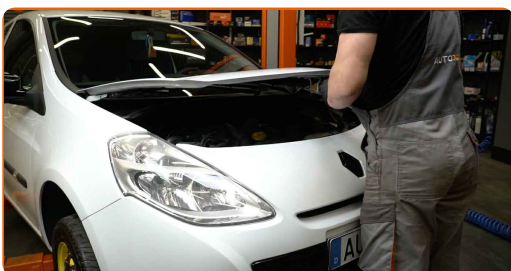

**2** Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

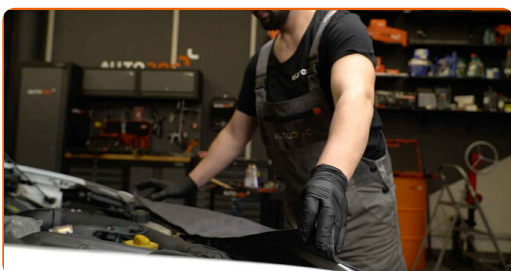

**3** Release the air filter cover clips.

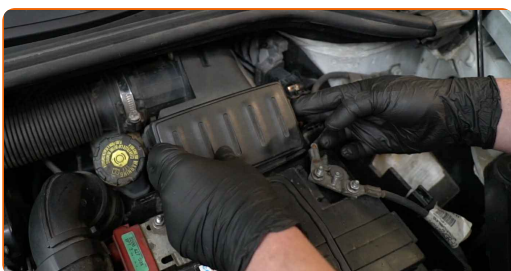


**4** Take off the filter lid.




**Replacement: air filter – Renault Clio 3. Professionals recommend:**

- Do not apply excessive force when removing the part. Otherwise you may damage it.

**5** Remove the air filter housing.

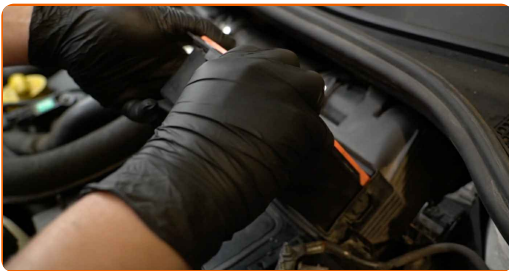

**6** Clean the air filter cover and housing.

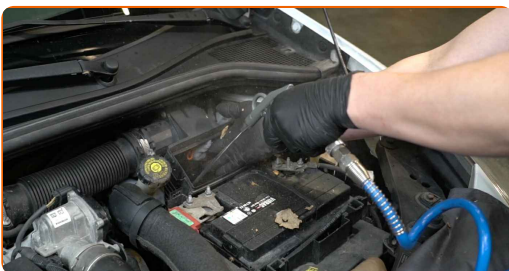


**Replacement: air filter – Renault Clio 3. Tip:**

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

**7** Remove the filter element from the filter housing.




**8** Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

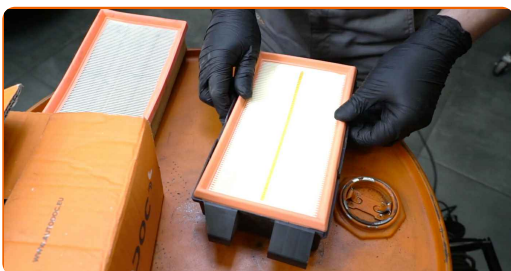

**AUTODOC recommends:**


- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – Renault Clio 3.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

**9** Reinstall the air filter housing.

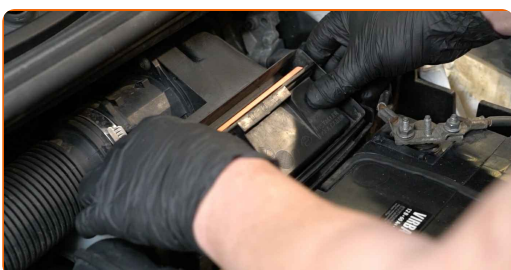

10

Reinstall the air filter cover. Fasten it.

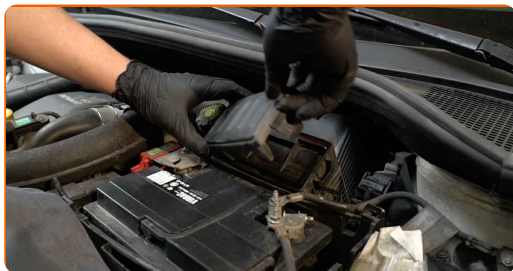


Replacement: air filter – Renault Clio 3. Tip from AUTODOC experts:

- When installing, do not use excessive force to avoid damage to the part.


11

Press the air filter cover clips into place.

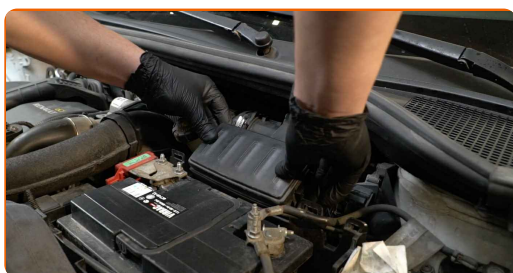

12

Remove the fender protection cover.

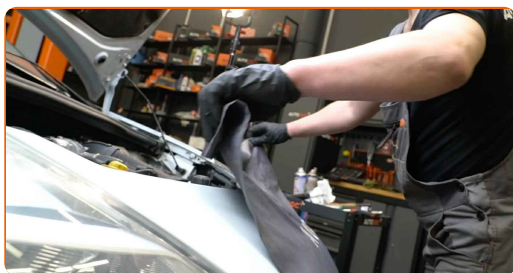

**13**

Close the hood.



**WELL DONE!** 

**VIEW MORE TUTORIALS**



# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  **Google Play**

 **Download on the App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR RENAULT**

**AIR FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR RENAULT CLIO 3**

**AIR FILTER FOR RENAULT: BUY NOW**

**AIR FILTER FOR RENAULT CLIO 3: THE BEST DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.