



How to change air filter
on **VW Polo 9N** –
replacement guide

VIDEO TUTORIAL

** Important!**

This replacement procedure can be used for:

VW Polo Hatchback (6R1, 6C1) 1.6 BiFuel, VW Polo Hatchback (6R1, 6C1) 1.4 BiFuel, VW Polo Saloon (602, 604, 612, 614) 1.6, VW GOLF PLUS (5M1, 521) 1.4 16V, VW Golf V Hatchback (1K1) 1.4 16V, VW Caddy III Estate (2KB, 2KJ, 2CB, 2CJ) 1.4, VW Caddy III Van (2KA, 2KH, 2CA, 2CH) 1.4, VW POLO (9N_) 1.6 16V, VW Golf V Variant (1K5) 1.4, VW POLO VIVO Hatchback 1.6 16V, VW POLO VIVO Hatchback 1.4, VW POLO VIVO Saloon 1.4, VW POLO VIVO Saloon 1.6, VW GOLF VI (5K1) 1.4, VW Polo Hatchback (6R1, 6C1) 1.4 (6R1), (+ 6)

The steps may slightly vary depending on the car design.

REPLACEMENT: AIR FILTER – VW POLO 9N. LIST OF THE TOOLS YOU'LL NEED:



- Phillips screwdriver
- Microfibre towel
- Fender cover

BUY TOOLS

Replacement: air filter – VW Polo 9N. Tip from AUTODOC experts:


- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- All work should be done with the engine stopped.

REPLACEMENT: AIR FILTER – VW POLO 9N. TAKE THE FOLLOWING STEPS:


1 Open the bonnet.



2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

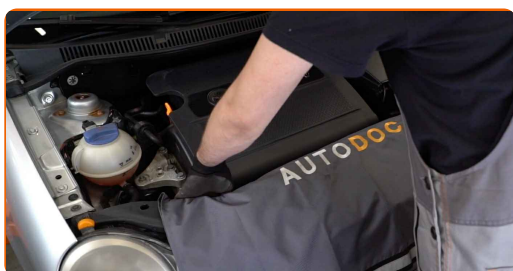


3 Detach the crankcase ventilation hose from the engine cover at the left.

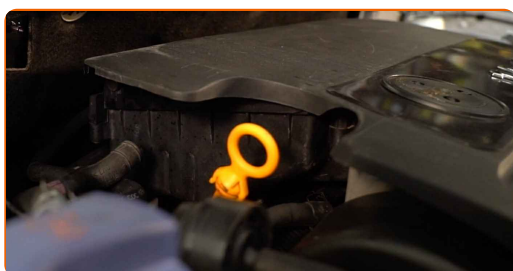

4

Remove the engine cover. The air filter housing is integrated into the engine cover.

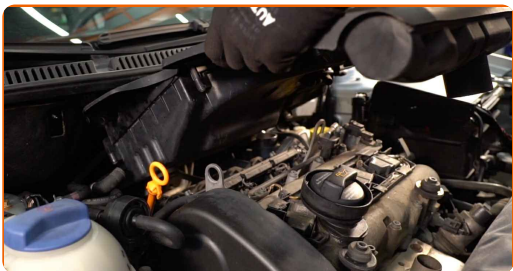


Replacement: air filter – VW Polo 9N. Tip from AUTODOC:

- Raise the engine cover, holding it on two sides simultaneously.


5

Cover the throttle body with a microfibre towel to prevent dust and dirt from getting into the system.

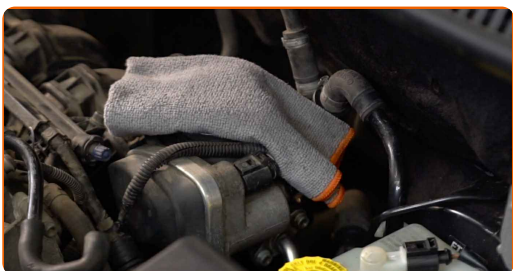

6

Undo the fastening screws of the air filter cover. Use a Phillips screwdriver.

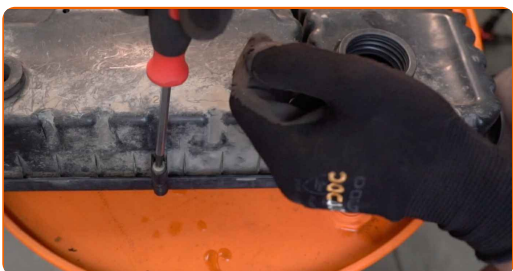

7 Take off the filter lid.



8 Remove the filter element from the filter housing.



9 Clean the air filter cover and housing.



Replacement: air filter – VW Polo 9N. Tip:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

10

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: air filter – VW Polo 9N. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

11

Reinstall the air filter cover. Fasten it.



12

Screw in the fastening screws of the air filter cover. Use a Phillips screwdriver.



13 Remove the microfibre towel from the throttle body.




14 Install the engine cover and secure it. Make sure you hear a click indicating that it is locked in place.



AUTODOC recommends:

- Replacement: air filter – VW Polo 9N. Do not use excessive force during installation. This may damage the fasteners.

15 Attach the crankcase ventilation hose to the engine cover at the left.

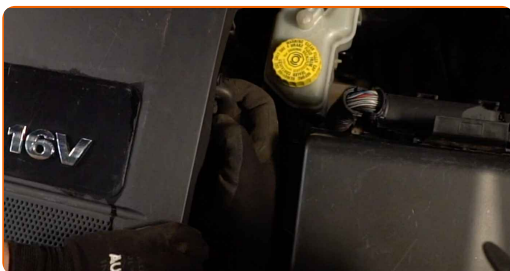

16

Remove the fender protection cover.



17

Close the hood.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VOLKSWAGEN

AIR FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW POLO 9N

AIR FILTER FOR VW: BUY NOW

AIR FILTER FOR VW POLO 9N: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.