



How to change pollen  
filter on **Audi A6 C5**  
**Avant** – replacement  
guide

## VIDEO TUTORIAL



### Important!

This replacement procedure can be used for:

AUDI 100 C3 Saloon (44, 44Q) 1.8 CAT, AUDI 100 C3 Saloon (44, 44Q) 2.0 CAT, AUDI 100 C3 Saloon (44, 44Q) 2.2 Turbo, AUDI 100 C3 Saloon (44, 44Q) 2.3 E, AUDI 100 C3 Saloon (44, 44Q) 2.0 D Turbo, AUDI 100 C3 Saloon (44, 44Q) 2.5 TDI, AUDI 100 C3 Saloon (44, 44Q) 1.8 quattro, AUDI 100 C3 Saloon (44, 44Q) 1.8 Cat quattro, AUDI 100 C3 Saloon (44, 44Q) 2.2 E Turbo quattro, AUDI 100 C3 Saloon (44, 44Q) 2.3 E quattro, AUDI 100 C4 Saloon (4A2) 2.4 D, AUDI 100 C4 Saloon (4A2) 2.5 TDI, AUDI 100 C4 Saloon (4A2) 2.0, AUDI 100 C4 Saloon (4A2) 2.0 E, AUDI 100 C4 Saloon (4A2) 2.3 E, (+ 98)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – AUDI A6 C5 AVANT.  
TOOLS YOU MIGHT NEED:



- Fender cover

[BUY TOOLS](#)


Replacement: pollen filter – Audi A6 C5 Avant. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – Audi A6 C5 Avant – should be done with the engine switched off.

**CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:**

1

Open the hood.

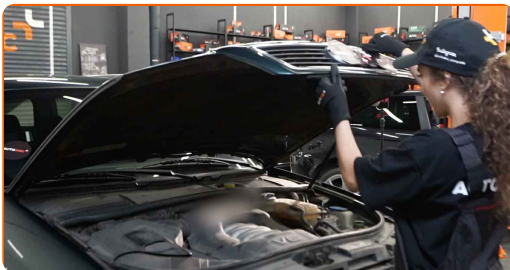


2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.




3

Remove the cowl grille seal.

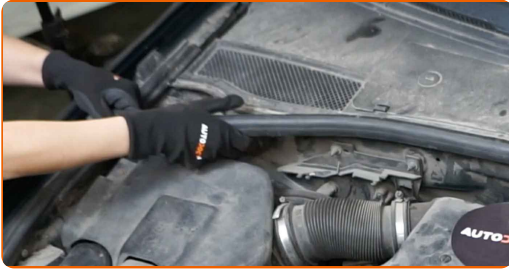


4

Raise up and remove the cowl grille.

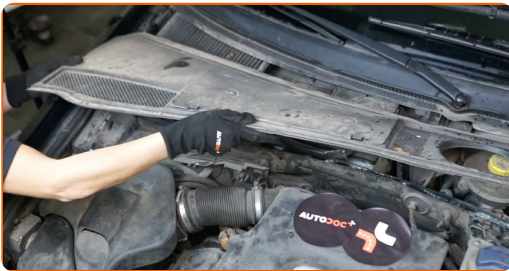

5

Remove the cabin filter.

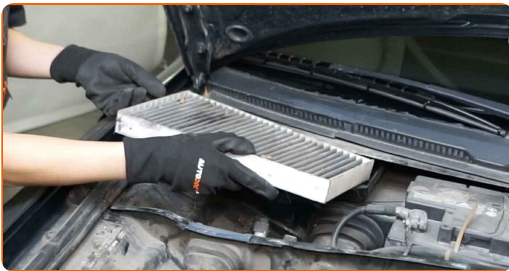

Replacement: pollen filter – Audi A6 C5 Avant. Professionals recommend:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6

Switch on the ignition.

7

Close the heater flap.




8

Switch off the ignition.

9

Clean the cabin filter housing and cover.

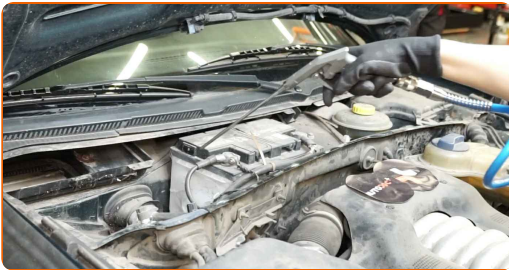


Replacement: pollen filter – Audi A6 C5 Avant. Tip from AUTODOC:

- Remove any debris from the cabin filter housing carefully to prevent contamination of the ventilation duct.

10

Install the cabin filter to its mounting seat.

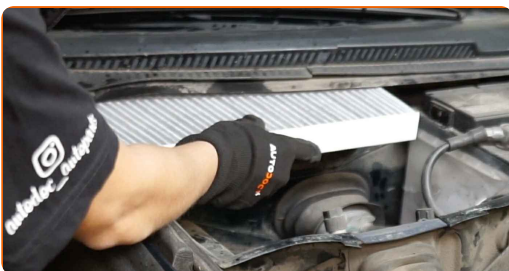


Follow the air flow direction arrow on the filter.

- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – Audi A6 C5 Avant.

11

Install and secure the cowl grille.

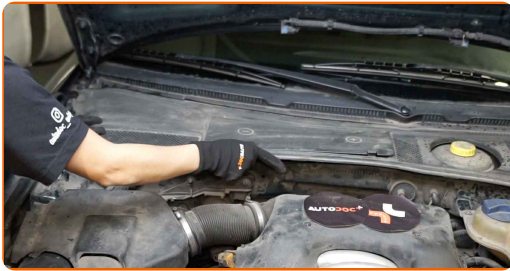

12

Install the cowl grille seal.



13

Switch on the ignition. The heater flap will automatically return to its normal position.

14

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.






15 Switch off the ignition.

16 Remove the fender protection cover.



17 Close the hood.

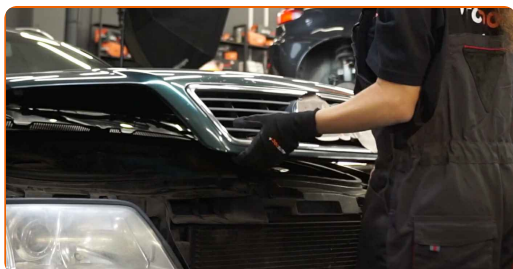

**WELL DONE!** 

[VIEW MORE TUTORIALS](#)



# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**AUTODOC+**

GET IT ON  
 **Google Play**

Download on the  
 **App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR AUDI**

**POLLEN FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR AUDI A6 C5 AVANT**

**POLLEN FILTER FOR AUDI: BUY NOW**

**POLLEN FILTER FOR AUDI A6 C5 AVANT: THE BEST DEALS  
& OFFERS**

### **ⓘ DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.