



How to change air filter  
on **Abarth 595** –  
replacement guide

## VIDEO TUTORIAL



### Important!

This replacement procedure can be used for:

ABARTH 500 / 595 / 695 Hatchback (312) 1.4 (312.AXF11), ABARTH 500 / 595 / 695 Hatchback (312) 1.4 (312.AXT1A), ABARTH 500C / 595C / 695C Convertible (312) 1.4 (312.AXF1A), ABARTH 500C / 595C / 695C Convertible (312) 1.4 (312.AXF1A, 312.AXD1A), ABARTH 500 / 595 / 695 Hatchback (312) 1.4 (312.AXD1A), ABARTH 500 / 595 / 695 Hatchback (312) 1.4 (312.AXF11, 312.AXF1A, 312.AXD1A), ABARTH 500C / 595C / 695C Convertible (312) 1.4 (312.AXF11), ABARTH 500C / 595C / 695C Convertible (312) 1.4 (312.AXD1A)

The steps may slightly vary depending on the car design.

## REPLACEMENT: AIR FILTER – ABARTH 595. TOOLS YOU MIGHT NEED:



- Drive socket # 8
- Ratchet wrench
- Microfibre towel
- Fender cover


[BUY TOOLS](#)

**AUTODOC recommends:**


- Replacement: air filter – Abarth 595. Do not ignore the maintenance schedule, recommendations, and requirements specified by the manufacturer on the use of the car part.
- All work should be done with the engine stopped.

**REPLACEMENT: AIR FILTER – ABARTH 595. RECOMMENDED SEQUENCE OF STEPS:**

**1** Open the bonnet.

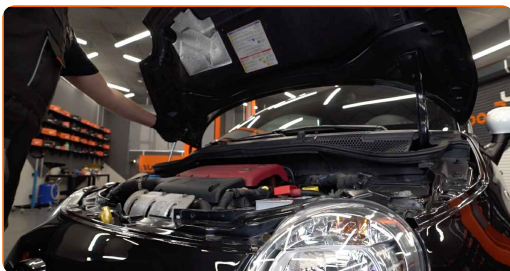

**2** Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

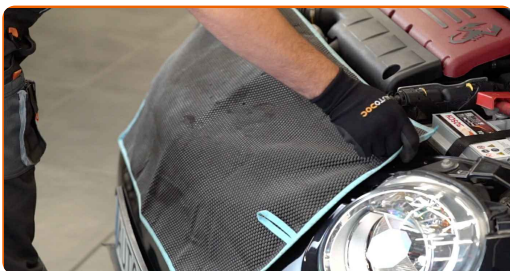


**3** Undo the fastening screws of the air filter cover (3 pieces). Use a drive socket #8. Use a ratchet wrench.



4 Take off the filter lid.




5 Remove the filter element from the filter housing.

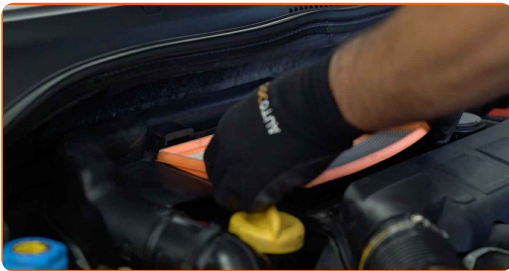

6 Cover the intake manifold passages with a microfibre towel to prevent dust and dirt from getting inside.



7 Clean the air filter cover and housing.

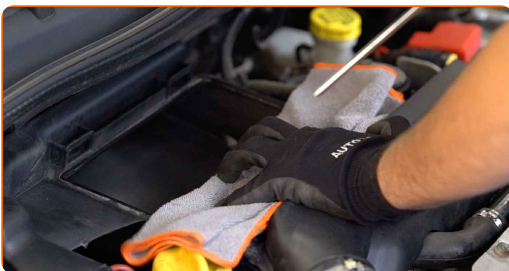


Replacement: air filter – Abarth 595. Tip from AUTODOC experts:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

8

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

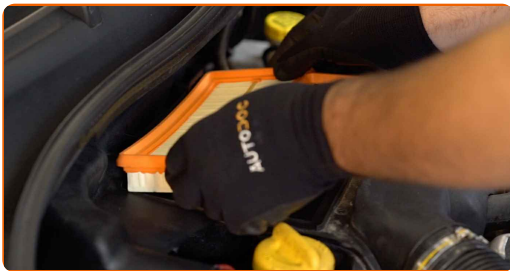


AUTODOC recommends:

- Replacement: air filter – Abarth 595. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

9

Reinstall the air filter cover. Fasten it.

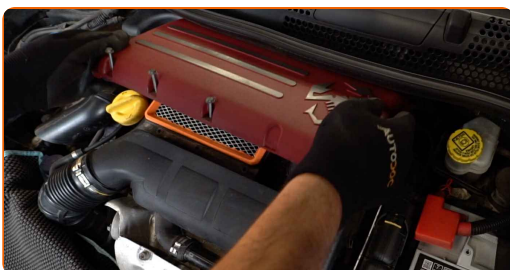


10

Screw in the fastening screws of the air filter cover (3 pieces). Use a drive socket #8. Use a ratchet wrench.



11

Remove the fender protection cover.

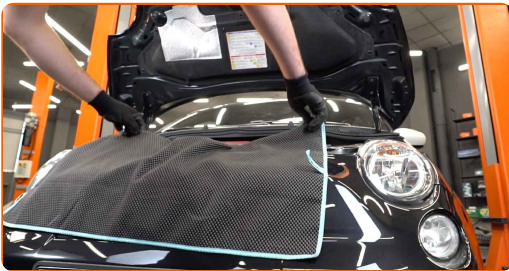

12

Close the hood.



**WELL DONE!** 

[VIEW MORE TUTORIALS](#)

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



The image shows two smartphones displaying the Autodoc mobile app. The left phone shows a search bar with the text '2-1 Pritsche (901, 902) 208 CDI (82 PS, 8J ab ... 2.4 d engine)'. Below the search bar is a 'TODAY'S OFFERS' section featuring a tire and a filter, with a countdown timer showing '00:08:12:27'. Below that is a 'CATEGORIES' section with icons for 'Axel Mounting Steering Wheel' and 'Spark, G...'. The right phone shows the Autodoc logo and a collection of car parts including wheels, tires, and engine components.

**AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR ABARTH**

**AIR FILTER: A WIDE SELECTION**



**CHOOSE CAR PARTS FOR ABARTH 595**

**AIR FILTER FOR ABARTH: BUY NOW**

**AIR FILTER FOR ABARTH 595: THE BEST DEALS & OFFERS**

### **ⓘ DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.