



How to change tailgate
struts on **Toyota Aygo**
AB1 – replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:

TOYOTA Aygo (AB10) 1, TOYOTA Aygo (AB10) 1.4 HDi, TOYOTA Aygo (AB10) 1.0 GPL (KGB10_)

The steps may slightly vary depending on the car design.

REPLACEMENT: TAILGATE STRUTS – TOYOTA AYGO AB1. TOOLS YOU MIGHT NEED:

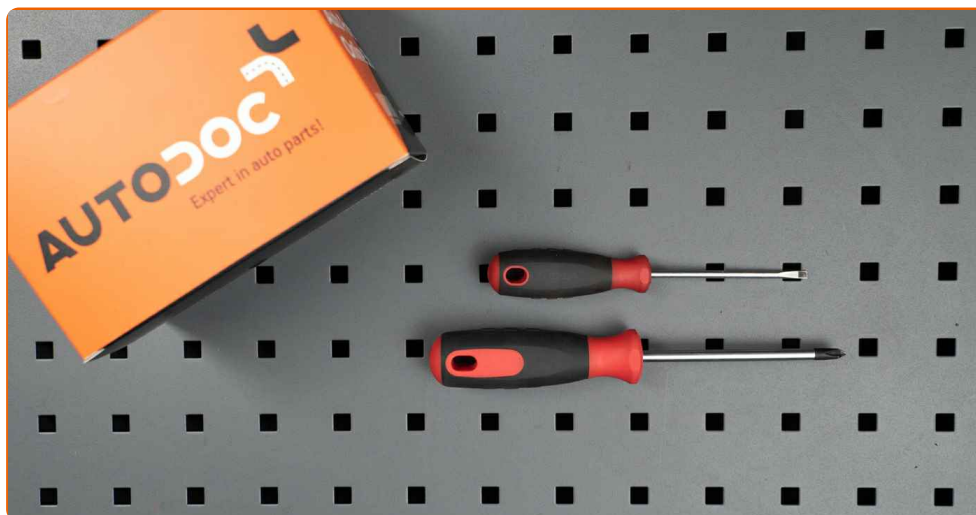

- Flat Screwdriver
- Phillips screwdriver
- Hydraulic transmission jack

BUY TOOLS

Replacement: tailgate struts – Toyota Aygo AB1. AUTODOC recommends:

- Right and left gas struts of the boot lid should be replaced simultaneously.
- The replacement procedure is identical for the right and left gas struts of the boot lid.
- All work should be done with the engine stopped.

REPLACEMENT: TAILGATE STRUTS – TOYOTA AYGO AB1. RECOMMENDED SEQUENCE OF STEPS:


1

Open the boot lid.




2


Support the boot lid. Use a hydraulic transmission jack.

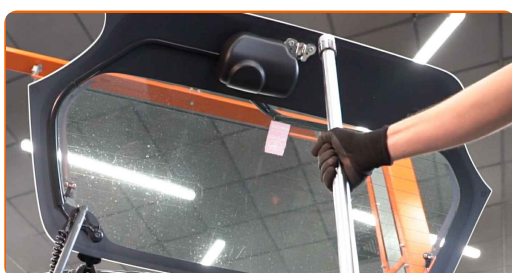


- 3 Move the folding shelf and detach it from the retainers. By doing this, you will get access to the side trim plastic panels.

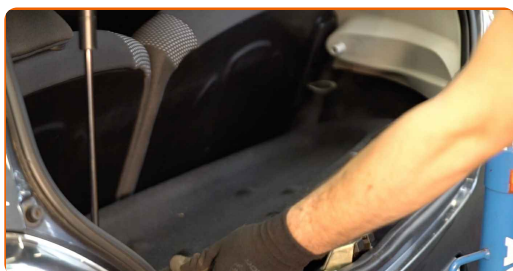


- 4 Unscrew the fastener of the boot side lining. Use a Phillips screwdriver.

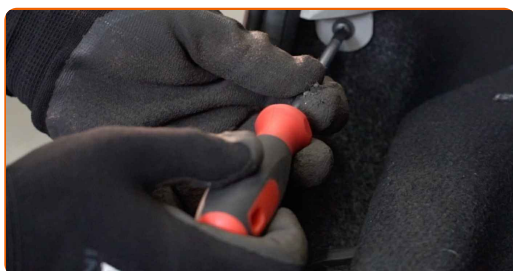

- 5 Remove the boot side lining.

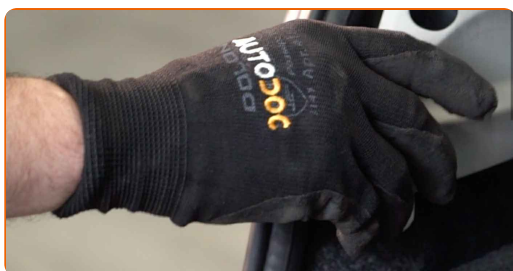


- 6 Release the circlip connecting the gas strut to the boot lid. Use a flat screwdriver.

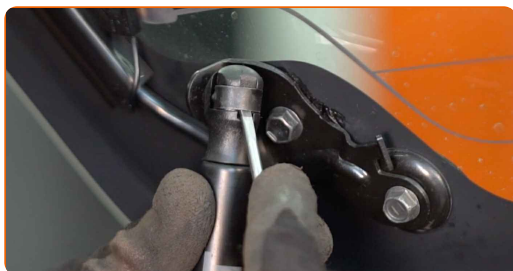

7

Release the circlip connecting the gas strut to the car body. Use a flat screwdriver.

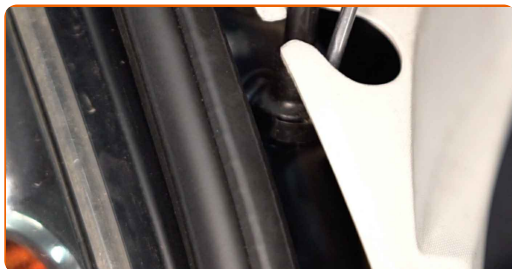


Replacement: tailgate struts – Toyota Aygo AB1. Tip:

- To avoid any injuries, be sure to hold the boot lid while demounting the gas struts.


8

Remove the boot lid gas strut.

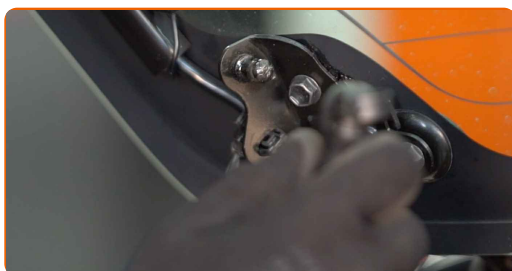

9

Install the new boot lid gas strut.

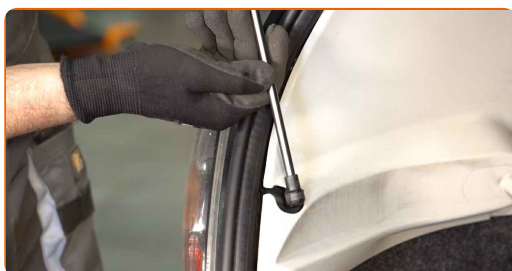


Replacement: tailgate struts – Toyota Aygo AB1. AUTODOC experts recommend:

- To avoid any injuries, be sure to hold the boot lid while installing the gas strut.

10

Snap on the circlip connecting the gas strut to the car body.

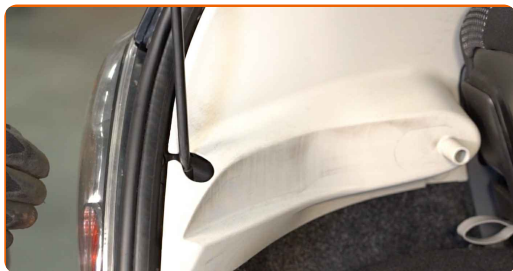


11

Snap on the circlip connecting the gas strut to the boot lid.



12

Remove the hydraulic transmission jack.

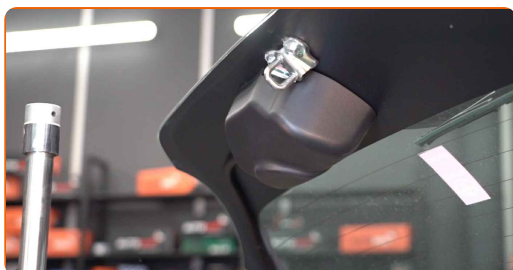


AUTODOC recommends:

- Replacement: tailgate struts – Toyota Aygo AB1. Lower the transmission jack smoothly, without jerks, to avoid damaging components and mechanisms.


13

Attach the side lining of the boot.

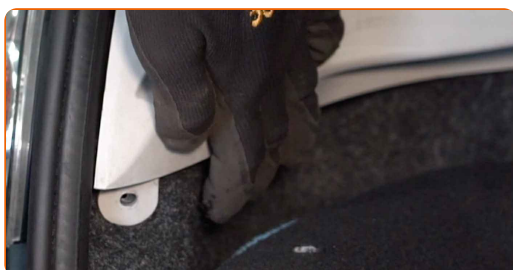


14

Screw in the fastener of the boot side lining. Use a Phillips screwdriver.

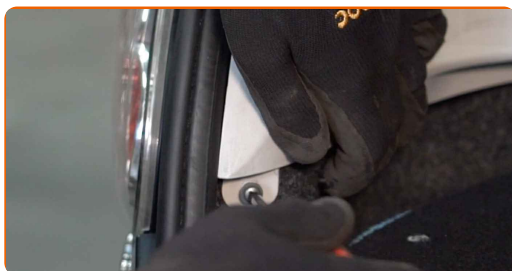


15

Install the folding shelf to its mounting seat.

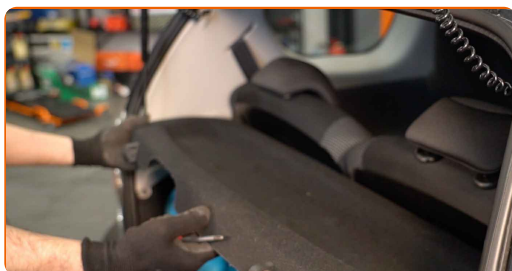


16

Check the working condition of the boot lid gas springs after they are installed.

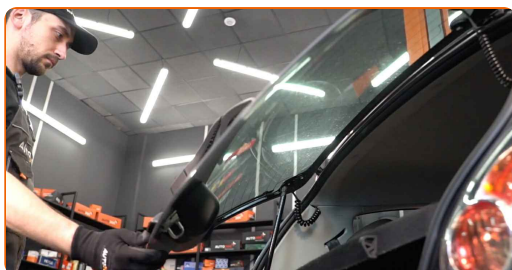

17

Close the lid of the luggage compartment.

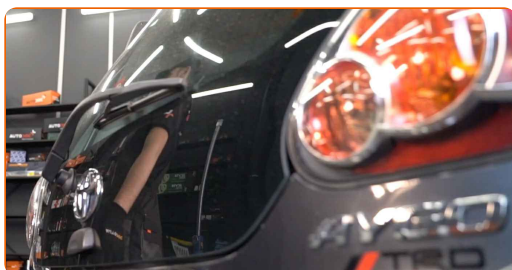

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR TOYOTA

TAILGATE STRUTS: A WIDE SELECTION

[**CHOOSE CAR PARTS FOR TOYOTA AYGO AB1**](#)[**TAILGATE STRUTS FOR TOYOTA: BUY NOW**](#)[**TAILGATE STRUTS FOR TOYOTA AYGO AB1: THE BEST
DEALS & OFFERS**](#)

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.