



How to change fuel filter
on **VW Passat 3C B6**
Variant – replacement
guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:

VW Caddy III Van (2KA, 2KH, 2CA, 2CH) 1.9 TDI 4motion, VW Passat Variant (3C5) 2.0 TDI, VW Jetta IV (162, 163, AV3, AV2) 1.6 TDI, VW Golf VI Convertible (517) 1.6 TDI, VW TIGUAN (5N_) 2.0 TDI 4motion, VW TOURAN (1T3) 2.0 TDI, VW Eos (1F7, 1F8) 2.0 TDI, VW Caddy III Van (2KA, 2KH, 2CA, 2CH) 2.0 TDI 4motion, VW Caddy III Van (2KA, 2KH, 2CA, 2CH) 2.0 TDI, VW Caddy III Estate (2KB, 2KJ, 2CB, 2CJ) 2.0 TDI 16V 4motion, VW Caddy III Van (2KA, 2KH, 2CA, 2CH) 2.0 TDI 16V 4motion, VW SCIROCCO (137, 138) 2.0 TDI, VW Passat CC (357) 2.0 TDI, VW Caddy III Estate (2KB, 2KJ, 2CB, 2CJ) 2.0 TDI, VW TOURAN (1T1, 1T2) 2.0 TDI, (+ 49)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW PASSAT B6 3C
VARIANT. LIST OF THE TOOLS YOU'LL NEED:

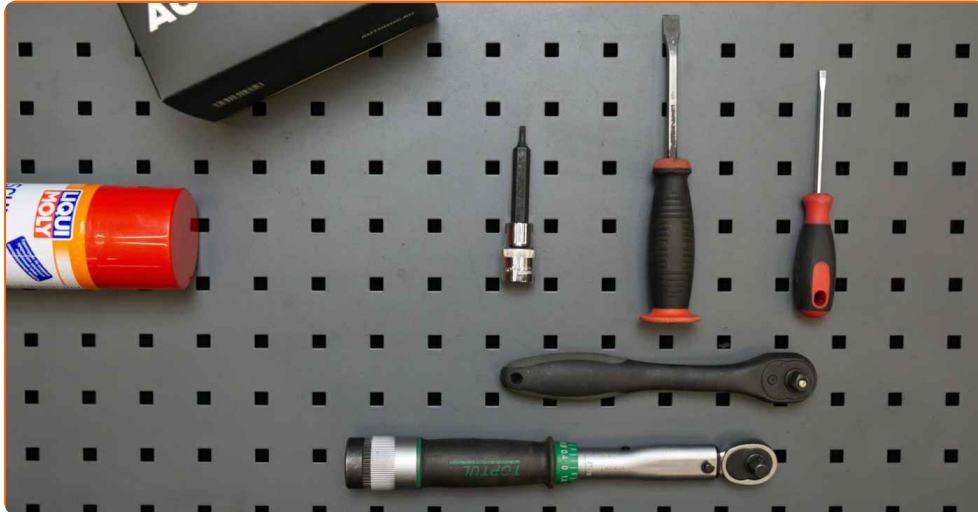

- All-purpose cleaning spray
- Torx bit T20
- Ratchet wrench
- Torque wrench
- Fluid container
- Flat Screwdriver
- Crow bar
- Microfibre towel
- Fender cover


BUY TOOLS

Replacement: fuel filter – Passat Variant B6. Tip:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – VW PASSAT 3C5. USE THE FOLLOWING PROCEDURE:

1 Open the bonnet.

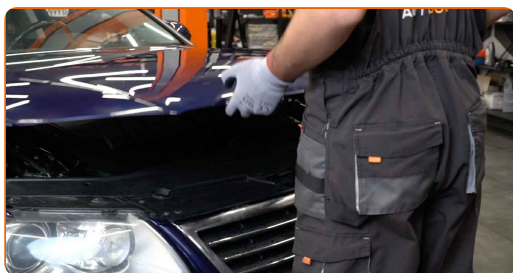


2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.




3 Clean the fuel filter. Use all-purpose cleaning spray.




4 Unscrew the fasteners of the fuel filter housing cover. Use Torx T20. Use a ratchet wrench.

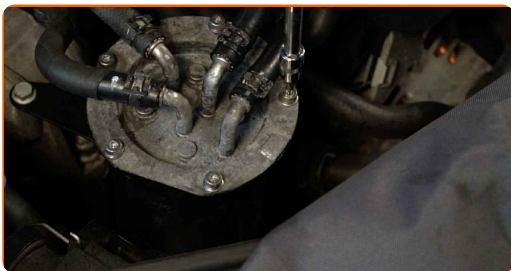

5 Lift the fuel filter cover up a little. Use a crowbar.

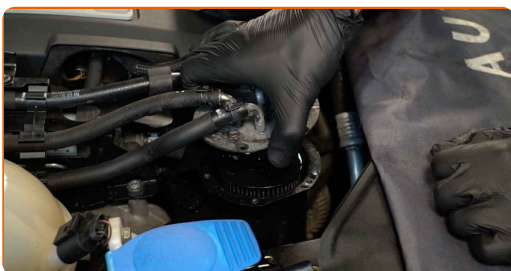


6 Remove the fuel filter.

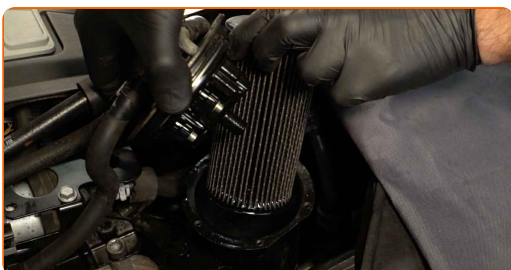

7 Put the old filter cartridge in the container.



8 Cover the fuel filter housing with a microfibre cloth to prevent dirt and foreign objects from getting into the system.

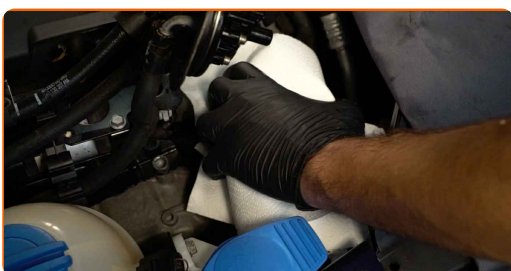


9 Clean the fuel filter housing and the cover. Use all-purpose cleaning spray.




10 Remove the rubber strip. Use a flat screwdriver.



11 Install the rubber strip.

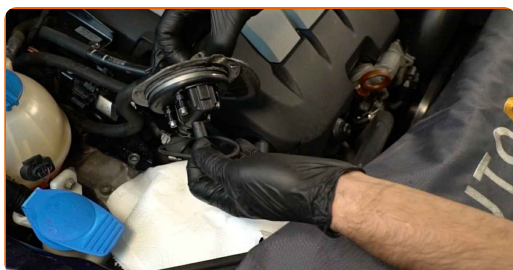

12 Remove the microfibre cloth from the fuel filter housing.

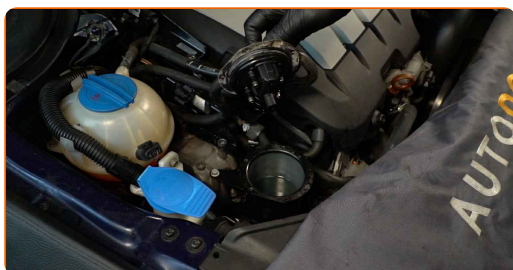

13 Install a new fuel filter.




Replacement: fuel filter – VW Passat 3C5. Professionals recommend:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Passat B6 3C Variant – It's important to only use high-quality filters.


14

Install and tighten the cap of the fuel filter housing. Use Torx T20. Use a ratchet wrench.

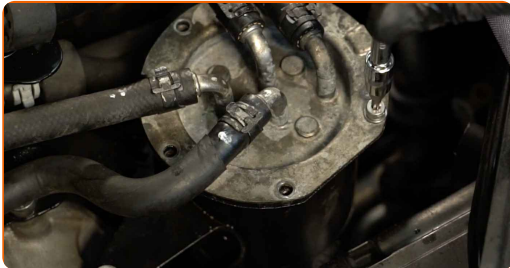

15

Tighten the fasteners of the fuel filter housing cover. Use Torx T20. Use a ratchet wrench. Use a torque wrench. Tighten it to 9 nm torque.

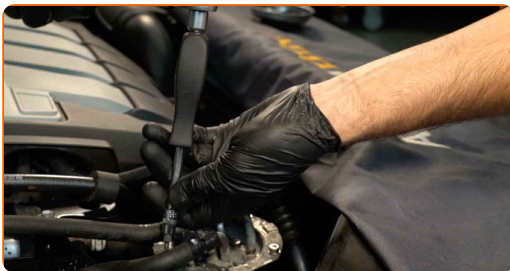

AUTODOC recommends:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

16 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.




17 Shut off the engine.

18 Remove the fender protection cover.



19 Close the hood.

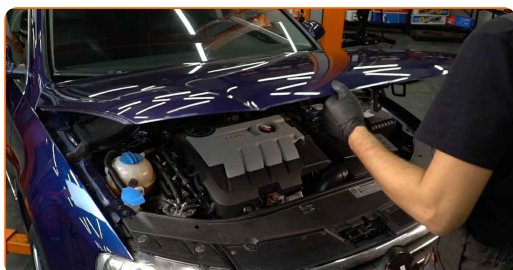

Replacement: fuel filter – Passat Variant B6. AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VOLKSWAGEN

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW PASSAT 3C B6 VARIANT

FUEL FILTER FOR VW: BUY NOW

FUEL FILTER FOR VW PASSAT 3C B6 VARIANT: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.