



How to change fuel filter
on **VW Passat B7 saloon**
– replacement guide

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

VW Passat B7 Saloon (362) 1.6 TDI, VW Passat B7 Saloon (362) 2.0 TDI, VW Passat B7 Saloon (362) 2.0 TDI 4motion, VW Passat B7 Variant (365) 1.6 TDI, VW Passat B7 Variant (365) 2.0 TDI, VW Passat B7 Variant (365) 2.0 TDI 4motion, VW Sharan II (7N1, 7N2) 2.0 TDI 4motion, VW Sharan II (7N1, 7N2) 2.0 TDI, VW Tiguan I (5N) 2.0 TDI 4motion, VW Passat CC (357) 2.0 TDI, VW CC (358) 2.0 TDI, VW Tiguan I (5N) 2.0 TDI, VW Passat CC (357) 2.0 TDI 4motion, VW Passat NMS (A32, A33) 2.0 TDI, VW CC (358) 2.0 TDI 4motion, (+ 5)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW PASSAT B7
SALOON. TOOLS YOU MIGHT NEED:



- All-purpose cleaning spray
- Torque wrench
- Torx bit T15
- Ratchet wrench
- Flat screwdriver
- Hand-operated fluid syringe
- Fender cover

BUY TOOLS


Replacement: fuel filter – VW Passat B7 saloon. Tip from AUTODOC:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – VW PASSAT B7 SALOON. USE THE FOLLOWING PROCEDURE:


1

Open the bonnet.

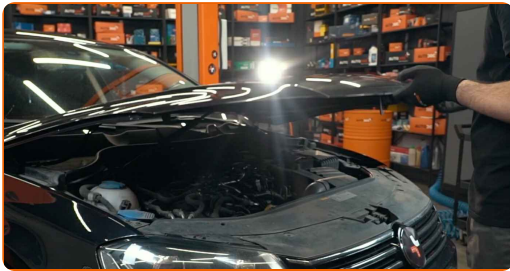


2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

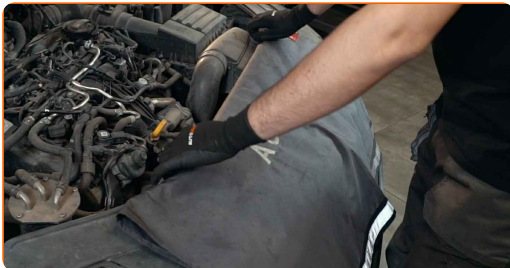

3

Clean the fuel filter housing and the cover. Use all-purpose cleaning spray.

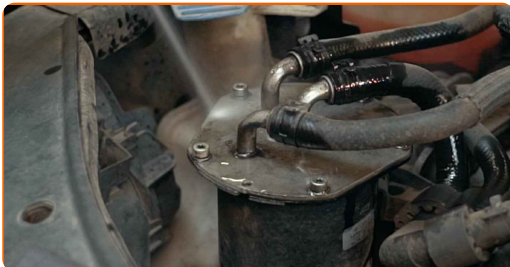

4

Unscrew the fasteners of the fuel filter housing cover. Use Torx T15. Use a ratchet wrench.




5

Remove the fuel filter housing cover. Use a flat screwdriver.



6

Remove the fuel filter. Use a flat screwdriver.

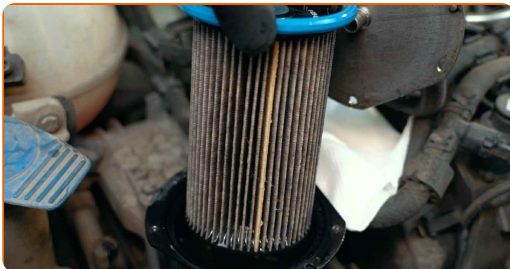


Replacement: fuel filter – VW Passat B7 saloon. AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

7

Put the old filter cartridge in the container.

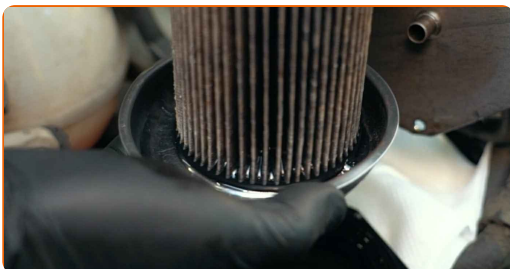

8

Pump the fuel out of the fuel filter housing. Use a hand-operated fluid syringe.




9

Clean the fuel filter housing and the cover.



10

Install a new fuel filter.

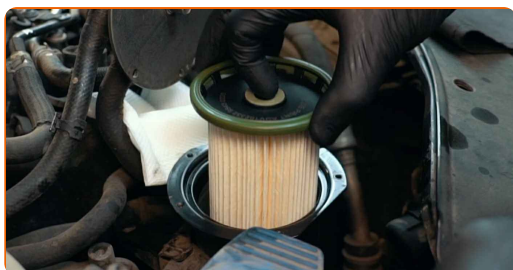


Replacement: fuel filter – VW Passat B7 saloon. Tip:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – VW Passat B7 saloon.

11

Install and tighten the cap of the fuel filter housing. Use Torx T15. Use a ratchet wrench.

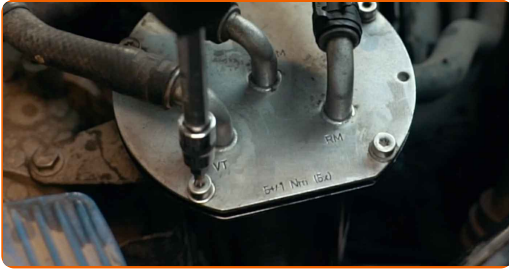

12

Tighten the fasteners of the fuel filter housing cover. Use Torx T15. Use a torque wrench. Tighten it to 6 Nm torque.



13

Connect the scan and service tool and set the fuel system to operating mode. This is necessary so that the fuel system fills completely with fuel.



14


Switch on the ignition.

15

Disconnect the scan and service tool.




16 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

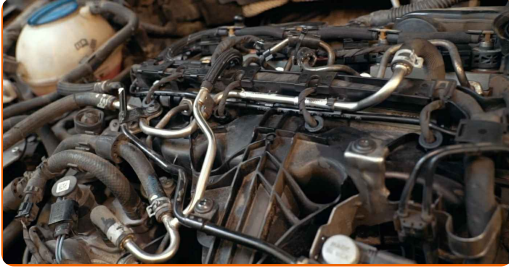

17 Shut off the engine.

18 Remove the fender protection cover.

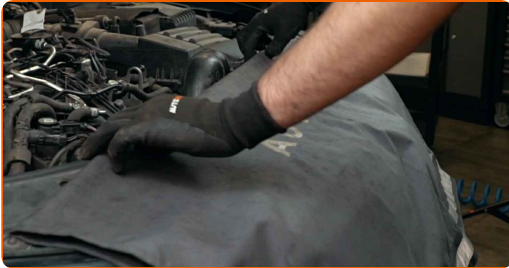

19 Close the hood.



Replacement: fuel filter – VW Passat B7 saloon. Professionals recommend:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
 **Google Play**

Download on the
 **App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW PASSAT B7 SALOON

FUEL FILTER FOR VW: BUY NOW

**FUEL FILTER FOR VW PASSAT B7 SALOON: THE BEST
DEALS & OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.