



How to change front
wheel bearing on **BMW 5**
Touring (E39) –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

BMW 5 Touring (E39) 520i 2.0, BMW 5 Touring (E39) 523i 2.5, BMW 5 Touring (E39) 540i 4.4, BMW 5 Touring (E39) 528i 2.8, BMW 5 Touring (E39) 530d 3.0, BMW 5 Touring (E39) 525tds 2.5, BMW 5 Touring (E39) 520d 2.0, BMW 5 Touring (E39) 525d 2.5, BMW 5 Touring (E39) 520i 2.2, BMW 5 Touring (E39) 525i 2.5, BMW 5 Touring (E39) 530i 3.0

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: BMW 5 Saloon (E39) 520i 2.0

REPLACEMENT: WHEEL BEARING – BMW 5 TOURING (E39). TOOLS YOU NEED:



- Wire brush
- WD-40 spray
- All-purpose cleaning spray
- Brake cleaner
- Copper grease
- Combination spanner #18
- HEX bit no.H6.
- HEX bit no.H7.
- Drive socket # 18
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Tap wrench
- Hammer
- Impact screwdriver
- Rubber mallet
- Crow bar
- Wheel chock

Buy tools

Replacement: wheel bearing – BMW 5 Touring (E39). AUTODOC experts recommend:

- Do not re-use the bearing assembly of your BMW 5 Touring (E39) car.
- The wheel hub bearing replacement procedure is identical for both wheels on the same axle.
- Warning! Shut down the engine before starting any work – BMW 5 Touring (E39).

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Secure the wheels with chocks.



2

Loosen the wheel mounting bolts. Use wheel impact socket #17.



3

Raise the front of the car and secure on supports.

4

Unscrew the wheel bolts.




Replacement: wheel bearing – BMW 5 Touring (E39). Tip:

- To avoid injury, hold up the wheel when unscrewing the bolts.


5

Remove the wheel.

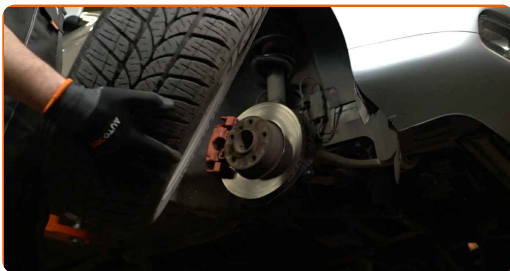


6

Remove the dust boot caps of the brake caliper guide pins. Use a crowbar.

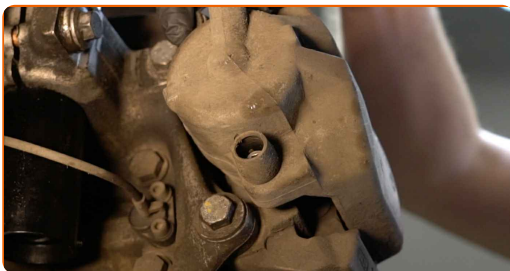


7

Unscrew the brake caliper fastening. Use HEX No.H7. Use a ratchet wrench.

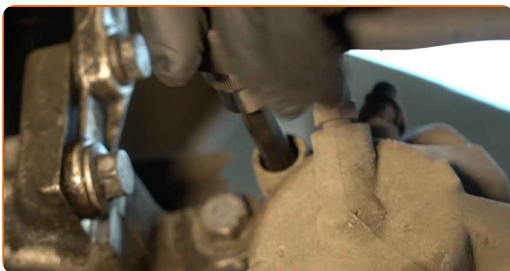

8

Spread the brake pads. Use a crowbar.

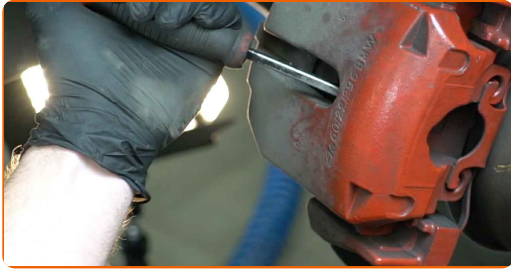

9

Detach the brake caliper retaining spring. Use a crowbar.



10

Remove the brake caliper.



Replacement: wheel bearing – BMW 5 Touring (E39). AUTODOC recommends:

- Tie the caliper to the suspension or to the body with a wire without disconnecting from the brake hose to prevent depressurization of the brake system.
- Make sure that the brake caliper is not hanging on the brake hose.
- Don't press the brake pedal after the brake caliper has been removed. As a result, the piston can fall out from the brake cylinder, and brake fluid leakage and depressurization of the system may occur.
- Check the brake caliper bracket, brake caliper guide pins and boots. Clean them. Replace, if necessary.

11

Remove the brake pads.




12


Clean the brake caliper bracket fasteners. Use a wire brush. Use WD-40 spray.




13 Unscrew the caliper bracket fastening. Use a drive socket #18. Use a tap wrench.

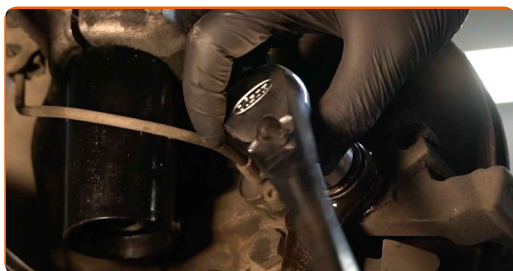


14 Remove the caliper bracket.

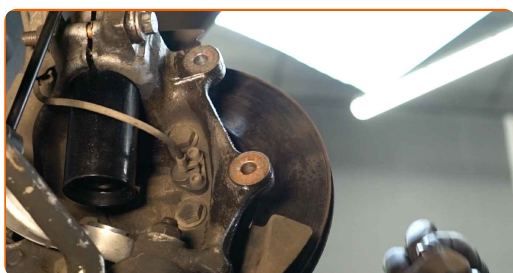

15 Clean the brake disc fasteners. Use a wire brush. Use WD-40 spray.

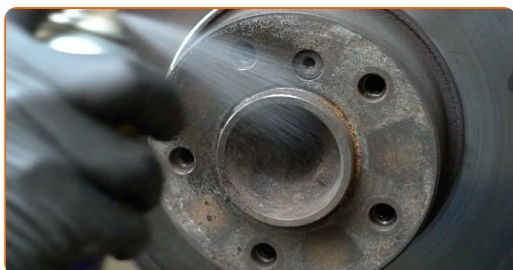

16 Unscrew the brake disc fastening. Use HEX No.H6. Use an impact screwdriver.

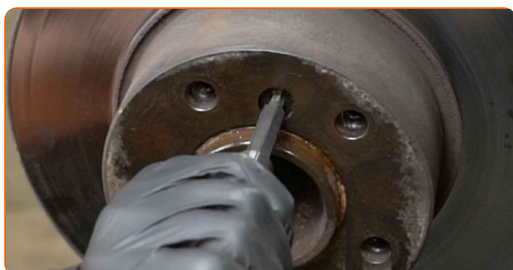


17 Remove the brake disc.



Replacement: wheel bearing – BMW 5 Touring (E39). Tip:

- If necessary, use a rubber mallet.


18 Clean the wheel hub fastener. Use a wire brush. Use WD-40 spray.

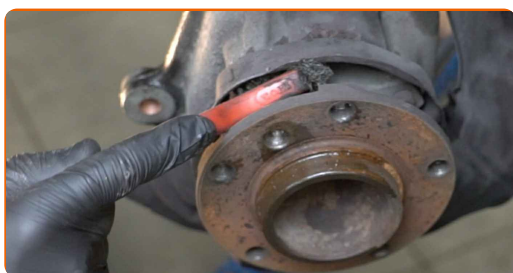

19 Unscrew the wheel hub axle nut. Use a combination spanner #18.




20 Remove the hub and the bearing together, since they are a sealed unit. Use a hammer.

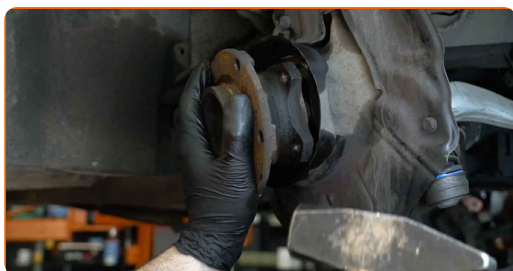


21 Clean the hub bearing mounting seat. Use a wire brush. Use all-purpose cleaning spray.



22 Install the new wheel hub with a bearing.

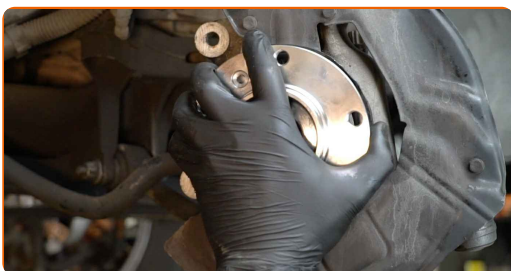

23 Tighten the hub. Use a drive socket #18. Use a torque wrench. Tighten it to 110 Nm torque.

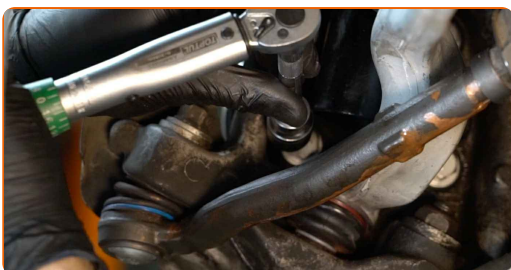

Replacement: wheel bearing – BMW 5 Touring (E39). Tip from AUTODOC:

- The wheel bearing unit must not tilt on the axle pin.

24

Treat the hub where it contacts the brake disc. Use copper grease.




25

Install the brake disc.




26

Tighten the brake disc fastening. Use HEX No.H6. Use a torque wrench. Tighten it to 16 Nm torque.

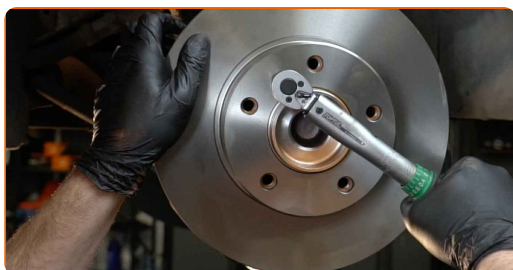

27


Clean the brake caliper bracket from dirt and dust. Use a brake cleaner.

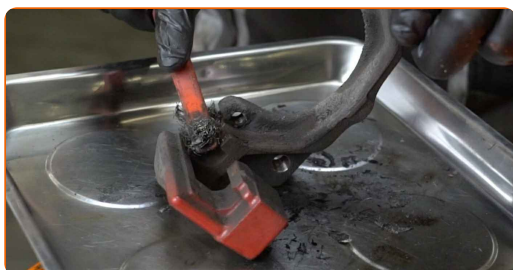


AUTODOC recommends:

- Replacement: wheel bearing – BMW 5 Touring (E39). After applying the spray, wait a few minutes.

28 Install the brake caliper bracket.

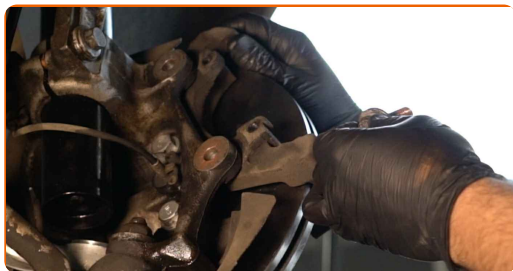


29 Tighten the brake caliper bracket. Use a drive socket #18. Use a torque wrench. Tighten it to 110 Nm torque.

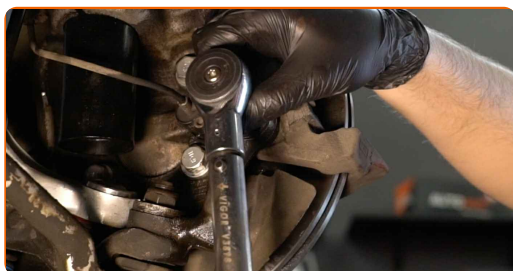


30 Install the brake pads.




31 Install the brake caliper and fix it. Use HEX No.H7. Use a torque wrench. Tighten it to 30 Nm torque.

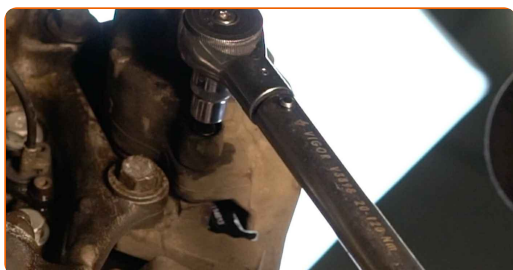


32 Install the dust boot caps of the brake caliper guide pins.

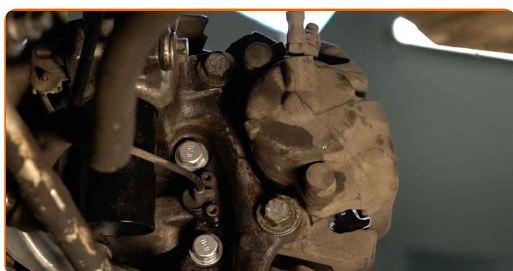


33 Install the brake caliper retaining spring.

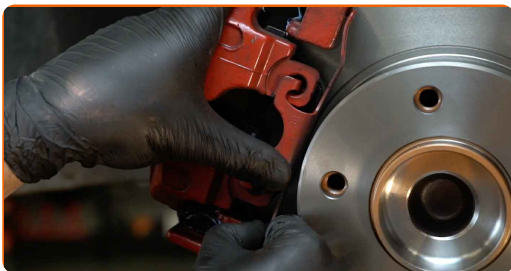

34 Treat the fasteners of the wheel hub bearing. Use copper grease.

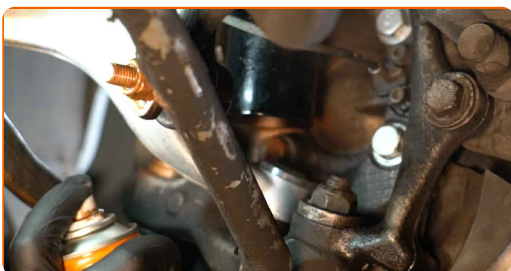

35 Treat the surface where the brake disc contacts the wheel rim. Use copper grease.

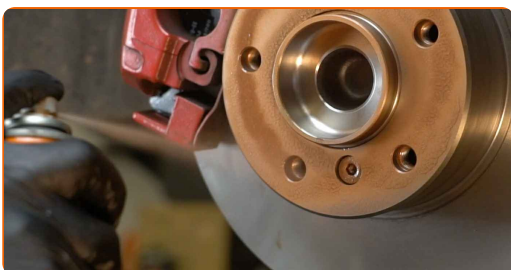

36 Clean the brake disk surface. Use a brake cleaner.



Replacement: wheel bearing – BMW 5 Touring (E39). Tip from AUTODOC:

- After applying the spray, wait a few minutes.


37 Install the wheel.



AUTODOC recommends:

- Important! Hold the wheel while screwing in the fastening bolts. BMW 5 Touring (E39)

38 Screw in the wheel bolts. Use wheel impact socket #17.

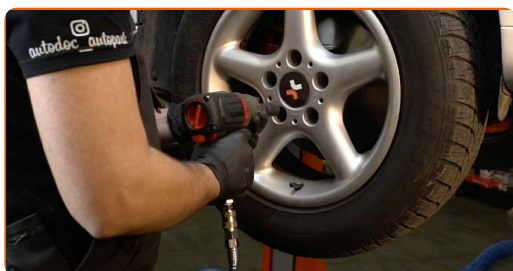

39 Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 120 Nm torque.



AUTODOC recommends:

- BMW 5 Touring (E39) – Without starting the engine, press the brake pedal several times until it feels firm.

40

Remove the jacks and chocks.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

 Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

WHEEL BEARING: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.