



How to change pollen
filter on **Opel Corsa C** –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

OPEL Corsa C Hatchback (X01) 1.0 (F08, F68), OPEL Corsa C Hatchback (X01) 1.2 (F08, F68), OPEL Corsa C Hatchback (X01) 1.8 (F08, F68), OPEL Corsa C Hatchback (X01) 1.7 DTI (F08, F68), OPEL Corsa C Hatchback (X01) 1.7 DI (F08, F68), OPEL Corsa C Hatchback (X01) 1.4 (F08, F68), OPEL Combo C Box Body / Estate 1.7 DI 16V, OPEL Corsa C Van (X01) 1.2 16V (F08, W5L), OPEL Corsa C Van (X01) 1.7 DI 16V (F08, W5L), OPEL Corsa C Van (X01) 1.7 DTI 16V (F08, W5L), OPEL Combo C Box Body / Estate 1.6, OPEL Combo C Box Body / Estate 1.7 DTI 16V, OPEL Vectra C Saloon (Z02) 2.2 16V (F69), OPEL Vectra C Saloon (Z02) 2.2 DTI 16V (F69), OPEL Vectra C Saloon (Z02) 2.0 DTI 16V (F69), (+ 67)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – OPEL CORSA C.
TOOLS YOU MIGHT NEED:



• Torx screwdriver T25

• Fender cover

[BUY TOOLS](#)


Replacement: pollen filter – Opel Corsa C. Tip from AUTODOC experts:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

REPLACEMENT: POLLEN FILTER – OPEL CORSA C. RECOMMENDED SEQUENCE OF STEPS:


1

Open the hood.

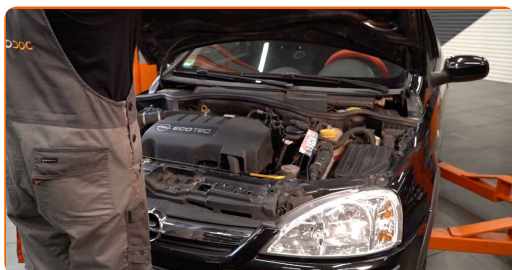

2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

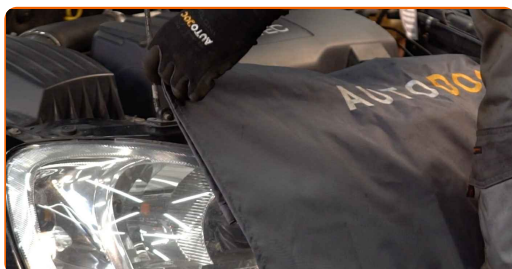

3 Unscrew the fastener of the wiper cowl grille located on the left side. Use Torx T25.




4 Remove the cowl grille seal.



5 Remove the wiper cowl grille located on the left side.



6 Clean the mounting seat of the cabin filter.

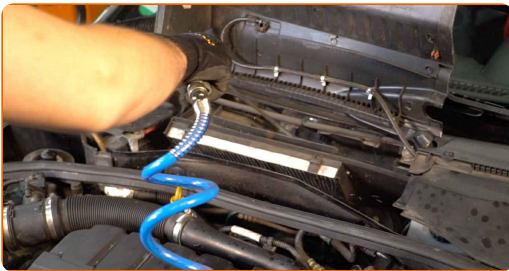

7 Take out the cabin filter bracket.

8

Remove the filter element from the filter housing.




Replacement: pollen filter – Opel Corsa C. Tip from AUTODOC:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

9

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

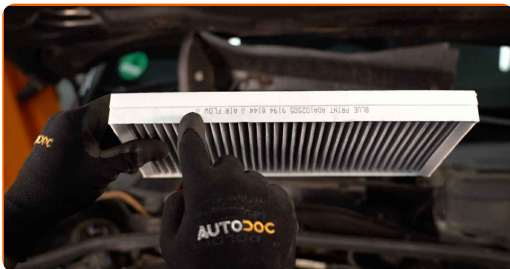

Replacement: pollen filter – Opel Corsa C. AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – Opel Corsa C.
- Follow the air flow direction arrow on the filter.

10

Install the cabin filter bracket.




11

Install the wiper cowl grille on the left side.



12

Install the cowl grille seal.

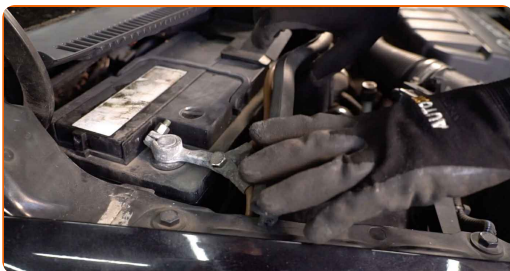


13

Screw in the fastener of the wiper cowl grille located on the left side. Use Torx T25.



14

Switch on the ignition.

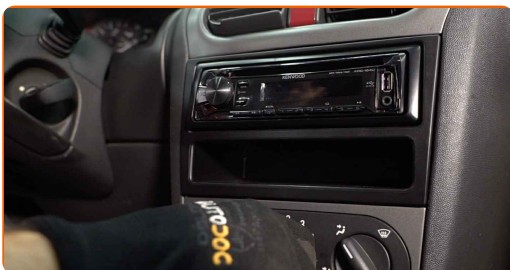

15

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



16

Switch off the ignition.



17

Remove the fender protection cover.



18

Close the hood.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC+

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR OPEL CORSA C

POLLEN FILTER FOR OPEL: BUY NOW

**POLLEN FILTER FOR OPEL CORSA C: THE BEST DEALS &
OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.