



How to change fuel filter
on **Opel Corsa C diesel** –
replacement guide

VIDEO TUTORIAL


** Important!**

This replacement procedure can be used for:

OPEL ASTRA H Box (L70) 1.9 CDTI (L70), OPEL ASTRA H Box (L70) 1.9 CDTI 16V (L70), OPEL ASTRA H Box (L70) 1.3 CDTI (L70), OPEL AGILA (A) (H00) 1.3 CDTI (F68), OPEL Signum CC (Z03) 1.9 CDTI (F48), OPEL Vectra C Caravan (Z02) 1.9 CDTI (F35), OPEL Vectra C Saloon (Z02) 1.9 CDTI (F69), OPEL Vectra C CC (Z02) 1.9 CDTI (F68), OPEL Astra H Hatchback (A04) 1.9 CDTI (L48), OPEL Astra H Caravan (A04) 1.9 CDTI (L35), OPEL Astra H Hatchback (A04) 1.9 CDTI 16V (L48), OPEL Astra H Caravan (A04) 1.9 CDTI 16V (L35), OPEL Astra H GTC (A04) 1.9 CDTi 16V (L08), OPEL Astra H GTC (A04) 1.9 CDTi (L08), OPEL Tigra TwinTop (X04) 1.3 CDTI, (+ 15)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – OPEL CORSA C. LIST OF THE TOOLS YOU'LL NEED:

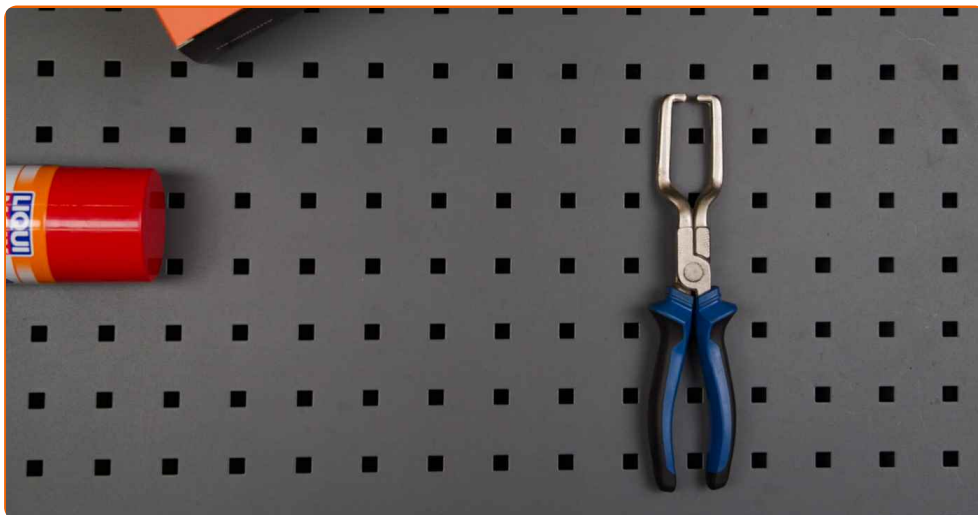

- All-purpose cleaning spray
- Fuel line pliers
- Fender cover

[BUY TOOLS](#)


Replacement: fuel filter – Opel Corsa C. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – OPEL CORSA C. TAKE THE FOLLOWING STEPS:

1

Open the bonnet.

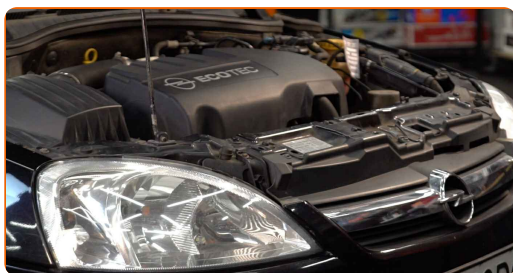


2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



3


Detach the fuel pressure sensor connector.

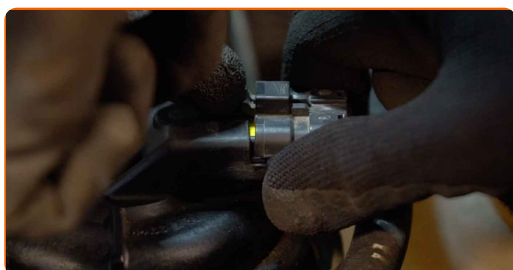

4 Clean the fuel filter. Use all-purpose cleaning spray.




5 Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use fuel line pliers.

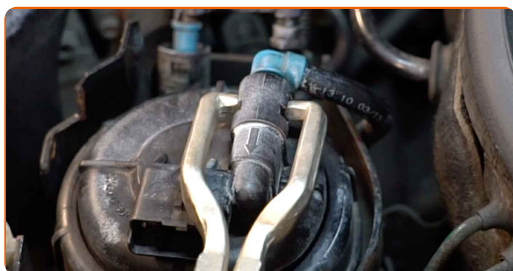


Replacement: fuel filter – Opel Corsa C. AUTODOC experts recommend:

- Be careful! Fuel may leak from the filter housing and hoses.


6 Disconnect the pipe from the fuel filter.

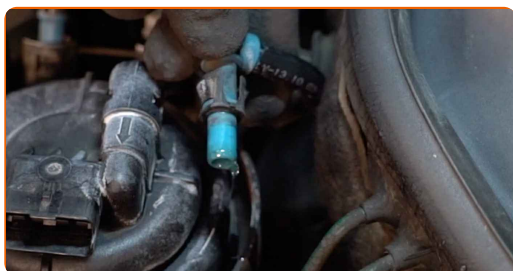

7 Unscrew the fuel filter cover.

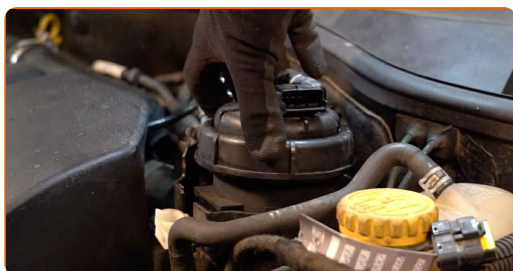

8 Unscrew the filter housing cap together with the old filter element.

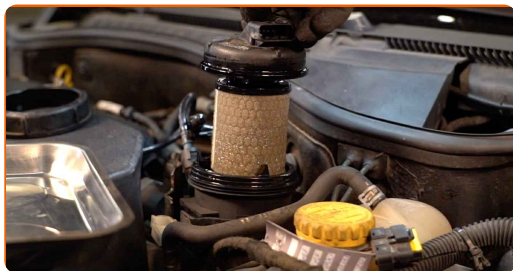


9 Put the old filter cartridge in the container.



10 Detach the old filter cartridge from the filter housing cover.



11 Insert the fuel filter in the holder so that the marks stand opposite each other.

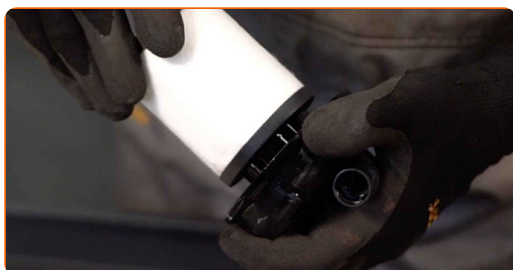


Replacement: fuel filter – Opel Corsa C. Professionals recommend:

- Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.


12

Remove the old sealing ring.

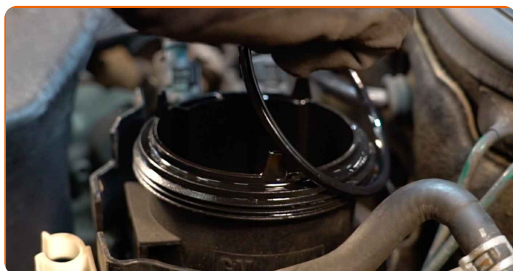


13

Install the new sealing ring.

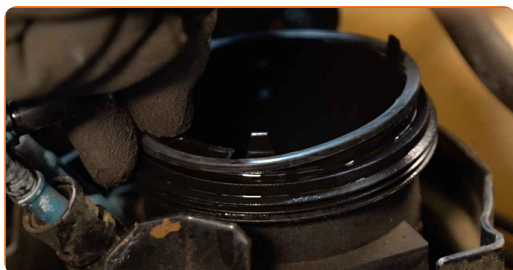


14

Install and tighten the cap of the fuel filter housing.

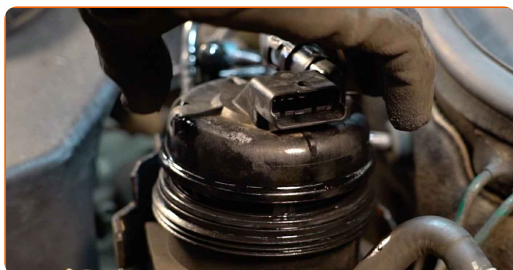

15 Connect the fuel lines to the fuel filter and lock the fastening clips.

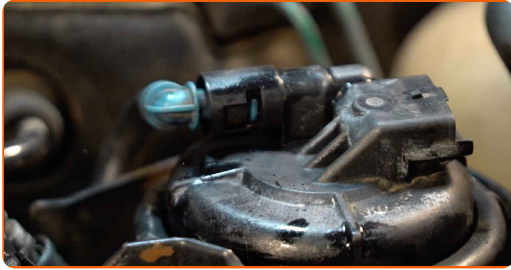

16 Attach the fuel pressure sensor connector.



17 Attach the pipe to the fuel filter.


18 Clean the fuel filter housing and the cover. Use all-purpose cleaning spray.



Replacement: fuel filter – Opel Corsa C. Tip from AUTODOC:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.


19 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

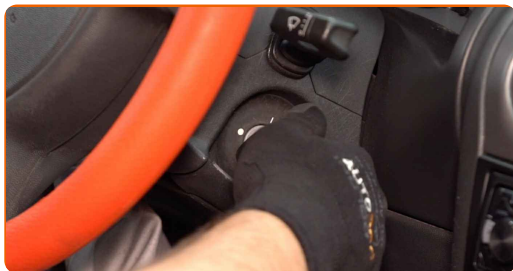

20 Shut off the engine.



21 Remove the fender protection cover.

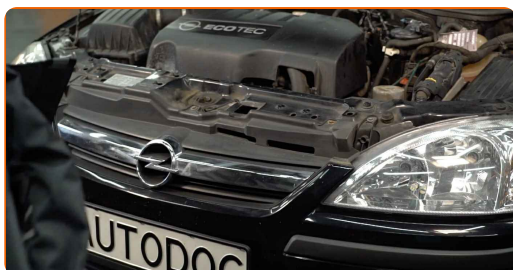

22 Close the hood.

Replacement: fuel filter – Opel Corsa C. AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR OPEL CORSA C

FUEL FILTER FOR OPEL: BUY NOW

FUEL FILTER FOR OPEL CORSA C: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.