



How to change fuel filter
on **Opel Corsa C petrol** –
replacement guide

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

OPEL Corsa B Hatchback (S93) 1.2 i (X 12 SZ, C 12 NZ), OPEL Corsa B Hatchback (S93) 1.4 i (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.4 Si (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 GSI 16V (F08, F68, M68), OPEL Omega B Saloon (V94) 2.0 (F69, M69, P69), OPEL Omega B Saloon (V94) 2.0 16V (F69, M69, P69), OPEL Omega B Saloon (V94) 2.5 V6 (F69, M69, P69), OPEL Omega B Saloon (V94) 3.0 V6 (F69, M69, P69), OPEL Omega B Caravan (V94) 2.0 (F35, M35, P35), OPEL Omega B Caravan (V94) 2.0 16V (F35, M35, P35), OPEL Omega B Caravan (V94) 2.5 V6 (F35, M35, P35), OPEL Omega B Caravan (V94) 3.0 V6 (F35, M35, P35), OPEL Corsa B Hatchback (S93) 1.4 i 16V (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 i 16V (F08, F68, M68), OPEL COMBO (71_) 1.2, (+ 184)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – OPEL CORSA C. LIST OF THE TOOLS YOU'LL NEED:



• Phillips screwdriver

• Fuel line pliers


BUY TOOLS

Replacement: fuel filter – Opel Corsa C. Tip from AUTODOC:


- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – Opel Corsa C – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1 Lift the car using a jack or place it over an inspection pit.

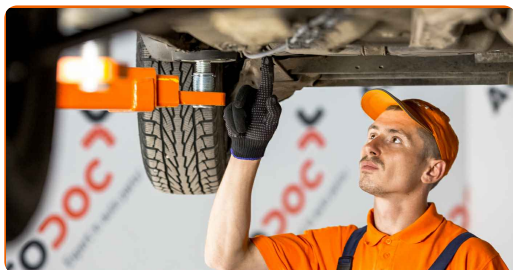

2 Loosen the filter fastenings. Use a Phillips screwdriver.

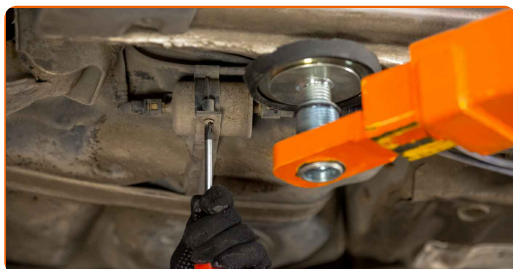

3 Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use fuel line pliers.

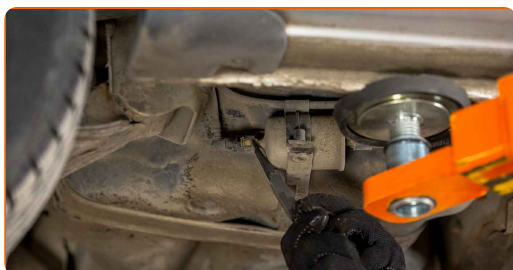

Replacement: fuel filter – Opel Corsa C. Tip from AUTODOC:

- Be careful! Fuel may leak from the filter housing and hoses.

4

Remove the fuel filter.



5


Install a new fuel filter.



Replacement: fuel filter – Opel Corsa C. Tip:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Opel Corsa C – It's important to only use high-quality filters.

6 Connect the fuel supply lines to the fuel filter.

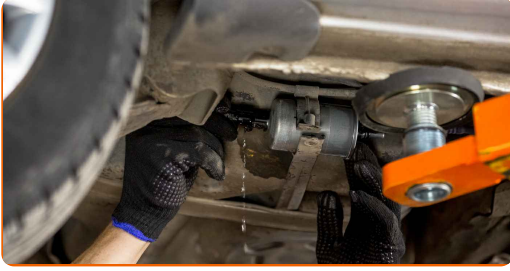

7 Tighten the fuel filter fasteners. Use a Phillips screwdriver.




8 Lower the car.



Replacement: fuel filter – Opel Corsa C. Professionals recommend:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

- 9 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

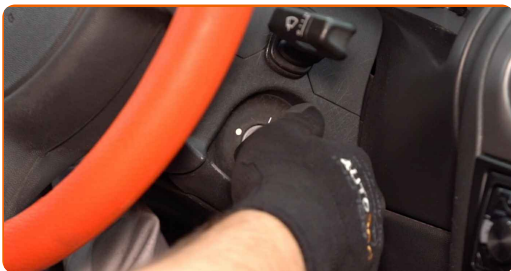

- 10 Shut off the engine.

Replacement: fuel filter – Opel Corsa C. AUTODOC experts recommend:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR OPEL CORSA C

FUEL FILTER FOR OPEL: BUY NOW

FUEL FILTER FOR OPEL CORSA C: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.