



How to change fuel filter  
on **Opel Corsa D** –  
replacement guide

## VIDEO TUTORIAL



### Important!


This replacement procedure can be used for:

OPEL Corsa D Hatchback (S07) 1.3 CDTI (L08, L68), OPEL Corsa D Hatchback (S07) 1.7 CDTI (L08, L68), OPEL Corsa E Hatchback (X15) 1.3 CDTI (08, 68)

---

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – OPEL CORSA D. TOOLS YOU'LL NEED:

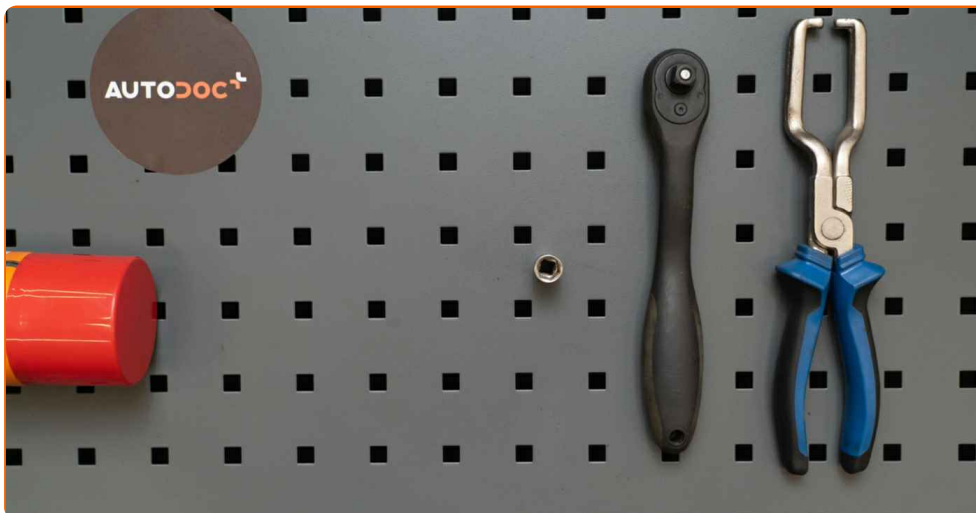

- All-purpose cleaning spray
- Drive socket # 10
- Ratchet wrench
- Fuel line pliers
- Fender cover

**BUY TOOLS**

Replacement: fuel filter – Opel Corsa D. Tip from AUTODOC experts:


- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – Opel Corsa D – should be done with the engine switched off.

**CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:**


**1** Open the hood.




**2** Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

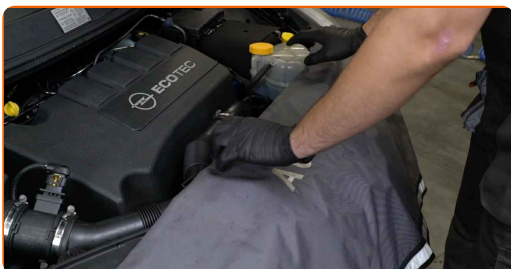


**3** Unscrew the fuel filter bracket. Use a drive socket #10. Use a ratchet wrench.

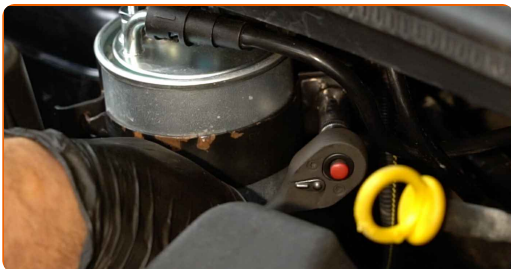

4 Remove the fastening bolt.

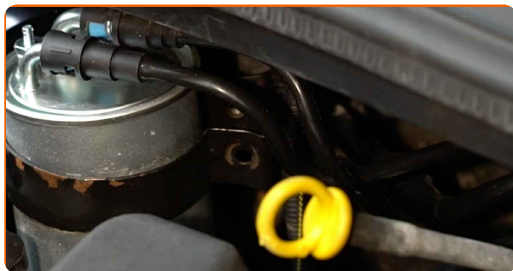

5 Remove the fuel filter.

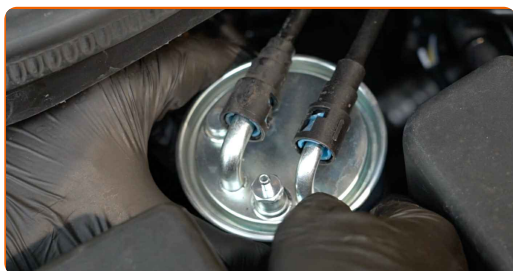

6 Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.




7 Disconnect the fuel supply lines from the fuel filter. Use fuel line pliers.



Replacement: fuel filter – Opel Corsa D. AUTODOC experts recommend:

- Be careful! Fuel may leak from the filter housing and hoses.

**8** Detach the fuel pressure sensor connector.

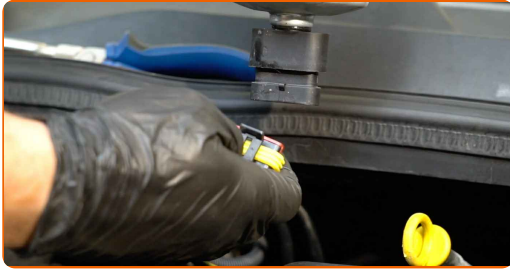

**9** Put the old filter cartridge in the container.



**10** Remove the fuel pressure sensor.



**Replacement: fuel filter – Opel Corsa D. Tip from AUTODOC experts:**

- Be careful! Fuel may leak from the filter housing and hoses.


**11** Install the fuel pressure sensor.




**12** Attach the fuel pressure sensor connector.




**13** Connect the fuel supply lines to the fuel filter.

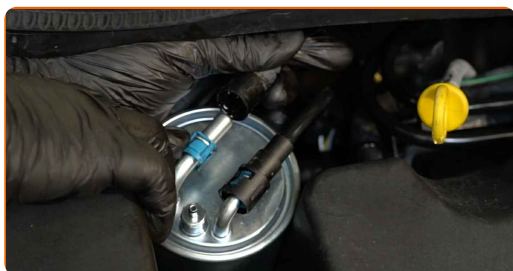


**14** Install a new fuel filter.

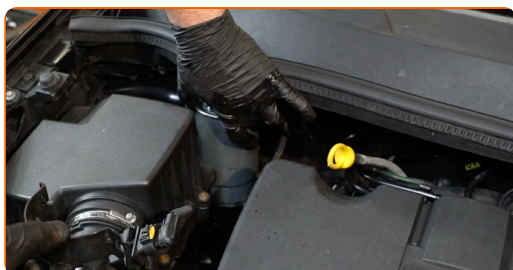

**15** Install the fastening bolt.

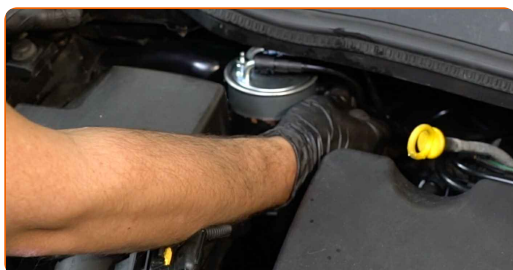

**16** Screw in the fuel filter mounting bracket. Use a drive socket #10. Use a ratchet wrench.

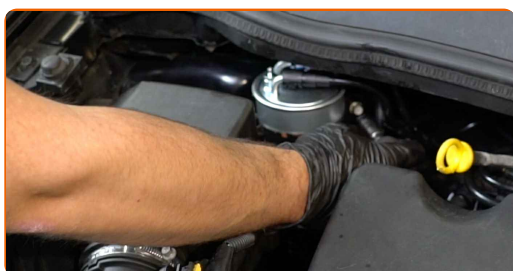




**17** Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.




**18** Shut off the engine.

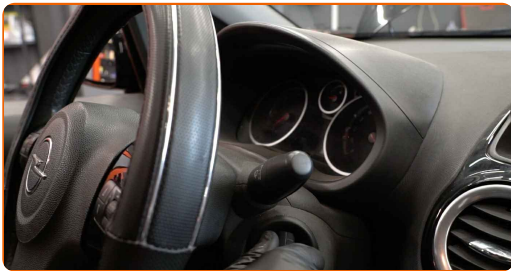

**19** Remove the fender protection cover.



**20** Close the hood.

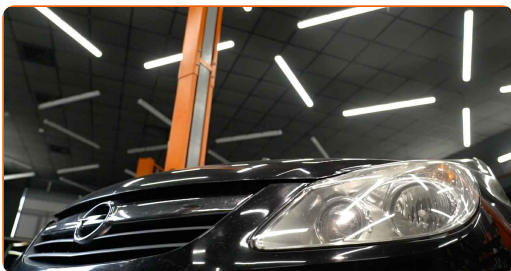



Replacement: fuel filter – Opel Corsa D. AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

**WELL DONE!** 

[VIEW MORE TUTORIALS](#)

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR OPEL**

**FUEL FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR OPEL CORSA D**

**FUEL FILTER FOR OPEL: BUY NOW**

**FUEL FILTER FOR OPEL CORSA D: THE BEST DEALS &  
OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.