



How to change pollen
filter on **Ford Focus**
DAW – replacement
guide

VIDEO TUTORIAL




i Important!

This replacement procedure can be used for:

FORD FOCUS (DAW, DBW) 1.4 16V, FORD FOCUS (DAW, DBW) 1.6 16V, FORD FOCUS (DAW, DBW) 1.8 16V, FORD FOCUS Saloon (DFW) 1.4 16V, FORD FOCUS Saloon (DFW) 1.6 16V, FORD FOCUS Saloon (DFW) 1.8 16V, FORD FOCUS Estate (DNW) 1.4 16V, FORD FOCUS Estate (DNW) 1.6 16V, FORD FOCUS Estate (DNW) 1.8 16V, FORD FOCUS (DAW, DBW) 2.0 16V, FORD FOCUS (DAW, DBW) 1.8 Turbo DI / TDDi, FORD FOCUS Saloon (DFW) 2.0 16V, FORD FOCUS Saloon (DFW) 1.8 Turbo DI / TDDi, FORD FOCUS Estate (DNW) 2.0 16V, FORD FOCUS Estate (DNW) 1.8 Turbo DI / TDDi, (+ 19)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – FORD FOCUS DAW.
TOOLS YOU MIGHT NEED:

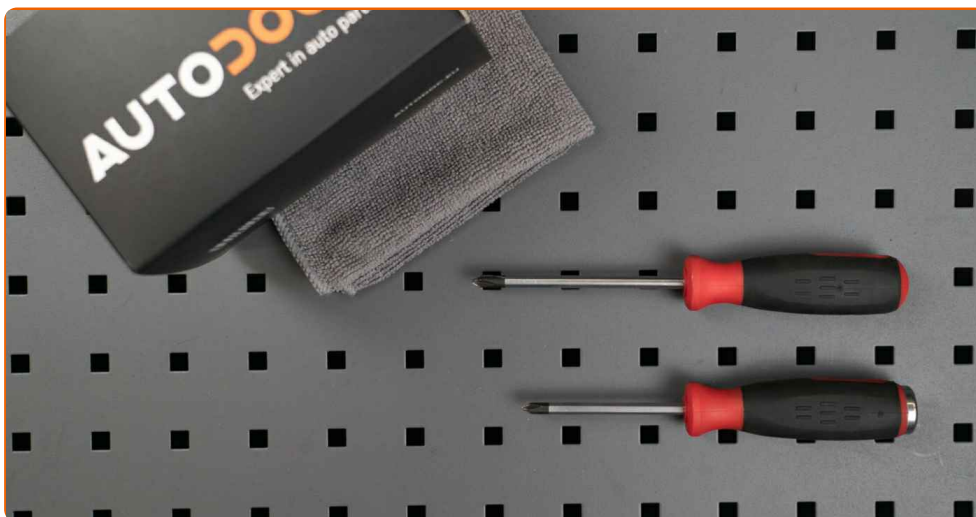

- Phillips Screwdriver
- Microfibre towel
- Fender cover

BUY TOOLS


Replacement: pollen filter – Ford Focus DAW. AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – Ford Focus DAW – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the bonnet.

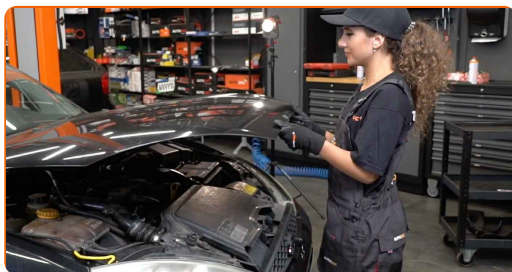


2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

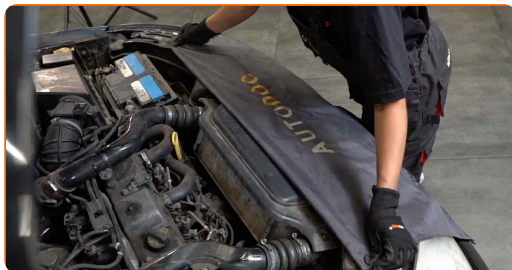

3

Unscrew the fastener of the wiper cowl grille located on the right side. Use a Phillips screwdriver.

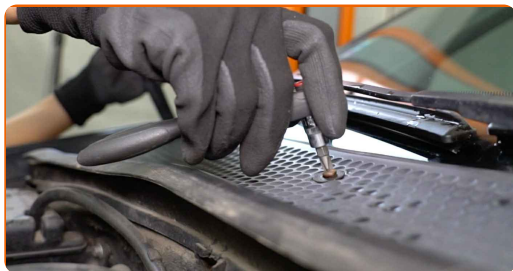

4

Remove the wiper cowl grille located on the right side.



5

Remove the cabin filter.



Replacement: pollen filter – Ford Focus DAW. Tip:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6

Switch on the ignition.

7

Close the heater flap.




8

Switch off the ignition.

9

Clean the cabin filter housing and cover.

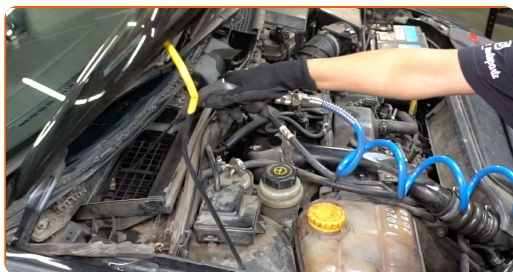


Replacement: pollen filter – Ford Focus DAW. Professionals recommend:

- Remove any debris from the cabin filter housing carefully to prevent contamination of the ventilation duct.

10

Install the cabin filter to its mounting seat.

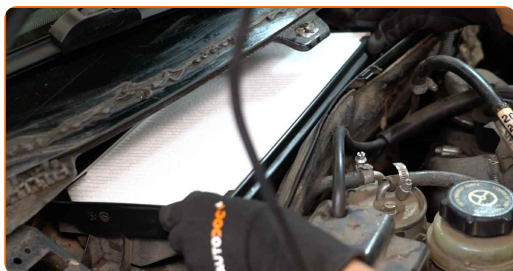


Replacement: pollen filter – Ford Focus DAW. AUTODOC experts recommend:

- Follow the air flow direction arrow on the filter.
- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – Ford Focus DAW.


11

Install and secure the wiper cowl grille located on the right side.

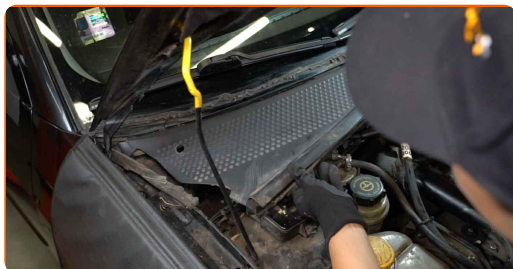

12

Screw in the fasteners of wiper cowl grille located on the right side. Use a Phillips screwdriver.

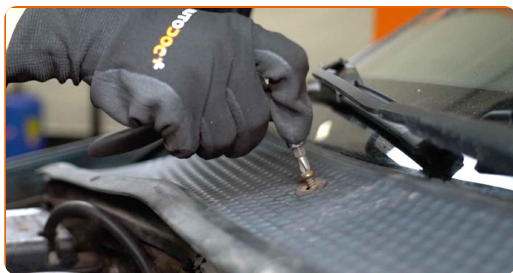

13


Switch on the ignition. The heater flap will automatically return to its normal position.

- 14 Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.




- 15 Switch off the ignition.

- 16 Remove the fender protection cover.

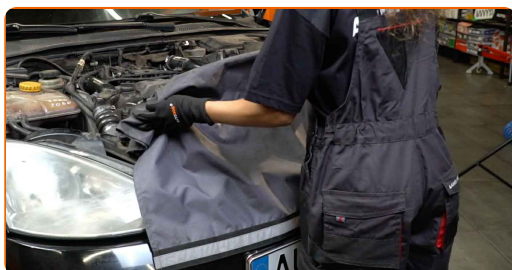

- 17 Close the hood.

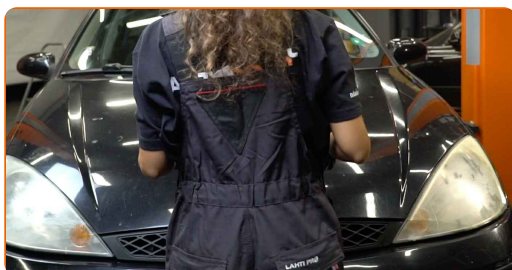

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR FORD

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR FORD FOCUS DAW

POLLEN FILTER FOR FORD: BUY NOW

**POLLEN FILTER FOR FORD FOCUS DAW: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.