



How to change fuel filter
on **FORD Focus II Estate**
(DA_, FFS, DS) –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:
FORD Focus II Estate (DA_, FFS, DS) 1.6 TDCi

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: FORD Focus II Saloon (DB_, FCH, DH) 1.6 TDCi

**REPLACEMENT: FUEL FILTER – FORD FOCUS II ESTATE
(DA_, FFS, DS). TOOLS YOU NEED:**



- All-purpose cleaning spray
- Electronic spray
- Torque wrench
- Drive socket # 10
- Drive socket # E11
- Ratchet wrench
- Flat Screwdriver
- Bulb hand fuel pump
- Fender cover

Buy tools

Replacement: fuel filter – FORD Focus II Estate (DA_, FFS, DS). AUTODOC recommends:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – FORD Focus II Estate (DA_, FFS, DS) – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the hood.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Remove the engine cover.




AUTODOC recommends:

- Replacement: fuel filter – FORD Focus II Estate (DA_, FFS, DS). Do not use excessive force when removing the part as this may damage it.


4

Unscrew the fuel filter bracket fixing bolts. Use a drive socket #10. Use a ratchet wrench.

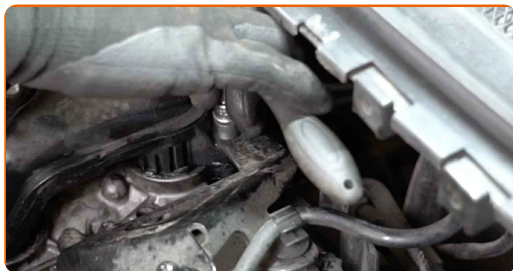


5

Remove the fuel filter fastening bracket.

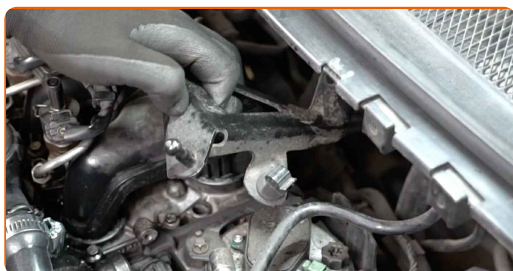

6

Unscrew the fuel filter bracket. Use a drive socket #E11. Use a ratchet wrench.

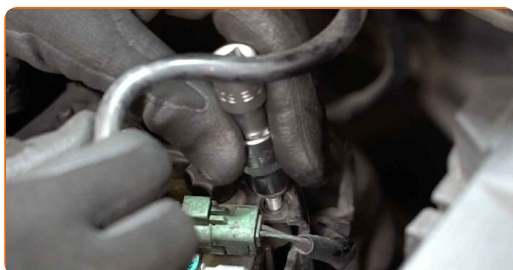

7

Detach the fuel pressure sensor connector. Use a flat screwdriver.



8

Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



9

Disconnect the fuel supply lines from the fuel filter. Use a flat screwdriver.



Replacement: fuel filter – FORD Focus II Estate (DA_, FFS, DS). Professionals recommend:

- Be careful! Fuel may leak from the filter housing and hoses.

10

Remove the fuel filter.




11 Install a new fuel filter.



Replacement: fuel filter – FORD Focus II Estate (DA_, FFS, DS). AUTODOC experts recommend:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – FORD Focus II Estate (DA_, FFS, DS).


12 Connect the fuel lines to the new fuel filter.

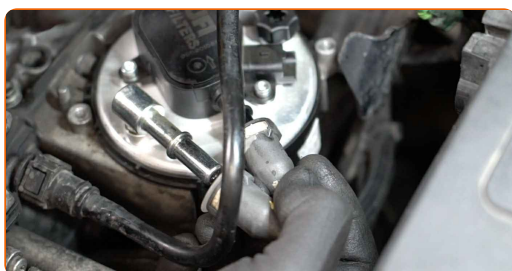


13 Tighten the fuel filter fasteners. Use a drive socket #E11. Use a torque wrench. Tighten it to 8 Nm torque.




14 Clean the connector of the fuel pressure sensor. Use dielectric grease.

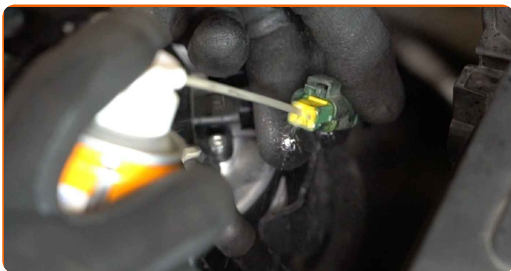


15 Attach the fuel pressure sensor connector.

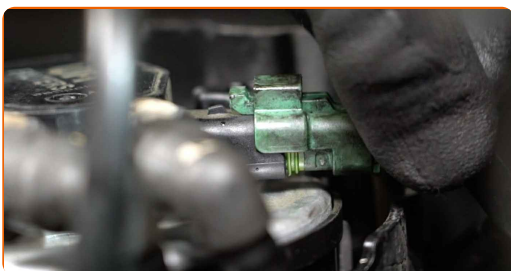


16 Install the fuel filter fastening bracket.

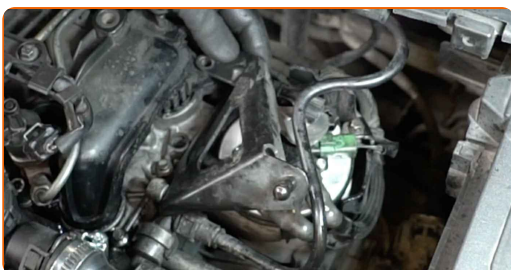

17 Screw the fixing bolts of the fuel filter bracket. Use a drive socket #10. Use a ratchet wrench.

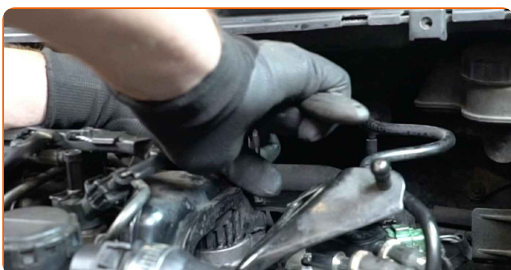


18 Remove the fuel line.

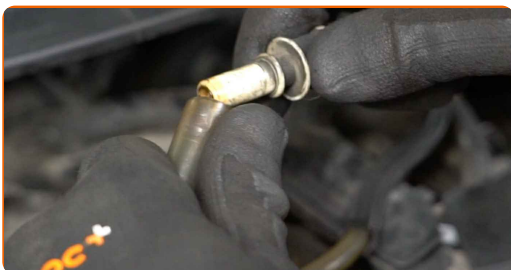


19

Press the fuel primer pump several times until it gets hard. Use a bulb hand fuel pump.

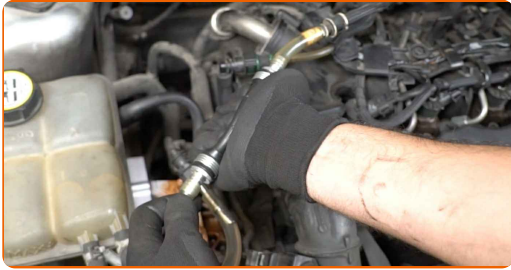

20

Install the fuel line.

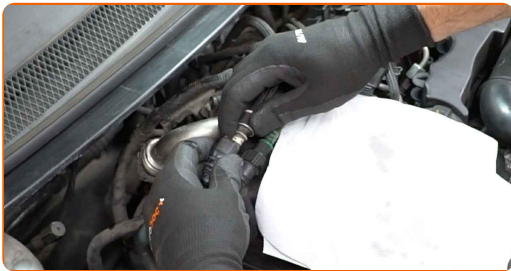

21

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

22

Shut off the engine.

23

Install the engine cover and secure it.



AUTODOC recommends:

- Replacement: fuel filter – FORD Focus II Estate (DA_, FFS, DS). Do not use excessive force during installation. This may damage the part.
- Make sure the engine cover is properly seated. It should not be displaced with respect to the guiding fasteners.

24

Remove the fender protection cover.

25

Close the hood.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
 **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

FUEL FILTER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.