



How to change the fuel  
filter on the **Ford Transit**  
**Mk7 van** – replacement  
guide

## VIDEO TUTORIAL



### Important!

This replacement procedure can be used for:

FORD TRANSIT TOURNEO 2.2 TDCi, FORD TRANSIT Bus 2.4 TDCi, FORD TRANSIT MK-7 Box 2.2 TDCi, FORD TRANSIT MK-7 Box 2.4 TDCi RWD, FORD TRANSIT Bus 2.2 TDCi, FORD TRANSIT MK-7 Platform/Chassis 2.2 TDCi, FORD TRANSIT MK-7 Platform/Chassis 2.4 TDCi RWD, FORD TRANSIT Bus 2.4 TDCi 4x4, FORD TRANSIT Bus 3.2 TDCi, FORD TRANSIT MK-7 Box 3.2 TDCi RWD, FORD TRANSIT MK-7 Platform/Chassis 3.2 TDCi RWD, FORD TRANSIT MK-7 Box 2.4 TDCi 4x4, FORD TRANSIT MK-7 Platform/Chassis 2.4 TDCi 4x4

---

The steps may slightly vary depending on the car design.

**REPLACEMENT: FUEL FILTER – FORD TRANSIT MK7  
VAN. LIST OF THE TOOLS YOU'LL NEED:**



- All-purpose cleaning spray
- Electronic spray
- Fluid drain pan
- Fender cover

**BUY TOOLS**

Replacement: fuel filter – Ford Transit Mk7 van. Professionals recommend:

- Ensure adequate ventilation of the workplace. Fuel vapours are poisonous.
- To avoid fire, wait until the engine has cooled down completely before beginning work. Keep open flames or sources of sparks away from the area.
- Warning! Shut down the engine before starting any work – Ford Transit Mk7 van.

## CARRY OUT THE REPLACEMENT STEPS AS FOLLOWS:


1

Open the bonnet.




2

Use a fender protection cover to avoid damaging the paintwork and plastic parts of the car.

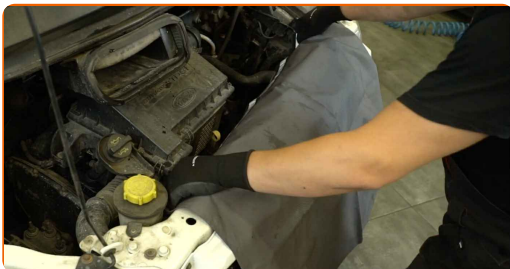


**3** Prepare a fluid drain pan.

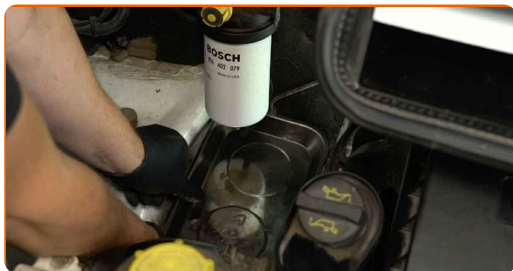


**4** Clean the filter mounting area. Use an all-purpose cleaning spray.


**5** Detach the connector of the water-in-fuel sensor.

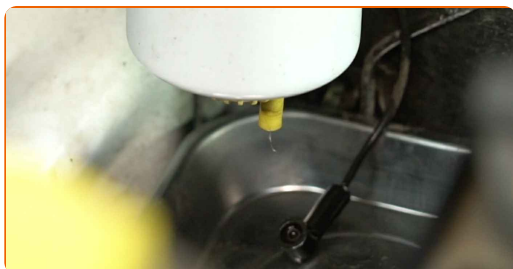

**6** Rotate the filter counterclockwise by 1/4 turn, then remove it.

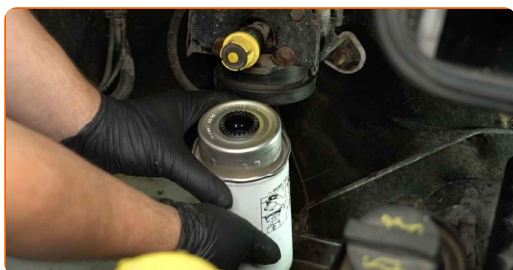

**7** Install the new filter and secure it in its mounting seat.

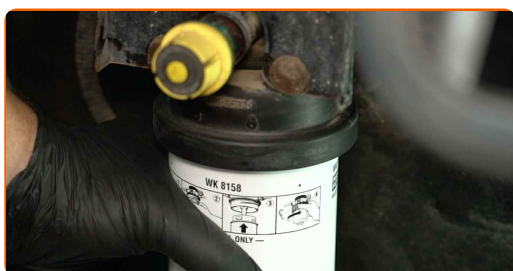


Replacement: fuel filter – Ford Transit Mk7 van. Tip from AUTODOC:

- Ensure the filter is positioned correctly before installation: the marks on the filter must align with those on the filter housing.


8

Treat the connector of the water-in-fuel sensor. Use an electronic spray.

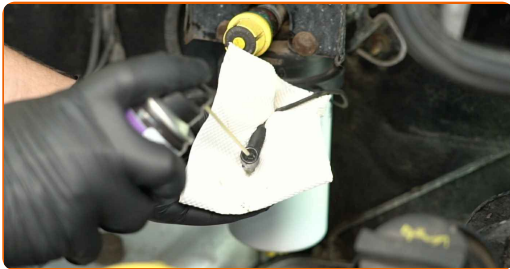


9

Attach the connector of the water-in-fuel sensor.

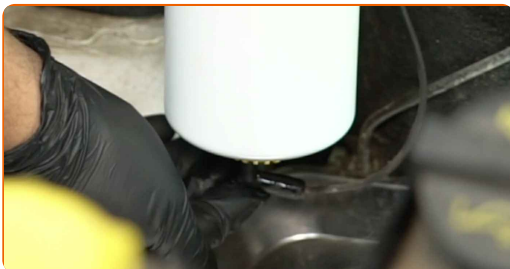

10

Remove the fluid drain pan from under the fuel filter.

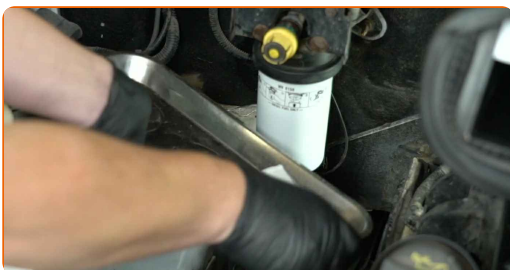

**Important!**

- After replacing the fuel filter, you may need to bleed the fuel system of air. Check your vehicle manufacturer's repair manual and follow the procedure listed there.

11

Run the engine for a few minutes. This is necessary to ensure that the component works properly.



12


Switch off the engine.

**Replacement: fuel filter – Ford Transit Mk7 van. AUTODOC experts recommend:**

- Make sure there are no fuel leaks.

13

Remove the fender cover.

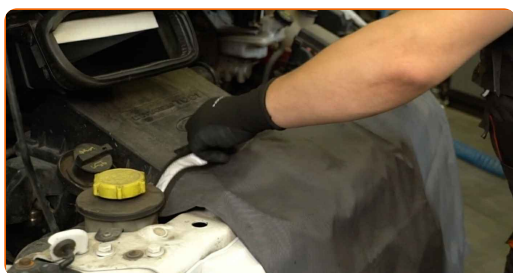

14

Close the bonnet.



### Important!

- To protect the environment from pollution, make sure to dispose of the used filters at designated collection points.

**WELL DONE!** 

[VIEW MORE TUTORIALS](#)



# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  **Google Play**

 **Download on the App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR FORD**

**FUEL FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR FORD TRANSIT MK7 VAN**

**FUEL FILTER FOR FORD: BUY NOW**

**FUEL FILTER FOR FORD TRANSIT MK7 VAN: THE BEST  
DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2024 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.