



How to change fuel filter on **VW Golf 5** – replacement guide

VIDEO TUTORIAL




i Important!

This replacement procedure can be used for:

VW Polo III Hatchback (6N1) 1.0, VW Polo III Hatchback (6N1) 1.4, VW Polo III Classic (6V2) 1.6, VW Polo III Classic (6V2) 1.4, VW Lupo / Lupo 3L (6X1, 6E1) 1.0, VW Lupo / Lupo 3L (6X1, 6E1) 1.4 16V, VW Polo III Variant (6V5) 1.4, VW Polo III Variant (6V5) 1.6, VW Polo III Hatchback (6N1) 1.6 16V GTI, VW Polo III Hatchback (6N2) 1.4 16V, VW Polo III Hatchback (6N2) 1.6 16V GTI, VW Polo III Classic (6V2) 1.4 16V, VW Polo III Variant (6V5) 1.4 16V, VW Polo III Hatchback (6N2) 1.0, VW Polo III Hatchback (6N2) 1.4, (+ 18)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW GOLF 5. TOOLS YOU NEED:

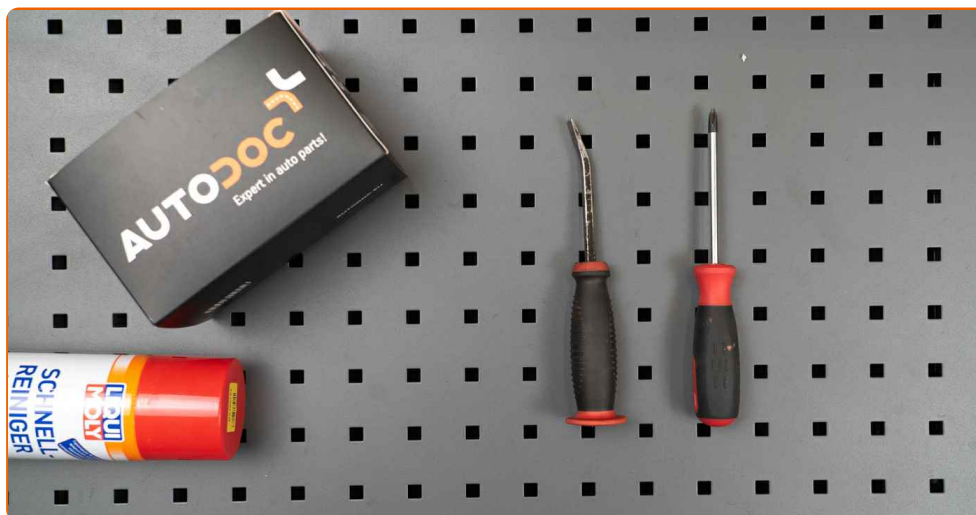

- All-purpose cleaning spray
- Fluid container
- Phillips screwdriver
- Crow bar

BUY TOOLS

Replacement: fuel filter – VW Golf 5. AUTODOC experts recommend:


- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – VW GOLF 5. USE THE FOLLOWING PROCEDURE:


1 Open the fuel door.

2 Unscrew the fuel filler cap.

3 Lift the car using a jack or place it over an inspection pit.

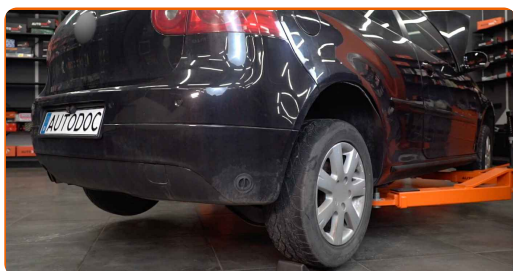


4 Prepare a container for fluids.

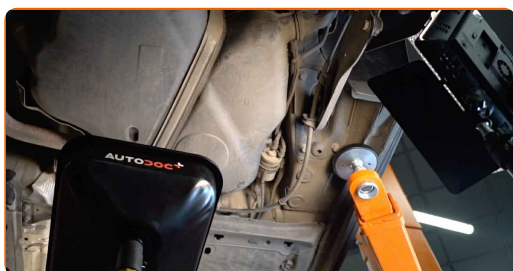


5

Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.

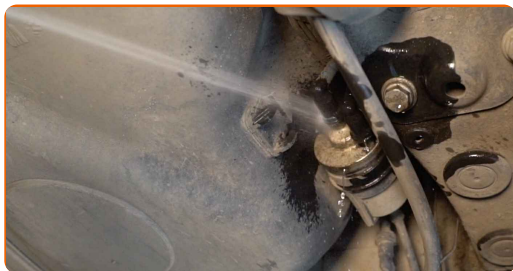

6

Disconnect the fuel supply lines from the fuel filter. Use a crowbar.

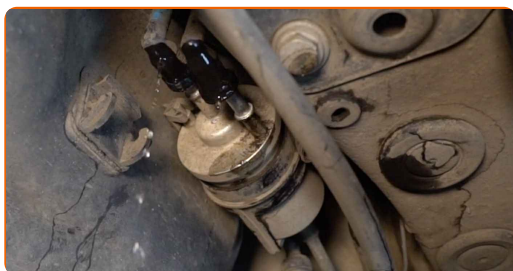


Replacement: fuel filter – VW Golf 5. Tip from AUTODOC experts:

- Be careful! Fuel may leak from the filter housing and hoses.

7

Loosen the fuel filter mounting. Use a Phillips screwdriver.

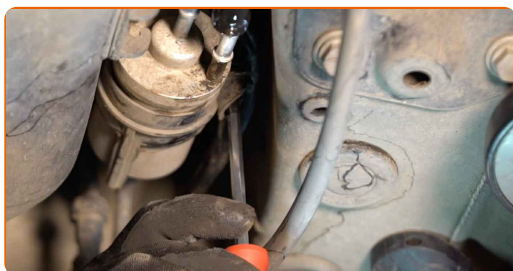


8

Clean the fuel lines. Use all-purpose cleaning spray.



9

Disconnect the fuel supply lines from the fuel filter. Use a crowbar.

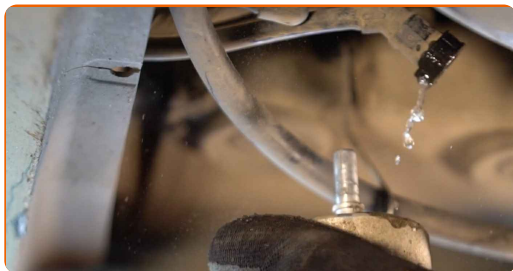


10

Remove the fuel filter. Put the old filter cartridge in the container.



11


Install a new fuel filter.

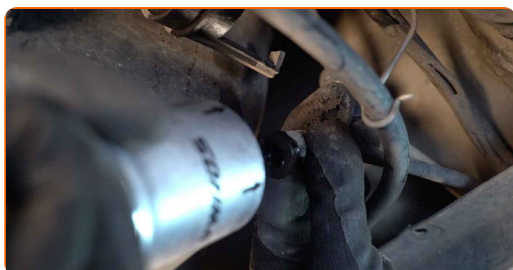


Replacement: fuel filter – VW Golf 5. AUTODOC recommends:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- VW Golf 5 – It's important to only use high-quality filters.


- 12 Connect the fuel supply lines to the fuel filter.

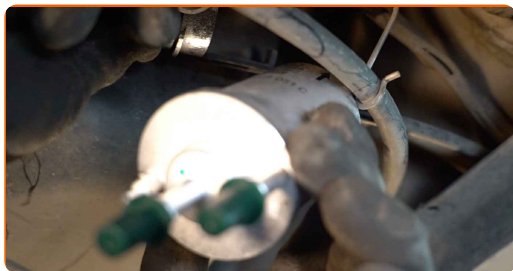

- 13 Tighten the fuel filter fasteners. Use a Phillips screwdriver.

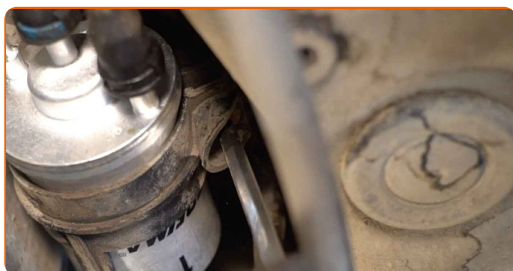

- 14 Take the fluid container away from under the fuel filter.

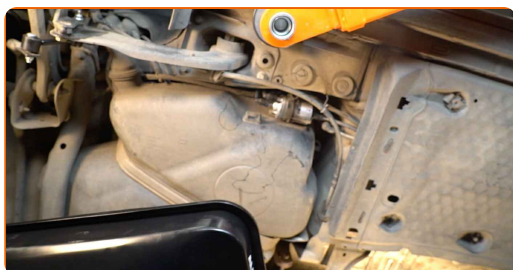

- 15 Lower the car.



- 16 Tighten the fuel filler cap.

- 17 Close the fuel door.

Replacement: fuel filter – VW Golf 5. Tip from AUTODOC experts:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

18

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



19

Shut off the engine.



Replacement: fuel filter – VW Golf 5. AUTODOC experts recommend:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 👍

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

FUEL FILTER: A WIDE SELECTION

[**CHOOSE CAR PARTS FOR VW GOLF 5**](#)[**FUEL FILTER FOR VW: BUY NOW**](#)[**FUEL FILTER FOR VW GOLF 5: THE BEST DEALS & OFFERS**](#)

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.