

How to change fuel filter on **Opel Astra H Caravan** – replacement guide





VIDEO TUTORIAL



(i) Important!


This replacement procedure can be used for:

OPEL Astra H Van (L70) 1.9 CDTI (L70), OPEL Astra H Van (L70) 1.9 CDTI 16V (L70), OPEL Astra H Van (L70) 1.3 CDTI (L70), OPEL Agila A (H00) 1.3 CDTI (F68), OPEL Corsa C Hatchback (X01) 1.3 CDTI (F08, F68), OPEL Signum CC (Z03) 1.9 CDTI (F48), OPEL Vectra C Caravan (Z02) 1.9 CDTI (F35), OPEL Vectra C Saloon (Z02) 1.9 CDTI (F69), OPEL Vectra C CC (Z02) 1.9 CDTI (F68), OPEL Astra H Hatchback (A04) 1.9 CDTI (L48), OPEL Astra H Caravan (A04) 1.9 CDTI (L35), OPEL Astra H Hatchback (A04) 1.9 CDTI 16V (L48), OPEL Astra H Caravan (A04) 1.9 CDTI 16V (L35), OPEL Astra H GTC (A04) 1.9 CDTI 16V (L08), OPEL Astra H GTC (A04) 1.9 CDTI (L08), (+ 16)

The steps may slightly vary depending on the car design.





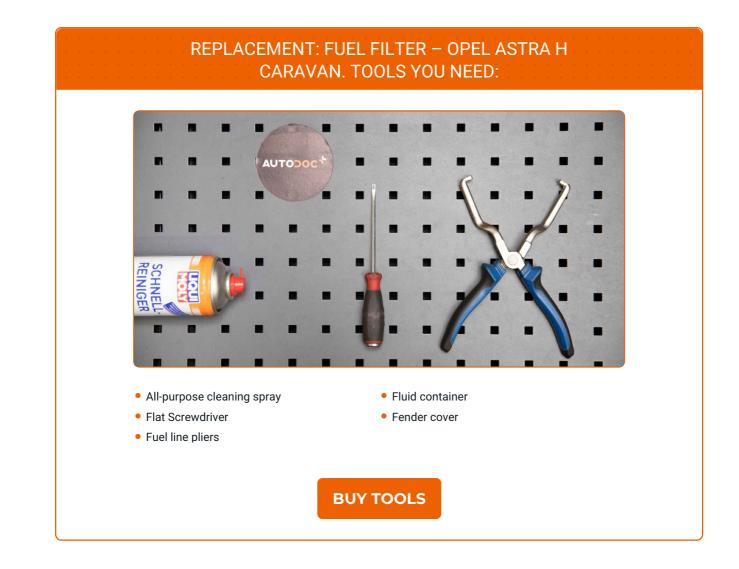





Replacement: fuel filter – Opel Astra H Caravan. Tip from AUTODOC:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Use only new O-rings during installation.
- All work should be done with the engine stopped.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:



Open the hood.



2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



3

Detach the fuel pressure sensor connector. Use a flat screwdriver.







Prepare a container for fluids.



5

Disconnect the pipe from the fuel filter. Use fuel line pliers.



Replacement: fuel filter – Opel Astra H Caravan. AUTODOC recommends:

• Be careful! Fuel may leak from the filter housing and hoses.



Unscrew the fasteners of the fuel filter housing cover.



7

Remove the fuel filter cover with the old filter cartridge attached.







Put the fuel filter cover with the old filter cartridge into a container.

9

10

8

Remove the fuel filter.

Remove the old sealing ring.





Clean the fuel filter housing and the cover. Use all-purpose cleaning spray.



Install the new sealing ring.




13

Install a new fuel filter.







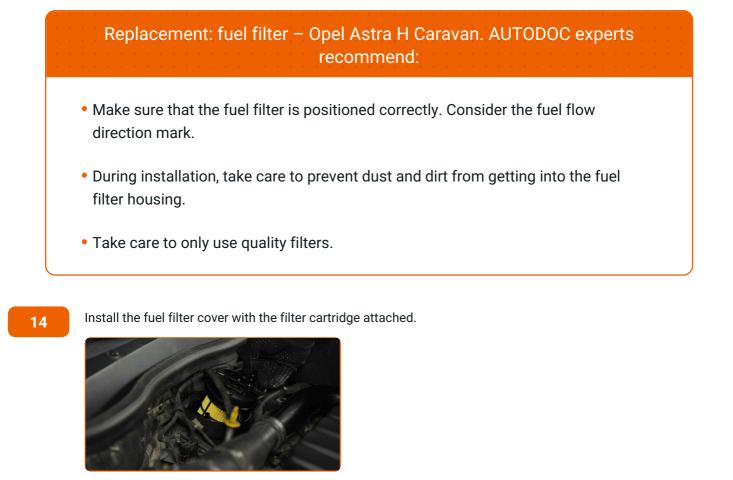

Tighten the fasteners of the fuel filter housing cover.



16

Attach the pipe to the fuel filter.







Attach the fuel pressure sensor connector.



Replacement: fuel filter – Opel Astra H Caravan. Professionals recommend:

• Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



19

18

Shut off the engine.

20

Remove the fender protection cover.







Close the hood.



Replacement: fuel filter – Opel Astra H Caravan. Tip from AUTODOC experts:

• To protect the environment from pollution, be sure to dispose of the used filters at special collection points.




VIEW MORE TUTORIALS





AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

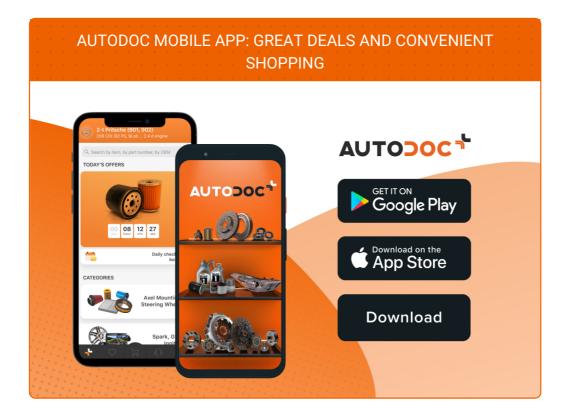

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

FUEL FILTER: A WIDE SELECTION





CHOOSE CAR PARTS FOR OPEL ASTRA H CARAVAN

FUEL FILTER FOR OPEL: BUY NOW

FUEL FILTER FOR OPEL ASTRA H CARAVAN: THE BEST DEALS & OFFERS

(i) **DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.