



How to change pollen
filter on **HONDA Civic VII**
Saloon (ES, ET) –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

HONDA Civic VII Saloon (ES, ET) 1.7, HONDA Civic VII Saloon (ES, ET) 1.3 IMA (ED9, ES9), HONDA Civic VII Saloon (ES, ET) 1.4, HONDA Civic VII Saloon (ES, ET) 1.6

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: HONDA CR-V II (RD) 2.2 CTDi (RD9)

REPLACEMENT: POLLEN FILTER – HONDA CIVIC VII
SALOON (ES, ET). LIST OF THE TOOLS YOU'LL NEED:



- Flat Screwdriver

[Buy tools](#)


Replacement: pollen filter – HONDA Civic VII Saloon (ES, ET). AUTODOC experts recommend:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – HONDA Civic VII Saloon (ES, ET) – should be done with the engine switched off.


CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Move the passenger seat fully backwards.

2 Open the glove box.

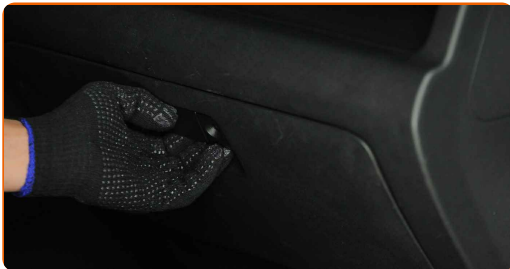

3 Detach the stopper (strap) from the glove box lid. Use a flat screwdriver.

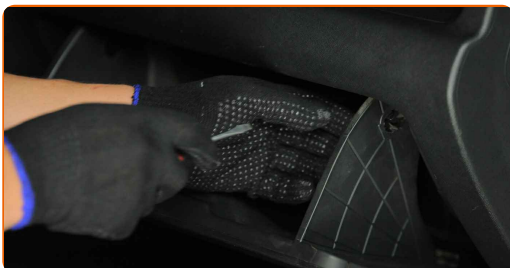

4

Remove the cabin filter housing cover.



5

Remove the cabin filters.



6

Remove the filter element from the filter housing.



Replacement: pollen filter – HONDA Civic VII Saloon (ES, ET). Tip from AUTODOC:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

7

Clean the cabin filter housing and cover.

8

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



Replacement: pollen filter – HONDA Civic VII Saloon (ES, ET). AUTODOC recommends:

- Follow the air flow direction arrow on the filter.
- Replacement: pollen filter – HONDA Civic VII Saloon (ES, ET). Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.


9

Install the cabin filters.




10

Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.

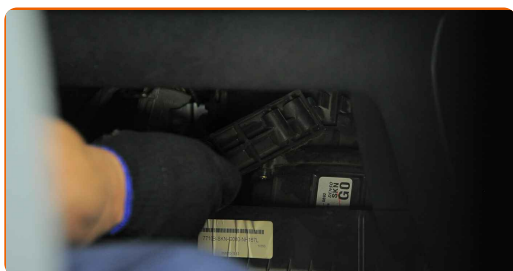

11

Attach the stopper (strap) to the glove box lid.

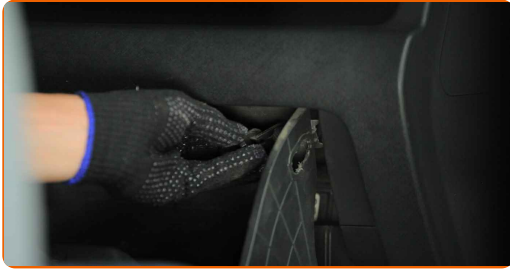

12

Close the glove box.



13

Return the passenger seat to its initial position.

14

Switch on the ignition.

15

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

16

Switch off the ignition.

WELL DONE! 👍

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC

GET IT ON
 Google Play

Download on the
 App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

POLLEN FILTER: A WIDE SELECTION

(i) DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.