



How to change fuel filter
on **VW Lupo 6X1 diesel** –
replacement guide

VIDEO TUTORIAL




ⓘ Important!

This replacement procedure can be used for:

VW Lupo / Lupo 3L (6X1, 6E1) 1.7 SDI, VW Lupo / Lupo 3L (6X1, 6E1) 1.2 TDI 3L, VW Polo III Hatchback (6N2) 1.4 TDI, VW Polo III Hatchback (6N2) 1.7 SDI, VW Polo III Hatchback (6N2) 1.9 D, VW Polo III Hatchback (6N2) 1.9 SDI, VW Polo III Van Box Body / Estate (6V5) 1.7 SDI

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW LUPO 6X1. TOOLS YOU MIGHT NEED:

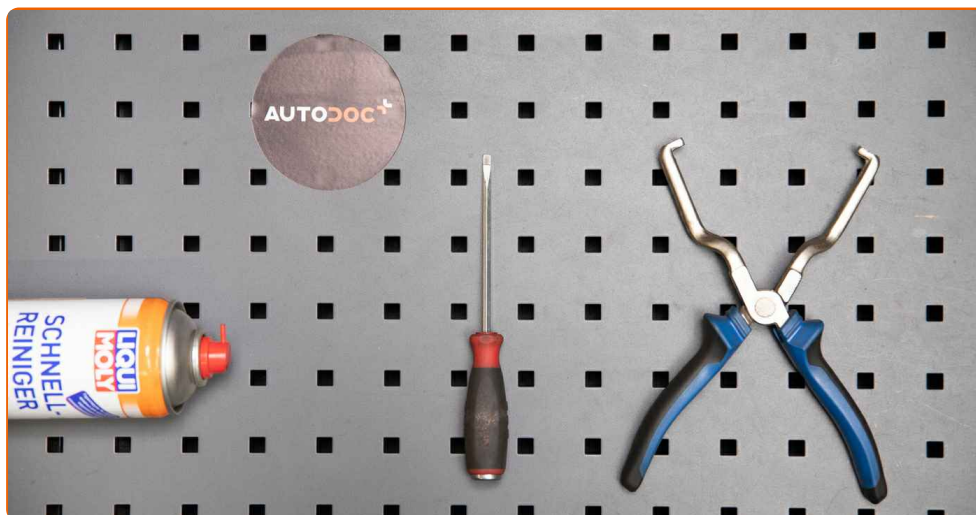

- Flat Screwdriver
- Pliers
- Round-nose pliers
- Fluid container
- Fender cover

BUY TOOLS

Replacement: fuel filter – VW Lupo 6X1. Professionals recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – VW LUPO 6X1. TAKE THE FOLLOWING STEPS:

1

Open the bonnet.



2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.


3

Prepare a container for fluids.




4

Loosen the fuel supply lines fastening to the fuel filter. Use pliers.

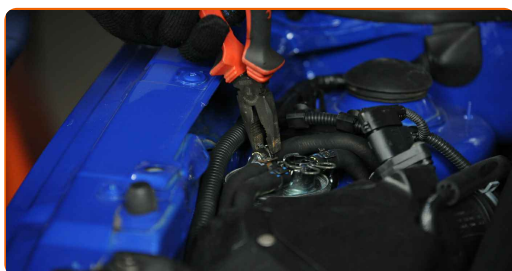

5

Disconnect the fuel supply lines from the fuel filter. Use a flat screwdriver.

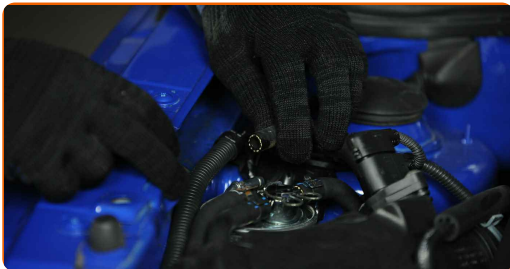


Replacement: fuel filter – VW Lupo 6X1. AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

6

Remove the spring clip that holds the fuel line in place. Use round-nose pliers.

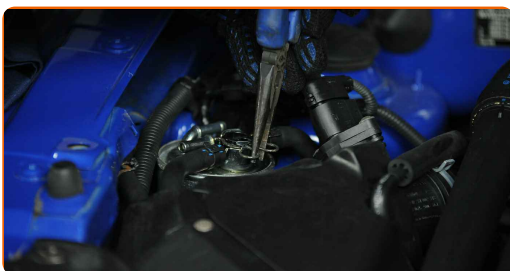

7

Disconnect the pipe from the fuel filter.

AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

8

Remove the fuel filter. Put the old filter cartridge in the container.



9

Install a new fuel filter.




Replacement: fuel filter – VW Lupo 6X1. AUTODOC experts recommend:


- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Take care to only use quality filters.

10


Attach the pipe to the fuel filter.

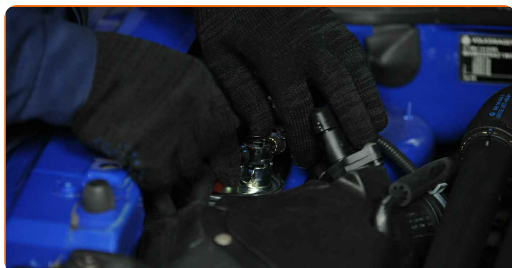


- 11 Reinstall the spring clip that holds the fuel line in place.

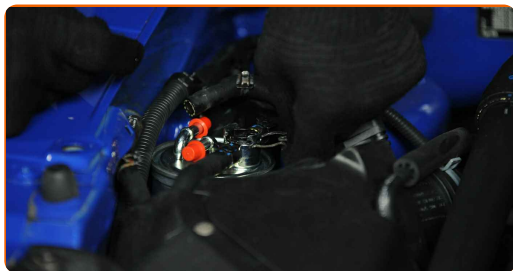

- 12 Connect the fuel supply lines to the new fuel filter.

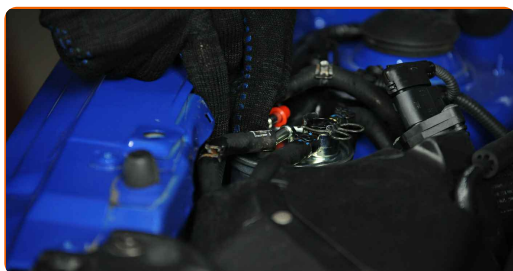

- 13 Tighten the fuel supply line fastening. Use pliers.

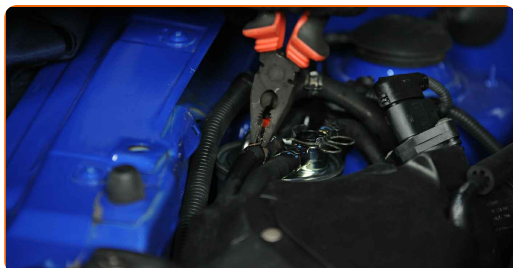

- 14 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



- 15 Shut off the engine.

- 16 Remove the fender protection cover.

17

Close the hood.



Replacement: fuel filter – VW Lupo 6X1. Tip:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

FUEL FILTER: A WIDE SELECTION

[**CHOOSE CAR PARTS FOR VW LUPO 6X1**](#)[**FUEL FILTER FOR VW: BUY NOW**](#)[**FUEL FILTER FOR VW LUPO 6X1: THE BEST DEALS & OFFERS**](#)

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AutoDoc shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AutoDoc shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AutoDoc shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AutoDoc strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by Autodoc GmbH.