



How to change fuel filter
on **VW Lupo 6X1 petrol** –
replacement guide

VIDEO TUTORIAL




ⓘ Important!

This replacement procedure can be used for:

VW Polo III Hatchback (6N1) 1.6, VW Polo III Hatchback (6N1) 1.4, VW Polo III Hatchback (6N1) 1.4 16V, VW Polo III Classic (6V2) 1.6, VW Polo III Classic (6V2) 1.4, VW Polo III Hatchback (6N1) 1.0, VW Polo III Classic (6V2) 1.8, VW Lupo / Lupo 3L (6X1, 6E1) 1.0, VW Lupo / Lupo 3L (6X1, 6E1) 1.4 16V, VW Polo III Variant (6V5) 1.4, VW Polo III Variant (6V5) 1.6, VW Polo III Hatchback (6N1) 1.6 16V GTI, VW Polo III Box Body / Hatchback (6N1) 1.0, VW Polo III Hatchback (6N2) 1.4 16V, VW Polo III Hatchback (6N2) 1.6 16V GTI, (+ 35)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW LUPO 6X1. TOOLS YOU NEED:

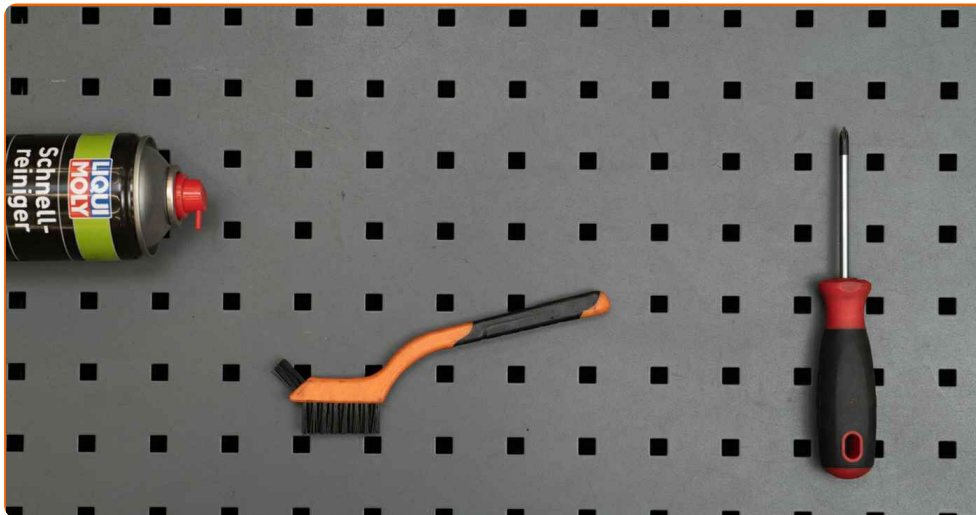

- Nylon cleaning brush
- All-purpose cleaning spray
- Phillips Screwdriver
- Fluid container

BUY TOOLS

Replacement: fuel filter – VW Lupo 6X1. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – VW Lupo 6X1 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the fuel door.




2

Unscrew the fuel filler cap.



3

Raise the car.

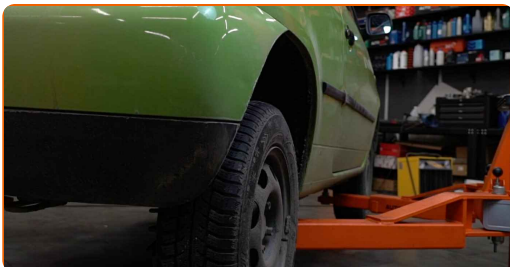


Replacement: fuel filter – VW Lupo 6X1. Professionals recommend:

- If you are using a jack, make sure it rests on a flat surface without any unevenness.
- Be sure to additionally secure the car with jack stands.


4

Prepare a container for fluids.

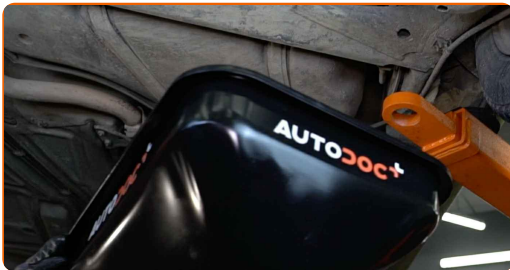


5

Clean the fasteners of the fuel supply lines. Use a nylon cleaning brush. Use all-purpose cleaning spray.

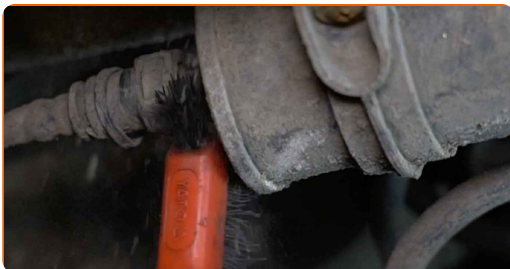

6

Squeeze the clips and detach the fuel supply lines from the fuel filter housing.

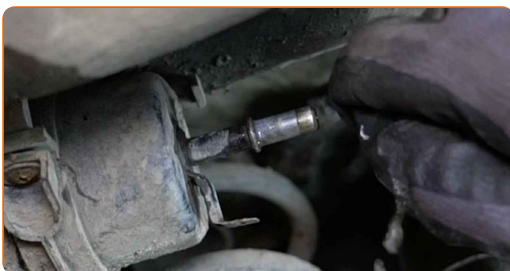


AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

7

Loosen the fuel filter fasteners. Use a Phillips screwdriver.

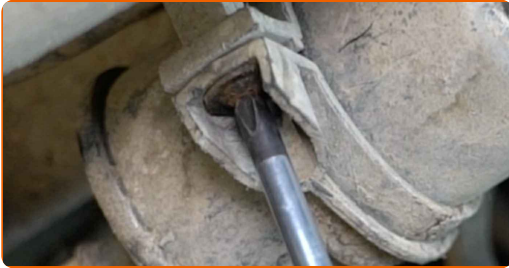


8

Remove the fuel filter.



9

Install a new fuel filter.

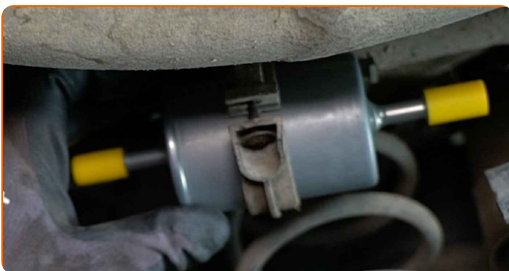


Replacement: fuel filter – VW Lupo 6X1. AUTODOC experts recommend:

- Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – VW Lupo 6X1.

10

Screw in the fuel filter mounting bracket. Use a Phillips screwdriver.

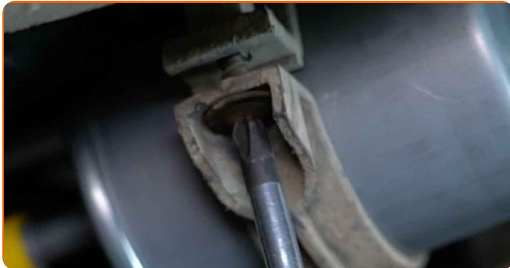

11

Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



12

Connect the fuel supply lines to the fuel filter.



- 13 Clean the fuel lines. Use all-purpose cleaning spray.




- 14 Take the fluid container away from under the fuel filter.




- 15 Lower the car.



- 16 Tighten the fuel filler cap.

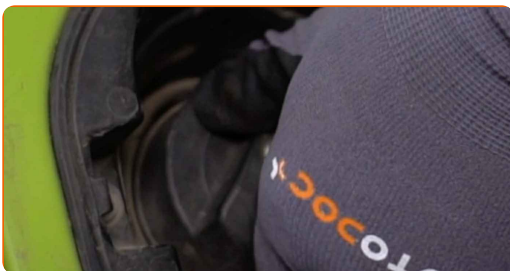

- 17 Close the fuel door.

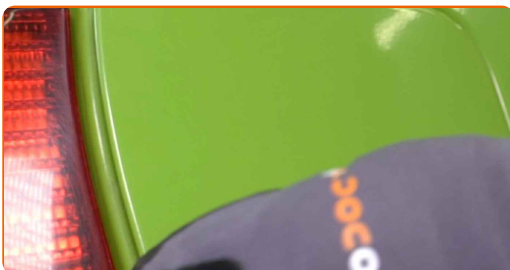

AUTODOC recommends:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

18 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

19 Shut off the engine.

Replacement: fuel filter – VW Lupo 6X1. Tip from AUTODOC experts:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE!

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC+

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW LUPO 6X1

FUEL FILTER FOR VW: BUY NOW

**FUEL FILTER FOR VW LUPO 6X1: THE BEST DEALS &
OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.