



How to change pollen
filter on **VW Lupo 6X1** –
replacement guide

VIDEO TUTORIAL




i Important!

This replacement procedure can be used for:

VW Golf III Hatchback (1H1) 1.9 D, VW Golf III Hatchback (1H1) 1.9 TD,GTD, VW Golf III Hatchback (1H1) 1.9 TDI, VW Golf III Hatchback (1H1) 1.4, VW Golf III Hatchback (1H1) 1.6, VW Golf III Hatchback (1H1) 1.8, VW Golf III Hatchback (1H1) 2.0, VW Golf III Hatchback (1H1) 2.0 GTI 16V, VW Polo III Hatchback (6N1) 1.6, VW Golf III Hatchback (1H1) 1.9 SDI, VW Golf IV Hatchback (1J1) 1.6, VW Golf IV Hatchback (1J1) 1.9 TDI, VW Golf IV Hatchback (1J1) 1.9 SDI, VW Golf IV Hatchback (1J1) 1.4 16V, VW Golf IV Hatchback (1J1) 1.8, (+ 106)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – VW LUPO 6X1. LIST
OF THE TOOLS YOU'LL NEED:

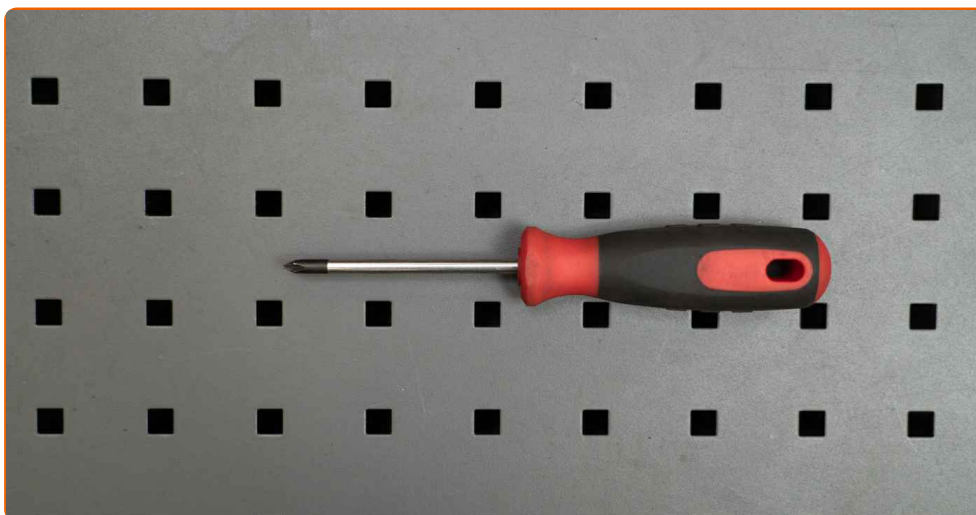

- Phillips Screwdriver

- Fender cover

BUY TOOLS


Replacement: pollen filter – VW Lupo 6X1. Tools you might need:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – VW Lupo 6X1 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the hood.

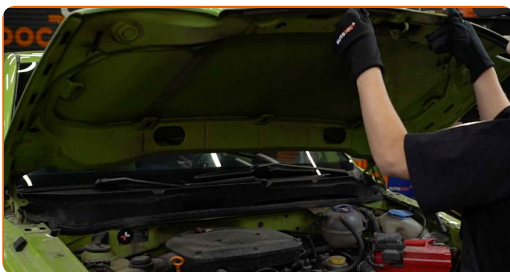


2


Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

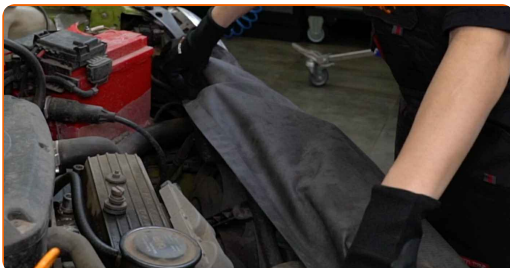


3 Remove the rubber strip.

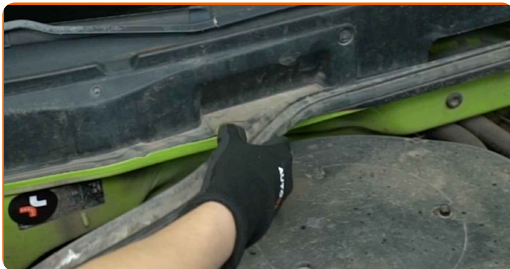


4 Unscrew the plastic panel fasteners. Use a Phillips screwdriver.

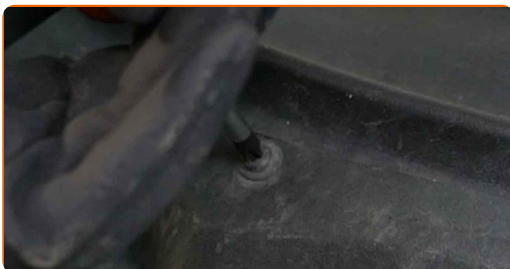


5 Remove the plastic panel.

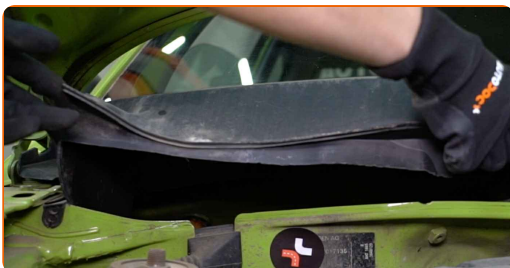

6 Press the pollen filter retaining clips to release them.

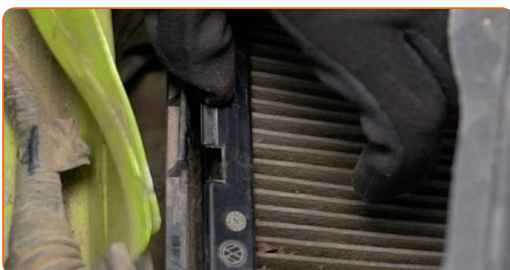

7 Remove the cabin filter.

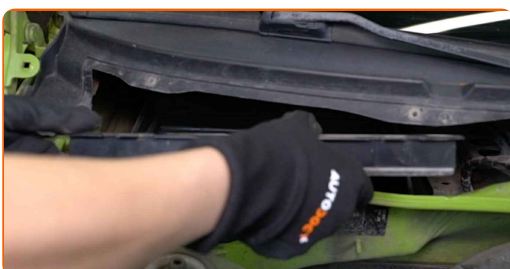

Replacement: pollen filter – VW Lupo 6X1. Tip from AUTODOC:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

8

Switch on the air recirculation mode.



9

Clean the mounting seat of the cabin filter.




10

Install a new filter element into the frame.



11

Install the cabin filter to its mounting seat.

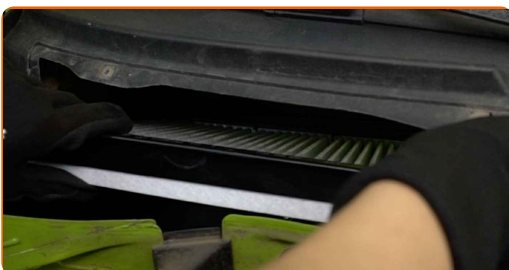

Replacement: pollen filter – VW Lupo 6X1. AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.
- Follow the air flow direction arrow on the filter.
- Attention! Use quality filters – VW Lupo 6X1.

12 Lock the pollen filter retaining clips in place.


13 Install the plastic panel.



14 Screw on the plastic panel fasteners. Use a Phillips screwdriver.



15 Install the rubber strip.

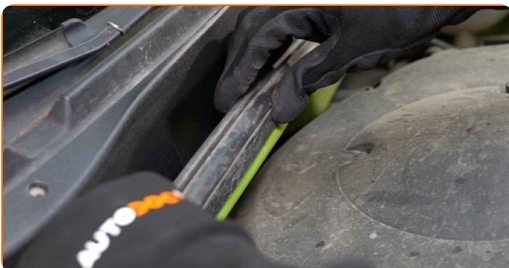

16

Switch on the ignition.

17

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



18

Switch off the ignition.


19

Remove the fender protection cover.



20

Close the hood.

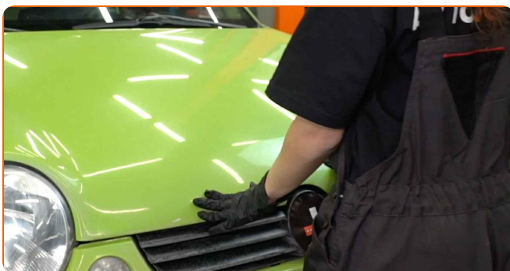

WELL DONE! 👍

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC+

GET IT ON
 **Google Play**

Download on the
 **App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW LUPO 6X1

POLLEN FILTER FOR VW: BUY NOW

POLLEN FILTER FOR VW LUPO 6X1: THE BEST DEALS & OFFERS

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.