



How to change fuel filter
on **Renault Megane 2** –
replacement guide

VIDEO TUTORIAL

** Important!**

This replacement procedure can be used for:

RENAULT MEGANE III Coupe (DZ0/1_) 2.0 TCe, RENAULT MEGANE CC (EZ0/1_) 1.6 16V, RENAULT MEGANE CC (EZ0/1_) 2.0 CVT, RENAULT RAPID Box (F40_, G40_) 1.2, RENAULT CLIO I (B/C57_, 5/357_) 1.2, RENAULT CLIO I (B/C57_, 5/357_) 1.4, RENAULT CLIO I (B/C57_, 5/357_) 1.8 16V, RENAULT CLIO I (B/C57_, 5/357_) 1.8, RENAULT TWINGO I (C06_) 1.2, RENAULT KANGOO Express (FC0/1_) 1.6 16V bivalent, RENAULT LAGUNA I (B56_, 556_) 1.8, RENAULT LAGUNA I (B56_, 556_) 3.0, RENAULT LAGUNA I (B56_, 556_) 2.0, RENAULT CLIO I (B/C57_, 5/357_) 1.8 Rsi, RENAULT LAGUNA I (B56_, 556_) 2.0 16V, (+ 322)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – RENAULT MEGANE 2.
LIST OF THE TOOLS YOU'LL NEED:



- Fuel line pliers
- Fluid container
- Crow bar

BUY TOOLS

Replacement: fuel filter – Renault Megane 2. Tip from AUTODOC experts:


- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – Renault Megane 2 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1 Open the fuel door. Unscrew the fuel filler cap.



2 Lift the car and set it on jack stands.

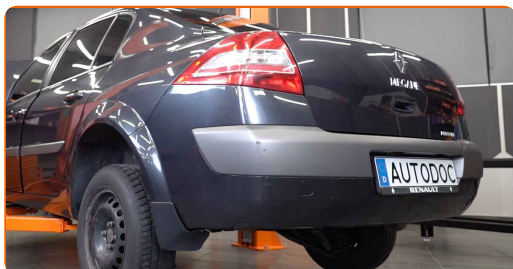


3 Prepare a container for fluids.

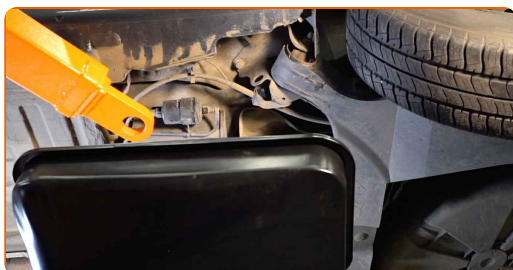

4

Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use fuel line pliers.

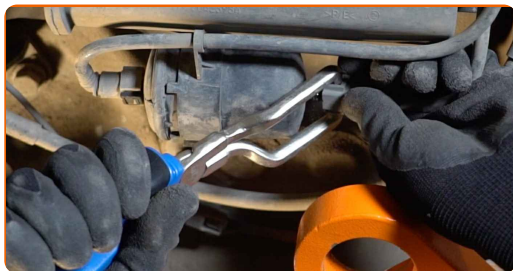

Replacement: fuel filter – Renault Megane 2. Tip from AUTODOC experts:

- Be careful! Fuel may leak from the filter housing and hoses.

5

Remove the fuel filter. Use a crowbar. Put the old filter cartridge in the container.



6

Install a new fuel filter.



Replacement: fuel filter – Renault Megane 2. Professionals recommend:

- Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – Renault Megane 2.


7

Connect the fuel lines to the fuel filter and lock the fastening clips.




8

Lower the car.

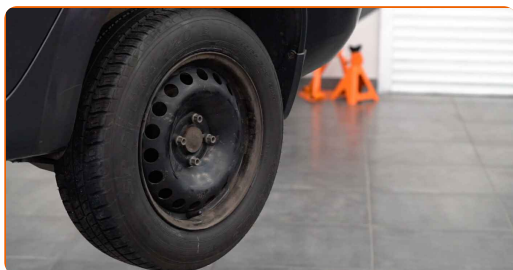

9


Tighten the fuel filler cap. Close the fuel door.

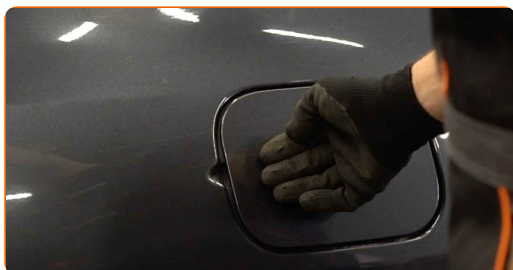

Replacement: fuel filter – Renault Megane 2. AUTODOC experts recommend:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

10 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

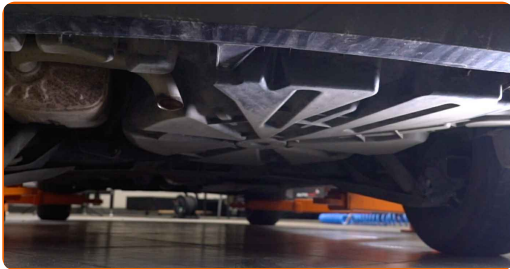

11 Shut off the engine.



Replacement: fuel filter – Renault Megane 2. Tip:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR RENAULT

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR RENAULT MEGANE 2

FUEL FILTER FOR RENAULT: BUY NOW

FUEL FILTER FOR RENAULT MEGANE 2: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.