



How to change fuel filter  
on **Renault Megane**  
**Scenic** – replacement  
guide

## VIDEO TUTORIAL




### **i Important!**

This replacement procedure can be used for:

RENAULT Megane III Coupe (DZ) 2.0 TCe, RENAULT Megane CC (EZ) 1.6 16V, RENAULT Megane CC (EZ) 2.0 CVT, RENAULT Rapid Van (F40, G40) 1.2, RENAULT Rapid Van (F40, G40) 1.4 KAT, RENAULT Rapid Van (F40, G40) 1.4, RENAULT Clio I Hatchback 1.2, RENAULT Clio I Hatchback 1.4, RENAULT Clio I Hatchback 1.8 16V, RENAULT Clio I Hatchback 1.8, RENAULT Twingo I Hatchback 1.2, RENAULT Kangoo I Express (FC) 1.6 16V bivalent, RENAULT Laguna I Hatchback (B56) 1.8, RENAULT Laguna I Hatchback (B56) 3.0, RENAULT Laguna I Hatchback (B56) 2.0, (+ 313)

The steps may slightly vary depending on the car design.

## REPLACEMENT: FUEL FILTER – RENAULT MEGANE SCENIC. TOOLS YOU MIGHT NEED:

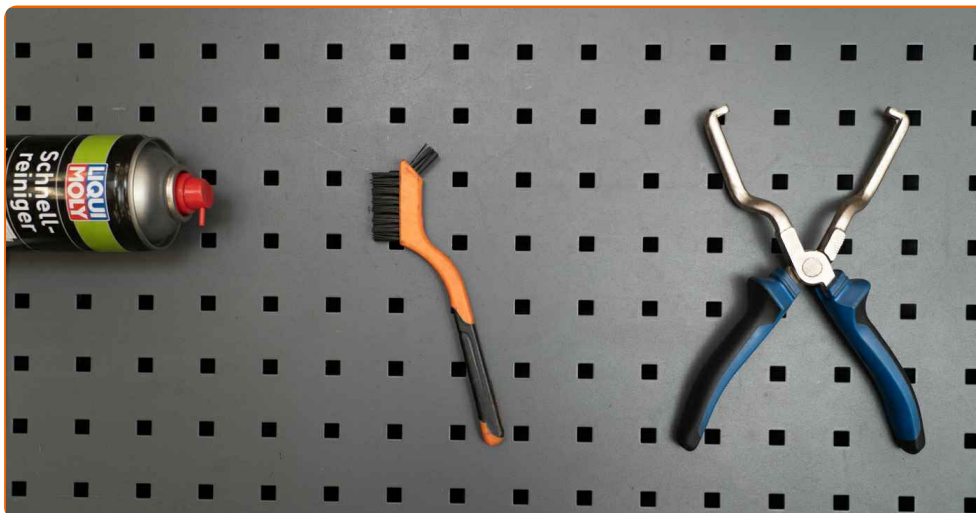

- Nylon cleaning brush
- All-purpose cleaning spray
- Fuel line pliers
- Fluid container

**BUY TOOLS**

Replacement: fuel filter – Renault Megane Scenic. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – Renault Megane Scenic – should be done with the engine switched off.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the fuel door.




2

Unscrew the fuel filler cap.

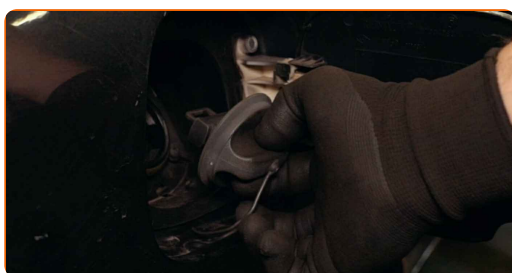

3

Raise the car.

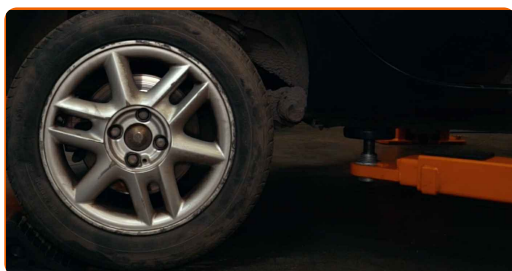


### Replacement: fuel filter – Renault Megane Scenic. Tip:

- If you are using a jack, make sure it rests on a flat surface without any unevenness.
- Be sure to additionally secure the car with jack stands.


4

Prepare a container for fluids.

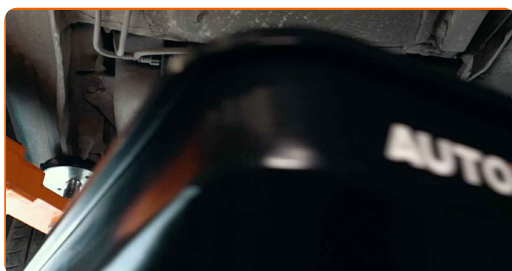

5

Clean the fasteners of the fuel supply lines. Use a nylon cleaning brush. Use all-purpose cleaning spray.

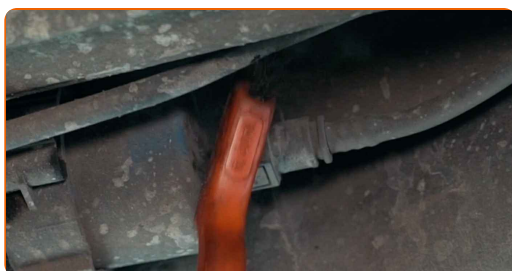

6

Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use fuel line pliers.



## AUTODOC recommends:

- Be careful! Fuel may leak from the filter housing and hoses.

7

Remove the fuel filter.



8

Put the old filter cartridge in the container.


9

Clean the fuel filter bracket. Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



10

Install a new fuel filter.

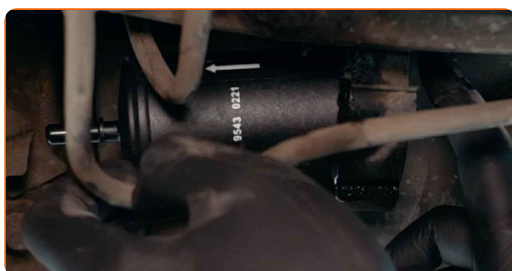

### Replacement: fuel filter – Renault Megane Scenic. Tip from AUTODOC:

- Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Renault Megane Scenic – It's important to only use high-quality filters.


11

Connect the fuel supply lines to the fuel filter.




12

Clean the fuel lines. Use all-purpose cleaning spray.

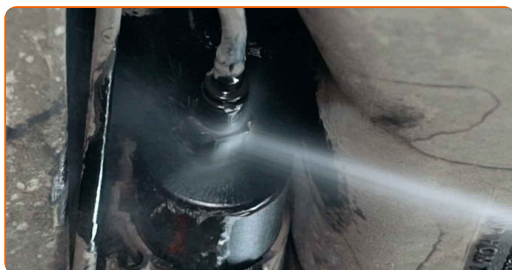


13


Lower the car.

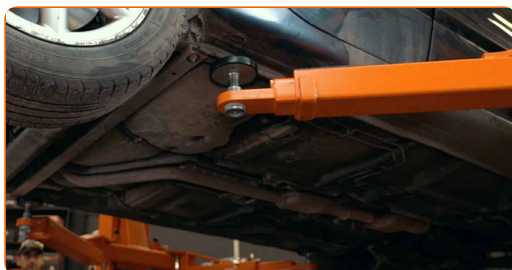

**14** Tighten the fuel filler cap.

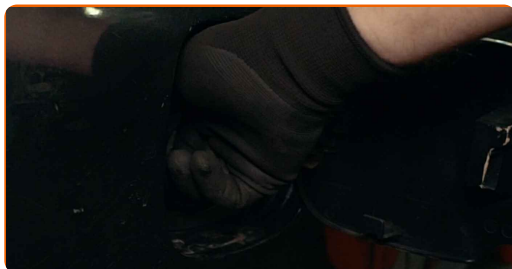

**15** Close the fuel door.

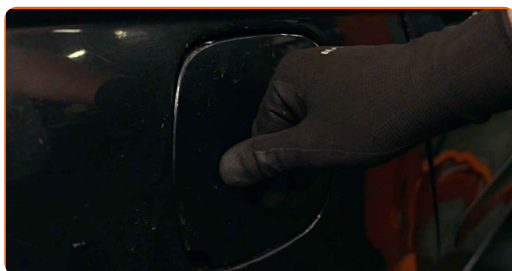

### AUTODOC recommends:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

**16** Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

**17** Shut off the engine.

Replacement: fuel filter – Renault Megane Scenic. AUTODOC experts recommend:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

**WELL DONE!** 

**VIEW MORE TUTORIALS**

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR RENAULT**

**FUEL FILTER: A WIDE SELECTION**

[\*\*CHOOSE CAR PARTS FOR RENAULT MEGANE SCENIC\*\*](#)[\*\*FUEL FILTER FOR RENAULT: BUY NOW\*\*](#)[\*\*FUEL FILTER FOR RENAULT MEGANE SCENIC: THE BEST  
DEALS & OFFERS\*\*](#)

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.