



How to change front coil
springs on **MERCEDES-
BENZ CLK Convertible
(A208)** – replacement
guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

ⓘ Important!


This replacement procedure can be used for:

MERCEDES-BENZ CLK Convertible (A208) 200 2.0 Kompressor (208.445),
 MERCEDES-BENZ CLK Convertible (A208) 200 2.0 (208.435), MERCEDES-BENZ CLK
 Convertible (A208) 230 2.3 Kompressor (208.447), MERCEDES-BENZ CLK Convertible
 (A208) 200 2.0 Kompressor (208.444), MERCEDES-BENZ CLK Convertible (A208) 230
 2.3 Kompressor (208.448)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part
 on: MERCEDES-BENZ E-Class Saloon (W210) E 200 (210.035)

REPLACEMENT: COIL SPRINGS – MERCEDES-BENZ CLK CONVERTIBLE (A208). LIST OF THE TOOLS YOU'LL NEED:

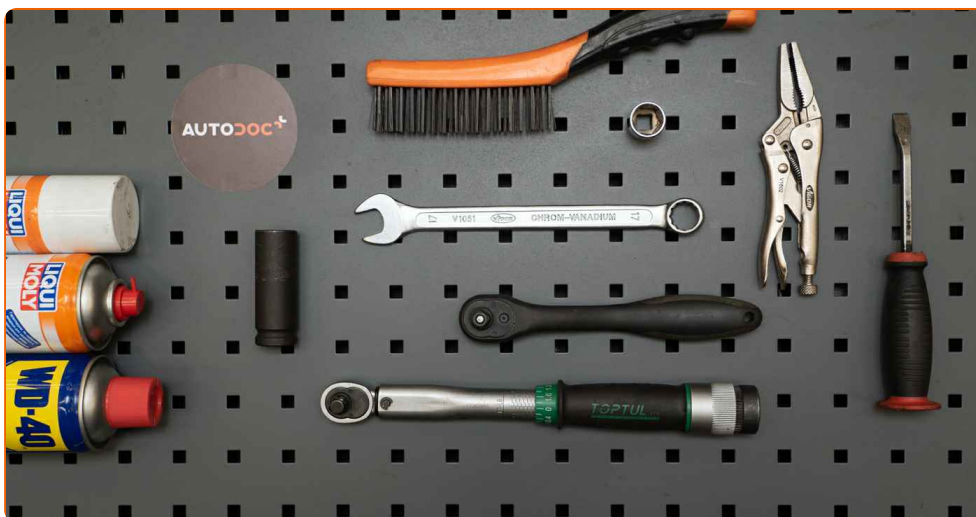

- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Combination spanner #17
- Drive socket # 17
- Wheel impact socket #17
- Ratchet wrench
- Torque wrench
- Crow bar
- Flat Screwdriver
- Strut spring compressor
- Water pump pliers
- Wheel chock

Buy tools

Replacement: coil springs – MERCEDES-BENZ CLK Convertible (A208).
AUTODOC experts recommend:

- Replace both front shock absorbers at a time.
- The replacement procedure is identical for the left and right shock absorbers of the front suspension.
- Please note: all work on the car – MERCEDES-BENZ CLK Convertible (A208) – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Secure the wheels with chocks.



2

Loosen the wheel mounting bolts. Use wheel impact socket #17.



3

Raise the front of the car and secure on supports.

4

Unscrew the wheel bolts.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.
MERCEDES-BENZ CLK Convertible (A208)

5

Remove the wheel.



6


Install the coil spring compressor on the coil spring.



Replacement: coil springs – MERCEDES-BENZ CLK Convertible (A208). Tip:

- Use adapters and jaws of the appropriate size.
- The spring coils should be securely fixed with the coil spring compressor.
- Use high quality coil spring compressors.

7 Compress the spring by turning the lead screw of the coil spring compressor. Use a combination spanner. The wrench size may vary depending on the spring compressor manufacturer.

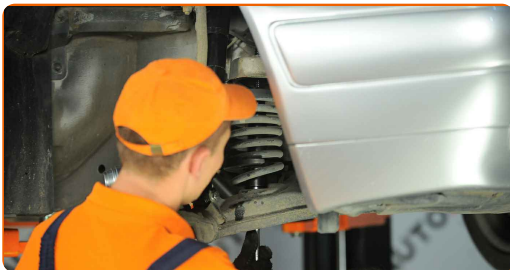

Replacement: coil springs – MERCEDES-BENZ CLK Convertible (A208). Tip from AUTODOC experts:

- Compress the coil spring compressor until there is enough room to remove the spring. Do not compress the tool to the full: the spring coils must not touch each other.
- Be careful. The compressed spring is powerful and in case of disrupting ties, straightening, it can cause injury.

8 Clean the shock absorber fasteners. Use a wire brush. Use WD-40 spray.

- 9** Unscrew the lower fastener of the shock absorber. Use a combination spanner #17. Use a drive socket #17. Use a ratchet wrench.




- 10** Detach the lower part of the shock absorber.

- 11** Pull down the suspension control arm. Use a crowbar.



- 12** Remove the coil spring together with the coil spring compressor. Use water pump pliers.

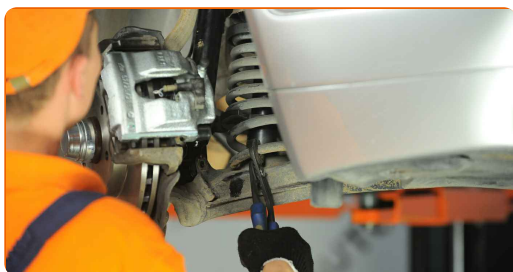

Replacement: coil springs – MERCEDES-BENZ CLK Convertible (A208).
AUTODOC recommends:

- While the spring is compressed, do not do any operations on it.

13

Secure the coil spring compressor on a work bench.




14

Decompress the spring.

15

Take out the spring.

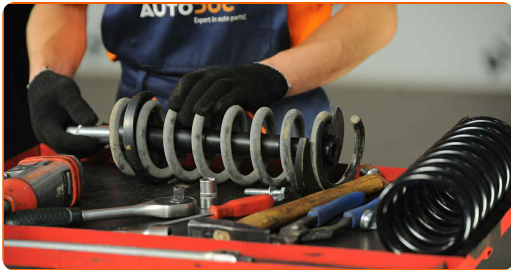

16


Clean the coil spring mounting seats.

17

Inspect the rubber mounts of the suspension spring. Replace if necessary.

18


Install a new coil spring on the coil spring compressor.

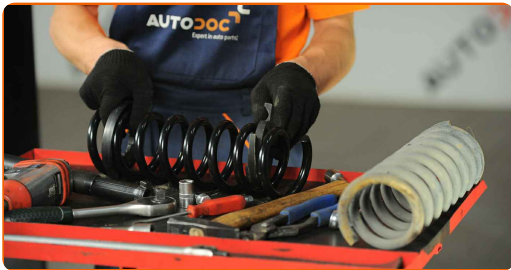

Replacement: coil springs – MERCEDES-BENZ CLK Convertible (A208).
 AUTODOC experts recommend:


- Use adapters and jaws of the appropriate size.

19 Compress the spring.

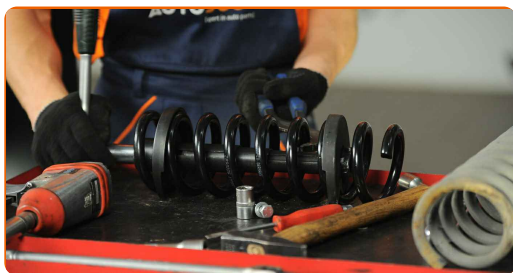


20 Pull down the suspension control arm. Use a crowbar.


21 Install the coil spring together with the rubber mounts into the mounting seats. Use water pump pliers.

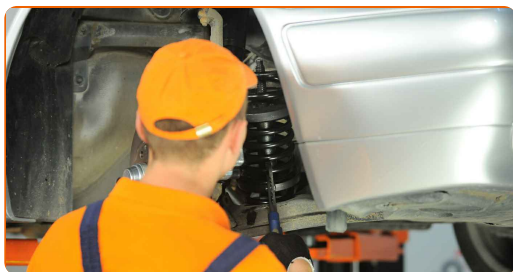

22 Attach the lower part of the shock absorber. Use a flat screwdriver.

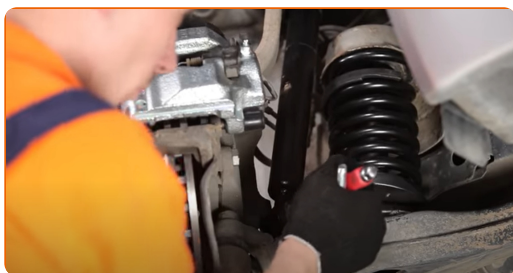


23 Release the coil spring by turning the lead screw of the coil spring compressor.

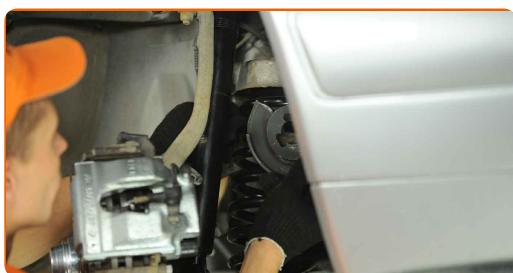


24 Remove the coil spring compressor.



25 Tighten the lower fastener of the shock absorber. Use a combination spanner #17. Use a drive socket #17. Use a torque wrench. Tighten it to 55 Nm torque.

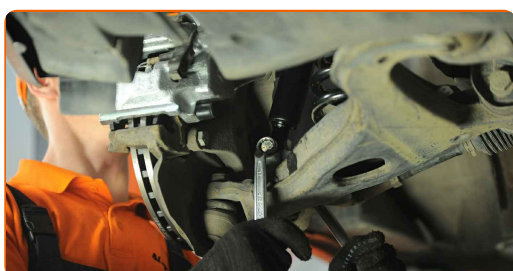

26 Treat the shock absorber fasteners. Use copper grease.

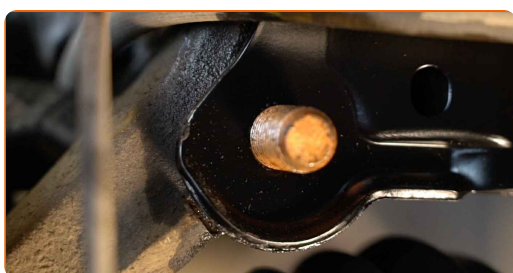

27 Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



28 Clean the brake disk surface. Use a brake cleaner.



AUTODOC recommends:

- Replacement: coil springs – MERCEDES-BENZ CLK Convertible (A208). After applying the spray, wait a few minutes.

29

Install the wheel.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. MERCEDES-BENZ CLK Convertible (A208)

30

Screw in the wheel bolts. Use wheel impact socket #17.




31

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 110 nm torque.



32

Remove the jacks and chocks.

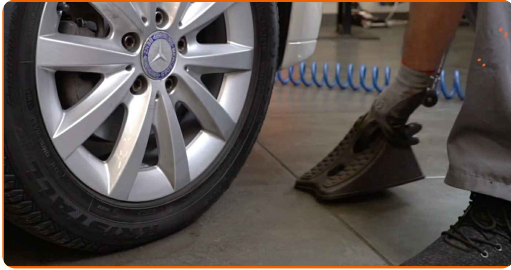

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

COIL SPRINGS: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.