



How to change
serpentine belt on
MERCEDES-BENZ T2/LN1
Platform/Chassis –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle


Important!

This replacement procedure can be used for:
 MERCEDES-BENZ T2/LN1 Platform/Chassis 510 2.3 (667.001, 667.002)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: MERCEDES-BENZ 190 (W201) 2.0 (201.023)

REPLACEMENT: SERPENTINE BELT – MERCEDES-BENZ
T2/LN1 PLATFORM/CHASSIS. TOOLS YOU'LL NEED:

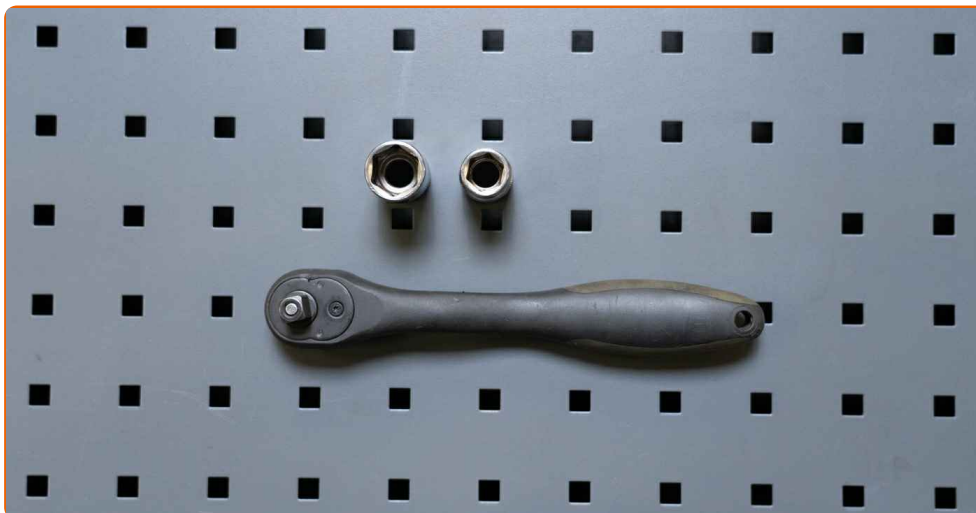

- Drive socket # 13
- Drive socket # 17
- Ratchet wrench
- Fender cover

Buy tools

Replacement: serpentine belt – MERCEDES-BENZ T2/LN1 Platform/Chassis.
 AUTODOC experts recommend:

- All work should be done with the engine stopped.

REPLACEMENT: SERPENTINE BELT – MERCEDES-BENZ T2/LN1 PLATFORM/CHASSIS. USE THE FOLLOWING PROCEDURE:


1 Open the bonnet.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Unscrew the fastening bolt of the belt tensioner. Use a drive socket #17. Use a ratchet wrench.




4 Loosen the belt tensioner. Use a drive socket #13. Use a ratchet wrench.

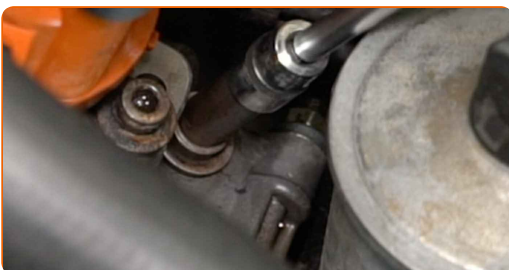

5

Remove the V-ribbed belt.

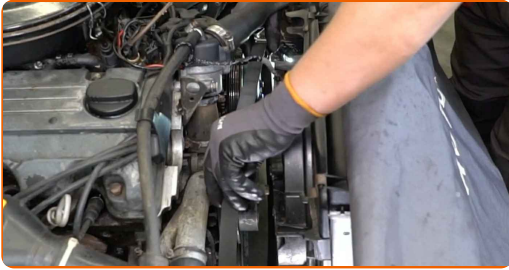

AUTODOC recommends:

- Check the condition of the tensioner pulley and idler pulley. Replace them if necessary.

6

Install the V-ribbed belt.




Replacement: serpentine belt – MERCEDES-BENZ T2/LN1 Platform/Chassis.

Tip:

- Make sure that the V-ribbed belt fits all pulleys snugly.

7

Tighten the belt tensioner. Use a drive socket #13. Use a ratchet wrench.

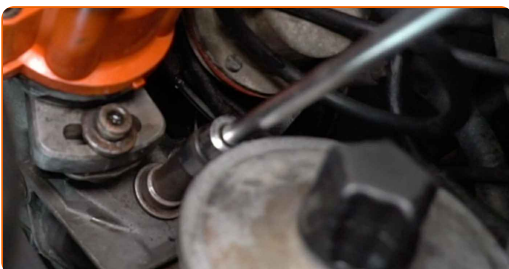

AUTODOC recommends:

- Make sure that the V-ribbed belt is properly tensioned.

8

Screw in the fastening bolt of the belt tensioner. Use a drive socket #17. Use a ratchet wrench.




9

Remove the fender protection cover.

10

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

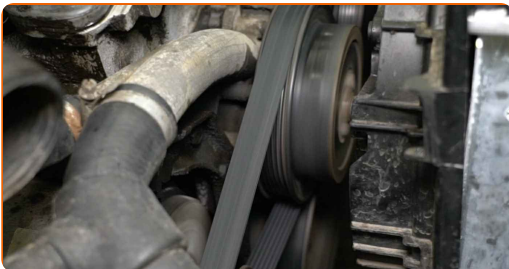

11

Shut off the engine.

12

Close the hood.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

SERPENTINE BELT: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.