



How to change air filter  
on **Opel Meriva X03** –  
replacement guide

## VIDEO TUTORIAL



### **i Important!**


This replacement procedure can be used for:

OPEL Meriva A (X03) 1.4 16V Twinport LPG (E75), OPEL Corsa C Hatchback (X01) 1.0 (F08, F68), OPEL Corsa C Hatchback (X01) 1.2 (F08, F68), OPEL Corsa C Hatchback (X01) 1.8 (F08, F68), OPEL Corsa C Hatchback (X01) 1.7 DTI (F08, F68), OPEL Corsa C Hatchback (X01) 1.7 DI (F08, F68), OPEL Corsa C Hatchback (X01) 1.4 (F08, F68), OPEL COMBO Box Body / Estate 1.7 DI 16V, OPEL Corsa C Van (X01) 1.2 16V (F08, W5L), OPEL Corsa C Van (X01) 1.7 DI 16V (F08, W5L), OPEL Corsa C Van (X01) 1.7 DTI 16V (F08, W5L), OPEL COMBO Box Body / Estate 1.6, OPEL COMBO Box Body / Estate 1.7 DTI 16V, OPEL Meriva A (X03) 1.8 (E75), OPEL Meriva A (X03) 1.7 DTI (E75), (+ 32)

The steps may slightly vary depending on the car design.

## REPLACEMENT: AIR FILTER – OPEL MERIVA X03.

### TOOLS YOU NEED:

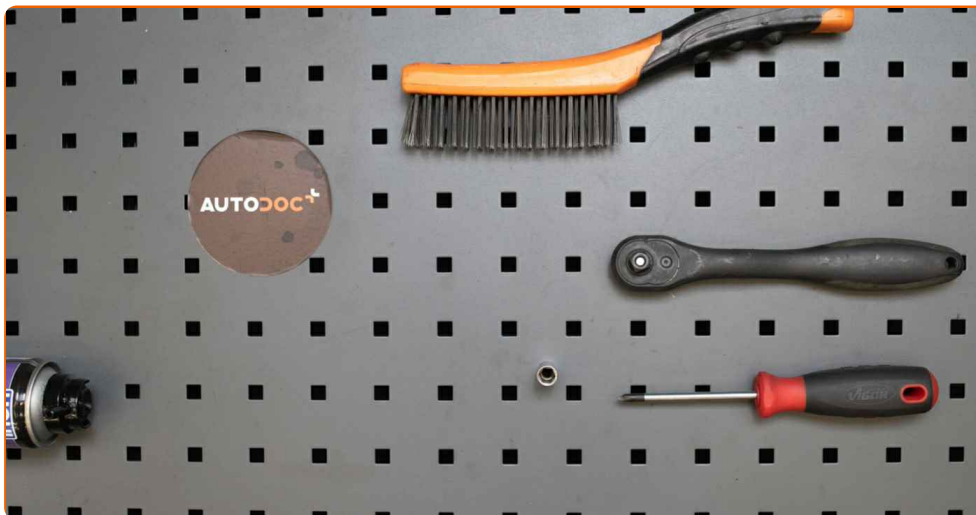

- Electronic spray
- Drive socket # 7
- Ratchet wrench
- Phillips Screwdriver
- Microfibre towel
- Fender cover

[BUY TOOLS](#)

### Replacement: air filter – Opel Meriva X03. AUTODOC recommends:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- Please note: all work on the car – Opel Meriva X03 – should be done with the engine switched off.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the bonnet.




2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

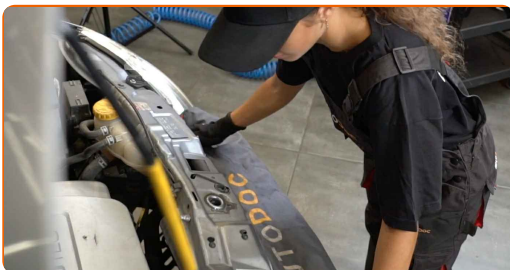

3


Detach the air intake hose clamp. Use a drive socket #7. Use a ratchet wrench.

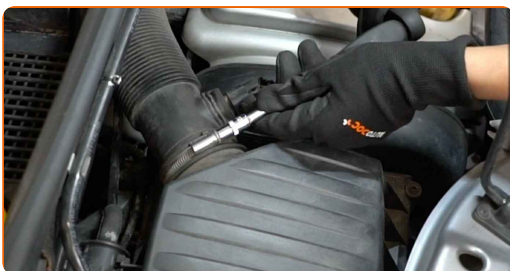


- 4 Disconnect the air intake pipe from the air filter housing.




- 5 Cover the air intake hose with a microfibre towel to prevent dust and dirt from getting into the system.

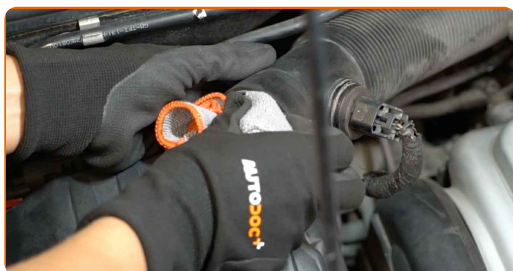

- 6 Unplug the mass air flow sensor connector.

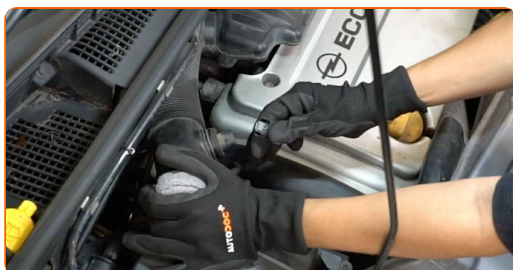


- 7 Undo the fastening screws of the air filter cover. Use a Phillips screwdriver.

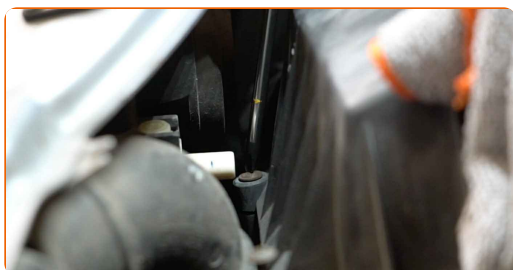


8

Take off the filter lid.

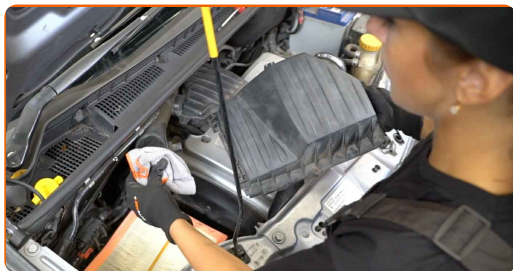

9

Remove the filter element from the filter housing.

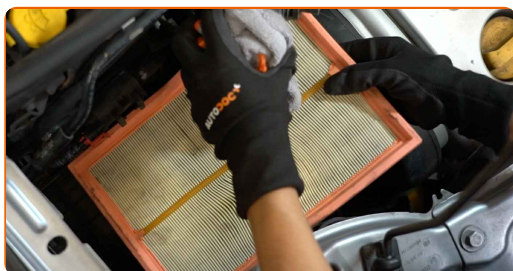

10

Clean the air filter cover and housing.



Replacement: air filter – Opel Meriva X03. AUTODOC recommends:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

11

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.




### AUTODOC recommends:

- Replacement: air filter – Opel Meriva X03. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.


12

Reinstall the air filter cover. Fasten it.

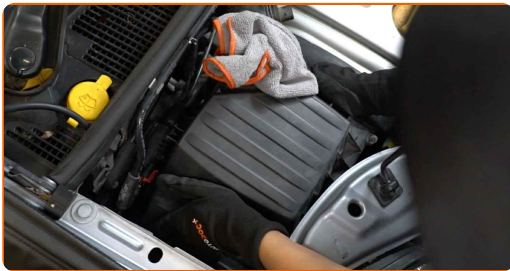


13

Screw in the fastening screws of the air filter cover. Use a Phillips screwdriver.

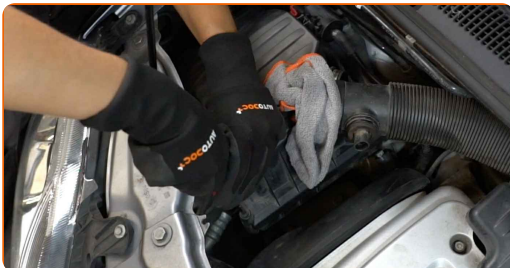





- 14** Remove the microfibre towel from the air intake hose.

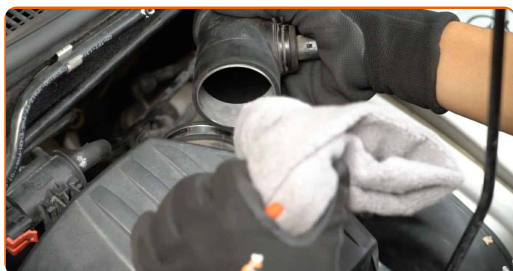

- 15** Connect the air intake pipe to the air filter housing.

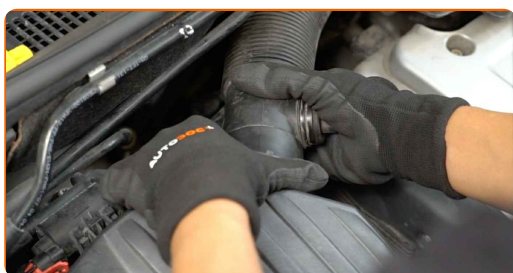


- 16** Fasten the clamp on the air intake hose. Use a drive socket #7. Use a ratchet wrench.

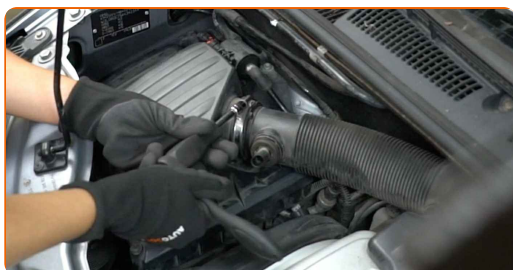

- 17** Treat the mass air flow sensor connector. Use electronic spray.



- 18** Plug in the mass air flow sensor connector.

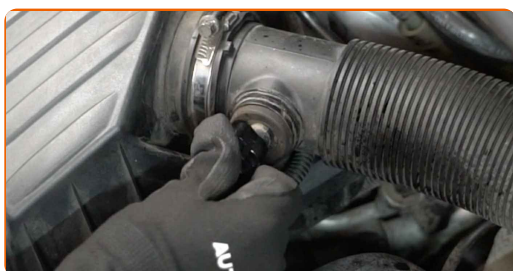



19

Remove the fender protection cover.



20

Close the hood.



**WELL DONE!** 

**VIEW MORE TUTORIALS**

## AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR OPEL**

**AIR FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR OPEL MERIVA X03**

**AIR FILTER FOR OPEL: BUY NOW**

**AIR FILTER FOR OPEL MERIVA X03: THE BEST DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.