



How to change fuel filter
on **Opel Meriva X03** –
replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:

OPEL Corsa B Hatchback (S93) 1.2 i (X 12 SZ, C 12 NZ), OPEL Corsa B Hatchback (S93) 1.4 i (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.4 Si (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 GSI 16V (F08, F68, M68), OPEL Omega B Saloon (V94) 2.0 (F69, M69, P69), OPEL Omega B Saloon (V94) 2.0 16V (F69, M69, P69), OPEL Omega B Saloon (V94) 2.5 V6 (F69, M69, P69), OPEL Omega B Saloon (V94) 3.0 V6 (F69, M69, P69), OPEL Omega B Caravan (V94) 2.0 (F35, M35, P35), OPEL Omega B Caravan (V94) 2.0 16V (F35, M35, P35), OPEL Omega B Caravan (V94) 2.5 V6 (F35, M35, P35), OPEL Omega B Caravan (V94) 3.0 V6 (F35, M35, P35), OPEL Corsa B Hatchback (S93) 1.4 i 16V (F08, F68, M68), OPEL Corsa B Hatchback (S93) 1.6 i 16V (F08, F68, M68), OPEL COMBO (71_) 1.2, (+ 171)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – OPEL MERIVA X03. LIST OF THE TOOLS YOU'LL NEED:

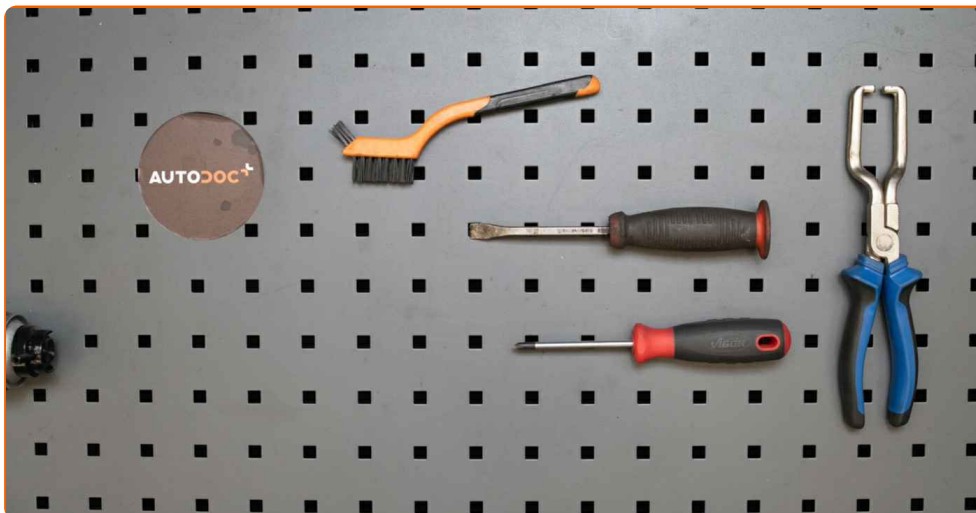

- All-purpose cleaning spray
- Nylon cleaning brush
- Phillips Screwdriver
- Crow bar
- Fluid container
- Fuel line pliers

BUY TOOLS

Replacement: fuel filter – Opel Meriva X03. AUTODOC recommends:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – OPEL MERIVA X03. RECOMMENDED SEQUENCE OF STEPS:

1 Open the fuel door.



2 Unscrew the fuel filler cap.



3 Lift the car using a jack or place it over an inspection pit.

4 Prepare a container for fluids.



5

Clean the fasteners of the fuel supply lines. Use a nylon cleaning brush. Use all-purpose cleaning spray.



6

Disconnect the fuel supply lines from the fuel filter. Use fuel line pliers. Use a crowbar.




Replacement: fuel filter – Opel Meriva X03. Tip from AUTODOC experts:

- Be careful! Fuel may leak from the filter housing and hoses.

7


Unscrew the fuel filter bracket. Use a Phillips screwdriver.

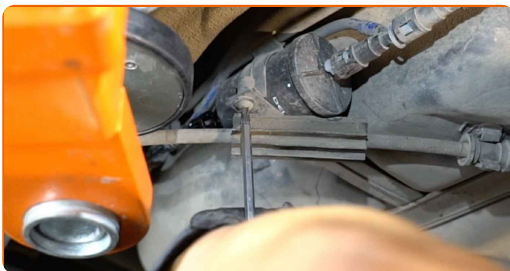


8 Remove the fuel filter. Use a crowbar.



9 Put the old filter cartridge in the container.

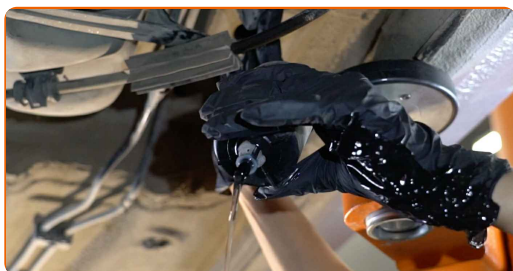

10 Install a new fuel filter.

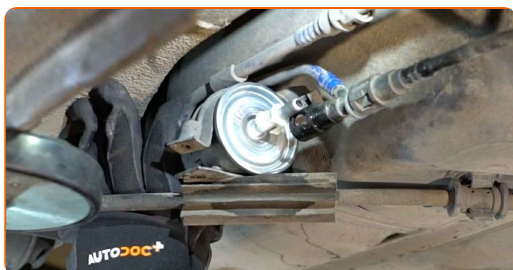


Replacement: fuel filter – Opel Meriva X03. AUTODOC experts recommend:

- Remember, it is important not to mix up the input and output of the filter. Arrows on the filter indicate the direction of fuel flow.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Opel Meriva X03 – It's important to only use high-quality filters.

11 Connect the fuel supply lines to the fuel filter.




12 Screw in the fuel filter mounting bracket. Use a Phillips screwdriver.

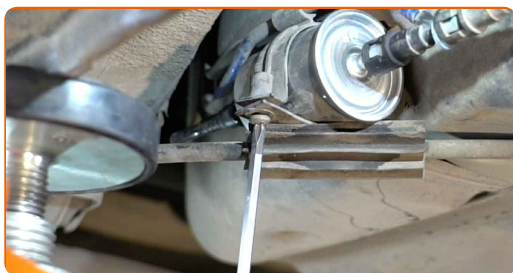

13 Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



14 Take the fluid container away from under the fuel filter.

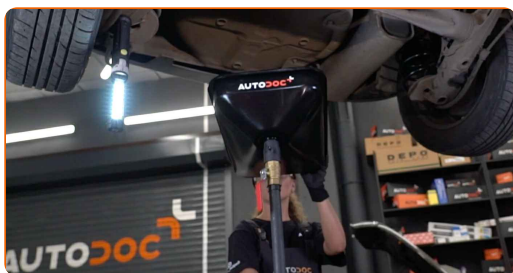

15 Lower the car.

16 Tighten the fuel filler cap.



17 Close the fuel door.



Replacement: fuel filter – Opel Meriva X03. Professionals recommend:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

18 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



19 Shut off the engine.

Replacement: fuel filter – Opel Meriva X03. Tip:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR OPEL

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR OPEL MERIVA X03

FUEL FILTER FOR OPEL: BUY NOW

FUEL FILTER FOR OPEL MERIVA X03: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.