



How to change rear
silencer on **Nissan Micra**
K12 – replacement guide

VIDEO TUTORIAL

** Important!**

This replacement procedure can be used for:

NISSAN MICRA III (K12) 1.2 16V, NISSAN MICRA III (K12) 1.5 dCi, NISSAN Note (E11, NE11) 1.4, NISSAN MICRA III (K12) 1.2 LPG, NISSAN Note (E11, NE11) 1.4 LPG

The steps may slightly vary depending on the car design.

**REPLACEMENT: REAR SILENCER – NISSAN MICRA K12.
TOOLS YOU NEED:**



- Wire brush
- Sandpaper
- WD-40 spray
- Drive socket # 13
- Ratchet wrench
- Crow bar
- Hammer
- Hydraulic transmission jack


BUY TOOLS

Replacement: rear silencer – Nissan Micra K12. Professionals recommend:

- All work should be done with the engine stopped.

REPLACEMENT: REAR SILENCER – NISSAN MICRA K12. RECOMMENDED SEQUENCE OF STEPS:


- 1 Lift the car using a jack or place it over an inspection pit.

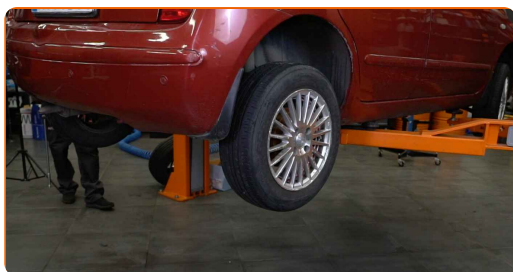

- 2 Clean the exhaust silencer clamp. Use a wire brush. Use WD-40 spray.




- 3 Loosen the exhaust silencer clamp. Use a drive socket #13. Use a ratchet wrench.

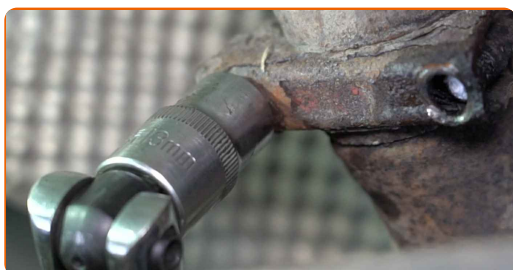


4 Support the silencer. Use a hydraulic transmission jack.




5 Treat the rubber mounts of the exhaust silencer. Use WD-40 spray.

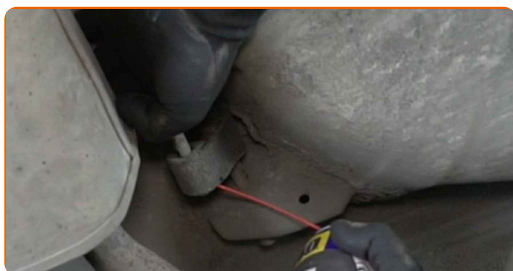

6 Detach the rubber mounts of the exhaust silencer. Use a crowbar.

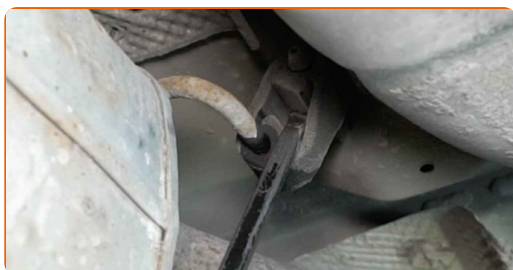

7 Detach the exhaust silencer from the exhaust pipe. Use a crowbar. Use a hammer.

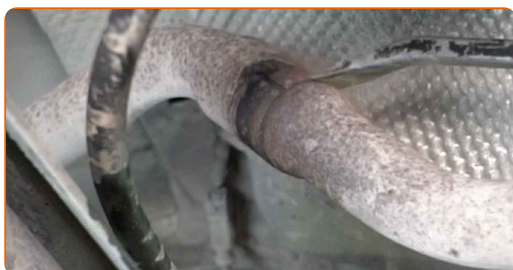

Replacement: rear silencer – Nissan Micra K12. AUTODOC recommends:

- To avoid injury, hold the silencer firmly when you remove it and when lowering the transmission jack.

8

Remove the hydraulic transmission jack.

9

Remove the exhaust silencer.



Replacement: rear silencer – Nissan Micra K12. Tip:


- Inspect the rubber mounts of the exhaust silencer. Replace them if necessary.

10


Clean the mounting seat of the silencer on the exhaust pipe. Use a wire brush. Use sandpaper.




11 Install a new exhaust silencer.

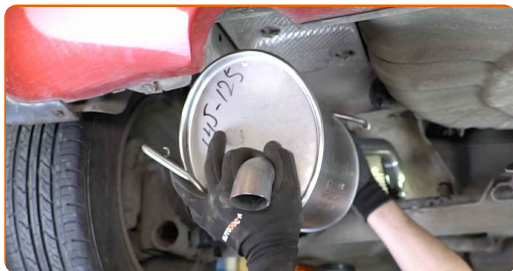


12 Attach the exhaust silencer to the exhaust pipe.

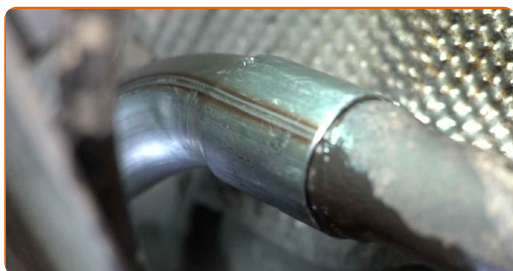

13 Attach the rubber mounts to the exhaust silencer.

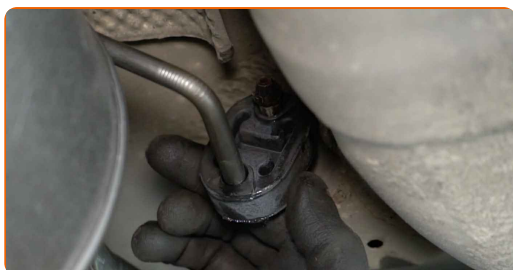

14 Tighten the exhaust silencer clamp. Use a drive socket #13. Use a ratchet wrench.

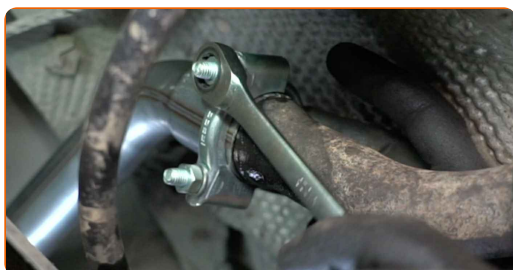

AUTODOC recommends:

- Do not overtighten the clamp, or you might damage it.

15 Lower the car.



16 Run the engine for a few minutes.



Replacement: rear silencer – Nissan Micra K12. AUTODOC experts recommend:

- This is necessary in order to make sure that the component operates properly.

17 Shut off the engine.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR NISSAN

REAR SILENCER: A WIDE SELECTION

CHOOSE CAR PARTS FOR NISSAN MICRA K12

REAR SILENCER FOR NISSAN: BUY NOW

**REAR SILENCER FOR NISSAN MICRA K12: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.