



How to change air filter
on **Ford Mondeo Mk3**
saloon – replacement
guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

FORD Mondeo Mk3 Estate (BWY) 2.2 TDCi, FORD Mondeo Mk3 Saloon (B4Y) 1.8 16V, FORD Mondeo Mk3 Saloon (B4Y) 2.5 V6 24V, FORD Mondeo Mk3 Saloon (B4Y) 2.0 16V DI / TDDi / TDCi, FORD Mondeo Mk3 Saloon (B4Y) 2.0 16V TDDi / TDCi, FORD Mondeo Mk3 Hatchback (B5Y) 1.8 16V, FORD Mondeo Mk3 Estate (BWY) 1.8 16V, FORD Mondeo Mk3 Hatchback (B5Y) 2.0 16V, FORD Mondeo Mk3 Estate (BWY) 2.0 16V, FORD Mondeo Mk3 Hatchback (B5Y) 2.5 V6 24V, FORD Mondeo Mk3 Estate (BWY) 2.5 V6 24V, FORD Mondeo Mk3 Hatchback (B5Y) 2.0 16V DI / TDDi / TDCi, FORD Mondeo Mk3 Estate (BWY) 2.0 16V DI / TDDi / TDCi, FORD Mondeo Mk3 Hatchback (B5Y) 2.0 16V TDDi / TDCi, FORD Mondeo Mk3 Estate (BWY) 2.0 16V TDDi / TDCi, (+ 14)

The steps may slightly vary depending on the car design.

REPLACEMENT: AIR FILTER – FORD MONDEO MK3
SALOON. TOOLS YOU MIGHT NEED:



- Drive socket # 7
- Ratchet wrench
- Phillips screwdriver
- Microfibre towel
- Fender cover

BUY TOOLS


Replacement: air filter – Ford Mondeo Mk3 saloon. AUTODOC recommends:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- All work should be done with the engine stopped.


**REPLACEMENT: AIR FILTER – FORD MONDEO MK3 SALOON.
RECOMMENDED SEQUENCE OF STEPS:**

1 Open the hood.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

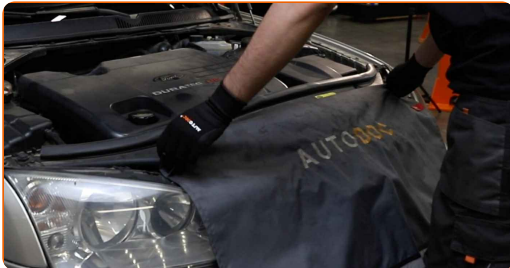

3 Undo the fastening screws of the air filter cover. Use a Phillips screwdriver.

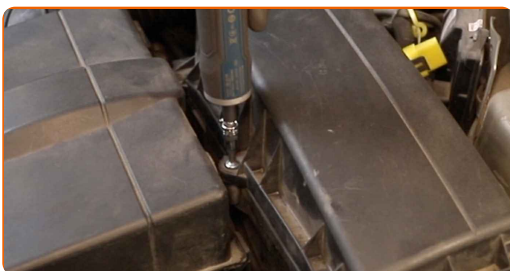

- 4 Loosen the fastening clamp connecting the air duct to the air filter housing. Use a drive socket #7. Use a ratchet wrench.



- 5 Detach the air duct housing from the air filter housing.



- 6 Take off the filter lid.



AUTODOC recommends:

- Replacement: air filter – Ford Mondeo Mk3 saloon. Do not use excessive force when removing the part as this may damage it.

7

Cover the air intake hose with a microfibre towel to prevent dust and dirt from getting into the system.



8

Remove the filter element from the filter housing.



9

Clean the air filter cover and housing.



Replacement: air filter – Ford Mondeo Mk3 saloon. AUTODOC experts recommend:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

10

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.



AUTODOC recommends:

- Replacement: air filter – Ford Mondeo Mk3 saloon. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

11

Remove the microfibre towel from the air intake hose.



12

Install the air duct housing.




- 13 Reinstall the air filter cover. Fasten it.




AUTODOC recommends:

- Replacement: air filter – Ford Mondeo Mk3 saloon. To avoid damaging the part during installation, do not use excessive force.

- 14 Screw the fastening clamp connecting the air duct to the air filter housing. Use a drive socket #7. Use a ratchet wrench.

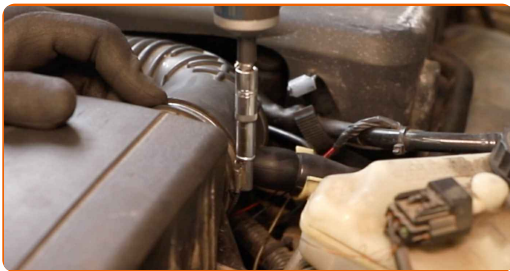


- 15 Screw in the fastening screws of the air filter cover. Use a Phillips screwdriver.

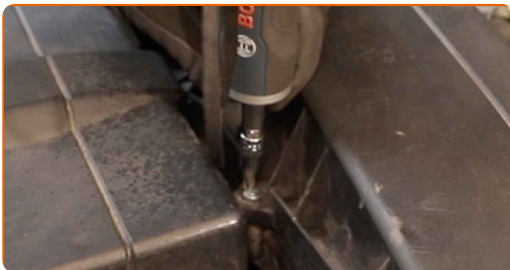

16

Remove the fender protection cover.

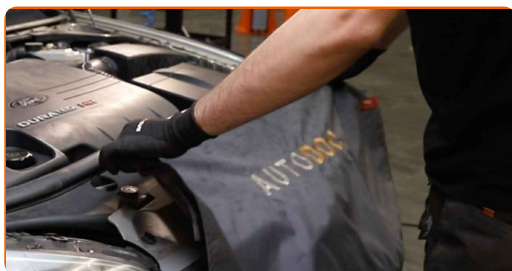

17

Close the hood.

**WELL DONE!** [VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC⁺

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR FORD

AIR FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR FORD MONDEO MK3 SALOON

AIR FILTER FOR FORD: BUY NOW

**AIR FILTER FOR FORD MONDEO MK3 SALOON: THE BEST
DEALS & OFFERS**

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.