



How to change fuel filter
on **VW Multivan T5** –
replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:

VW Transporter T5 Minibus (7HB, 7HJ, 7EB, 7EJ, 7EF, 7EG, 7HF, 7EC) 2.0 TDI, VW Transporter T5 Minibus (7HB, 7HJ, 7EB, 7EJ, 7EF, 7EG, 7HF, 7EC) 2.0 TDI 4motion, VW Multivan T5 (7HM, 7HN, 7HF, 7EF, 7EM, 7EN) 2.0 TDI, VW Multivan T5 (7HM, 7HN, 7HF, 7EF, 7EM, 7EN) 2.0 TDI 4motion, VW Touareg I (7LA, 7L6, 7L7) 2.5 R5 TDI, VW Multivan T5 (7HM, 7HN, 7HF, 7EF, 7EM, 7EN) 2.5 TDI, VW Multivan T5 (7HM, 7HN, 7HF, 7EF, 7EM, 7EN) 1.9 TDI, VW Transporter T5 Platform / Chassis (7JD, 7JE, 7JL, 7JY, 7JZ, 7FD) 1.9 TDI, VW Transporter T5 Platform / Chassis (7JD, 7JE, 7JL, 7JY, 7JZ, 7FD) 2.5 TDI, VW Transporter T5 Van (7HA, 7HH, 7EA, 7EH) 1.9 TDI, VW Transporter T5 Van (7HA, 7HH, 7EA, 7EH) 2.5 TDI, VW Transporter T5 Minibus (7HB, 7HJ, 7EB, 7EJ, 7EF, 7EG, 7HF, 7EC) 1.9 TDI, VW Transporter T5 Minibus (7HB, 7HJ, 7EB, 7EJ, 7EF, 7EG, 7HF, 7EC) 2.5 TDI, VW Transporter T5 Van (7HA, 7HH, 7EA, 7EH) 2.5 TDI 4motion, VW Transporter T5 Minibus (7HB, 7HJ, 7EB, 7EJ, 7EF, 7EG, 7HF, 7EC) 2.5 TDI 4motion, (+ 23)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW MULTIVAN T5. LIST OF THE TOOLS YOU'LL NEED:

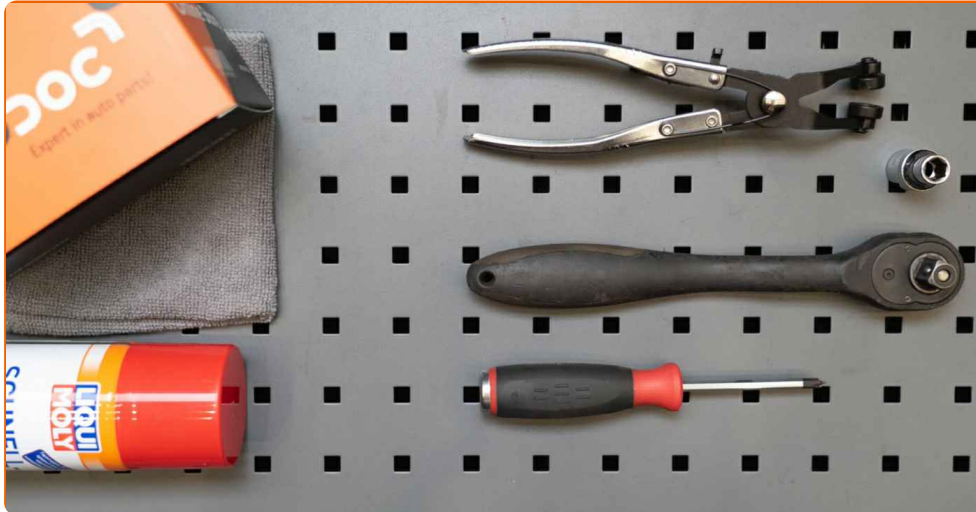

- All-purpose cleaning spray
- Drive socket # 10
- Ratchet wrench
- Phillips Screwdriver
- Flat Screwdriver
- Clic-R collar pliers
- Fuel line pliers
- Fluid container
- Fender cover

BUY TOOLS

Replacement: fuel filter – VW Multivan T5. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – VW Multivan T5 – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1

Open the hood.



2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



3

Remove the engine cover clips. Use a flat screwdriver.




4

Remove the engine cover.




5

Detach the coolant expansion tank connector. Use a flat screwdriver.

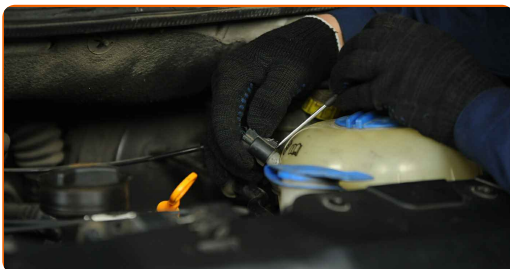


6

Loosen the coolant pipe clamp. Use clic-R collar pliers.

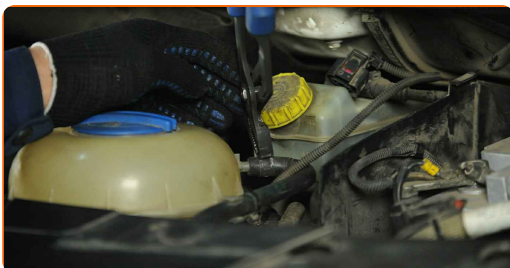

7

Detach the coolant tank hose. Use a flat screwdriver.

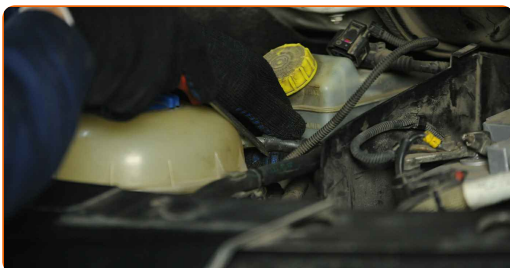


8

Unscrew the fasteners of the coolant reservoir. Use a Phillips screwdriver.



9

Remove the coolant reservoir.

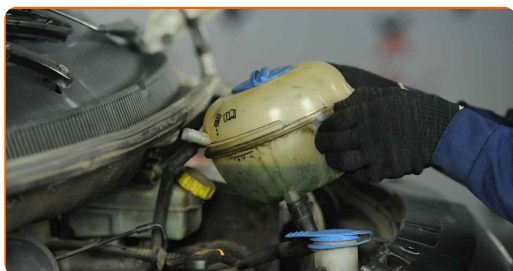

10


Prepare a container for fluids.

11

Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.

12


Disconnect the fuel supply lines from the fuel filter. Use fuel line pliers. Use a flat screwdriver.

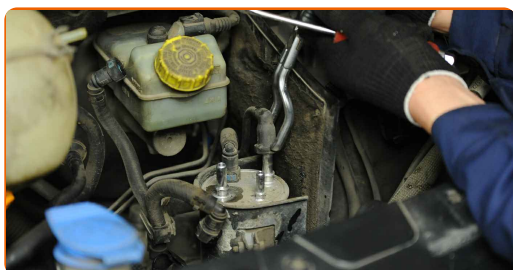

Replacement: fuel filter – VW Multivan T5. Professionals recommend:

- Be careful! Fuel may leak from the filter housing and hoses.

13 Unscrew the fuel filter bracket. Use a drive socket #10. Use a ratchet wrench.

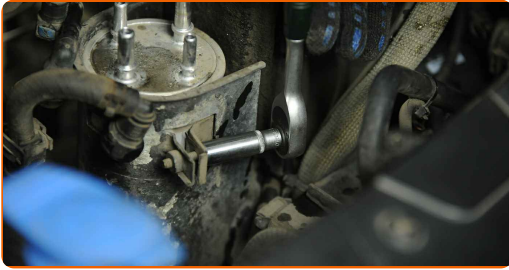

14 Remove the fuel filter. Use a flat screwdriver. Put the old filter cartridge in the container.



Replacement: fuel filter – VW Multivan T5. AUTODOC experts recommend:

- Be careful! Fuel may leak from the filter housing and hoses.

15 Install a new fuel filter.




AUTODOC recommends:

- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – VW Multivan T5.


16

Screw in the fuel filter mounting bracket. Use a drive socket #10. Use a ratchet wrench.

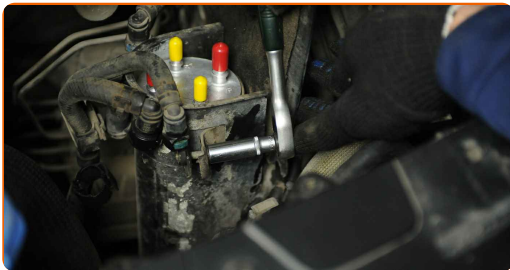


17

Connect the fuel lines to the new fuel filter.

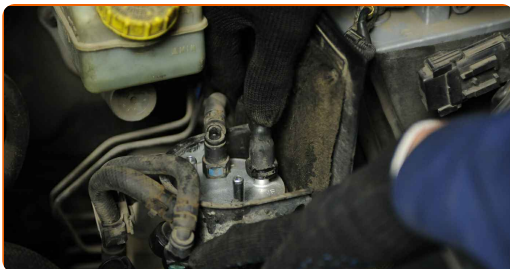


18


Install the coolant reservoir.

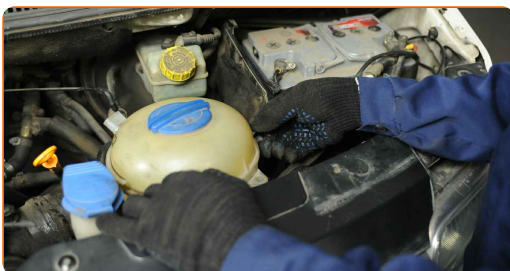


19 Screw in the coolant reservoir fasteners. Use a Phillips screwdriver.

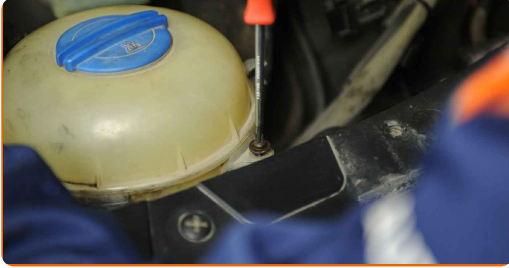


20 Attach the coolant tank hose.

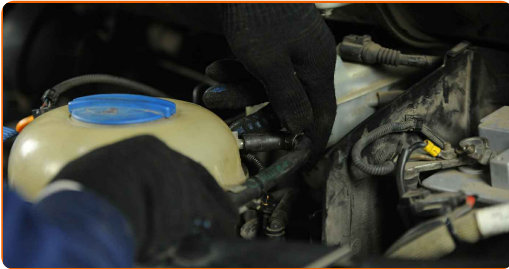

21 Secure the coolant hose clamp. Use clic-R collar pliers.

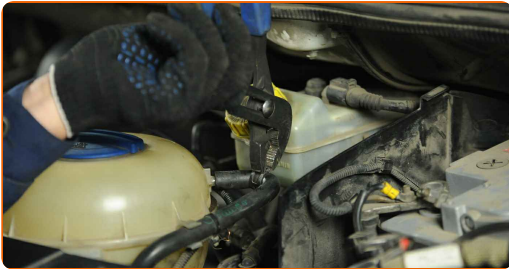

22 Attach the coolant expansion tank connector.

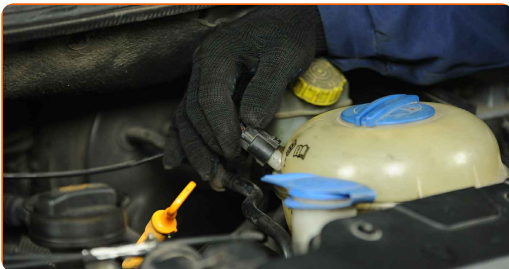

23 Install the engine cover.



24

Reinstall the engine cover clips.




25

Prime the fuel system.

26

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

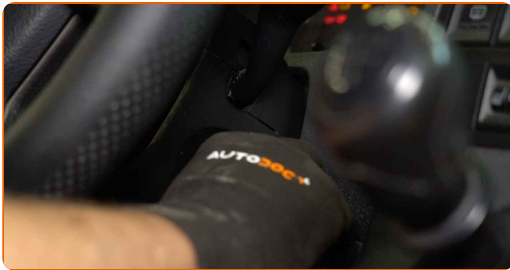


27

Shut off the engine.

28

Remove the fender protection cover.

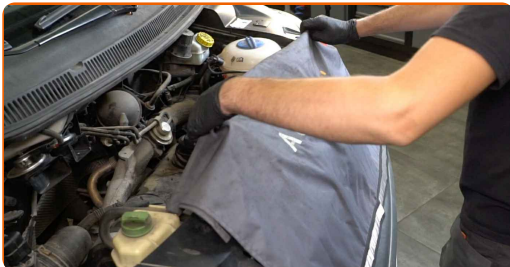

29

Close the hood.



Replacement: fuel filter – VW Multivan T5. Tip from AUTODOC experts:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC+

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW MULTIVAN T5

FUEL FILTER FOR VW: BUY NOW

**FUEL FILTER FOR VW MULTIVAN T5: THE BEST DEALS &
OFFERS**

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.