




How to change
windscreen wiper arm on
a car – replacement
tutorial

VIDEO TUTORIAL



REQUIRED TOOLS:

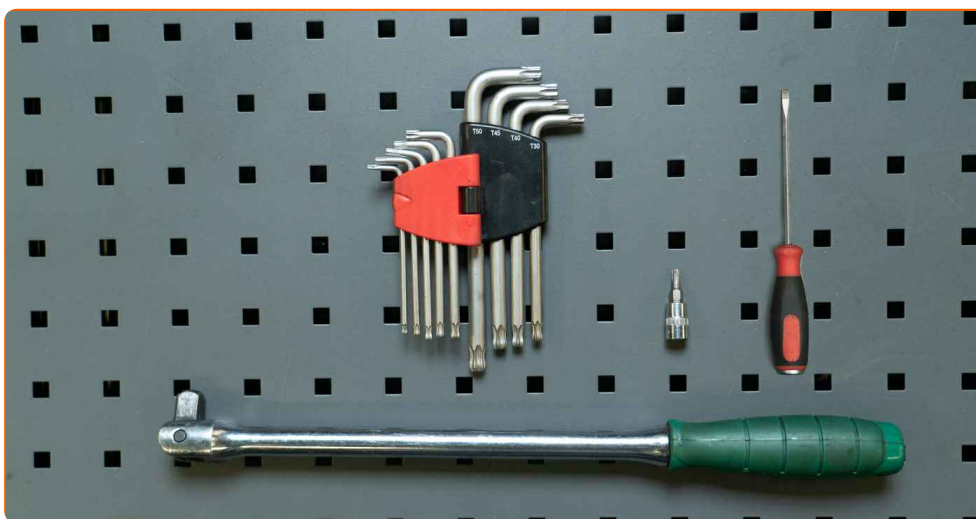

- Flat screwdriver
- Torx wrench
- Tap wrench
- Torx bit

BUY TOOLS

AUTODOC recommends:

- Replace the wiper arms if they squeak when used
- or the wiper blades aren't pressed against the glass properly

1

The procedure for replacing the front arms and the rear one is almost identical



2

The rear wiper arm tends to fail more quickly



Reasons to replace the rear wiper arm:

- a cracked plastic part
- corrosion damage to the bushing

3

Look at the design of the parts and the type of fasteners

Reasons for replacing the front wiper arms:

- a weakened spring that presses the arm against the glass
- corrosion marks and other defects
- installation of a new wiper linkage

4

Unclip the protection cap and remove it



5


Clean the fasteners and unscrew them with a suitable tool



Important!

- Hold the arm firmly to avoid damaging the pivot shaft


6 On some vehicles, the pivot shaft has a built-in washer spray nozzle. Avoid damaging it when removing the arm

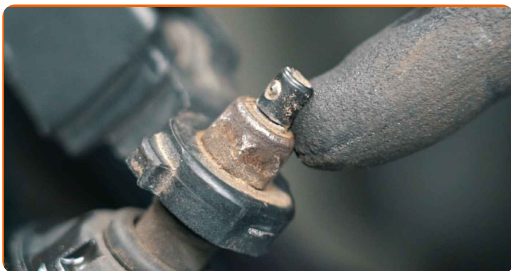


7 Remove the arm from the pivot shaft




8 If it's difficult to remove, use a universal puller

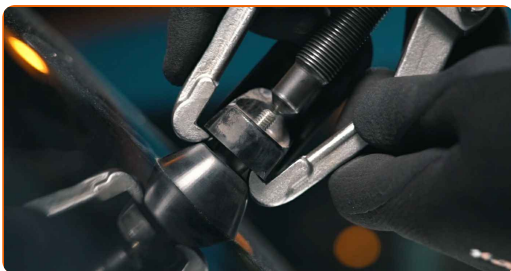

9 Position the puller jaws between the base of the arm and its mount

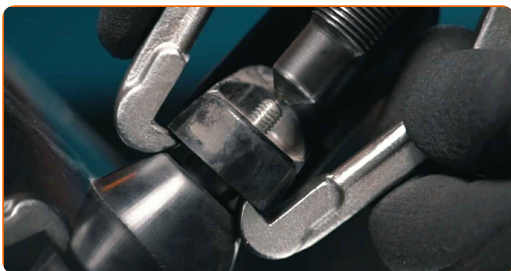


10 Resting the tool against the pivot shaft, detach the arm

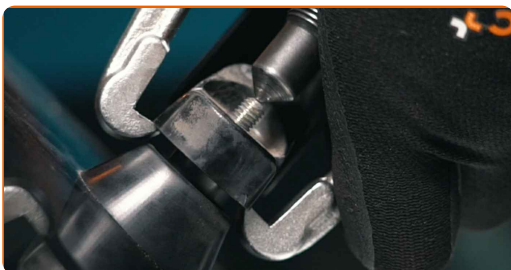

Please note!

- Be careful not to damage the glass!

11 Lift the wiper arm away from the glass

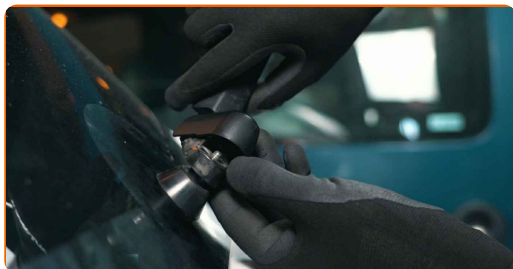


12 Pull the arm and rock it up and down to remove it



13 If it's difficult to remove, use a universal puller


14 Remove the arm from the pivot shaft

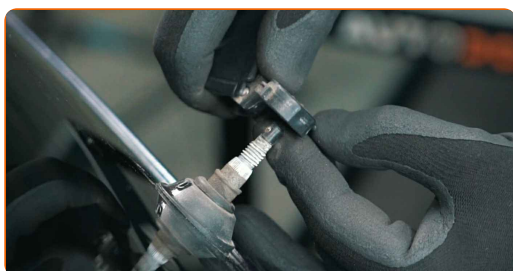

AUTODOC recommends:

- It will be easier to remove if grease was used at the installation stage

15 Clean the wiper arm pivot shaft

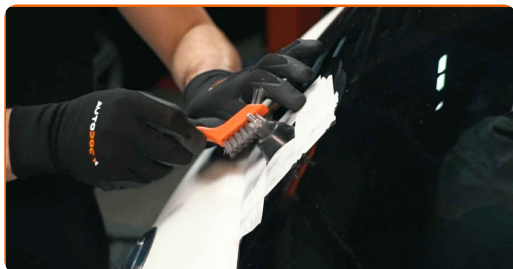

AUTODOC recommends:

- Before doing that, protect the area around it with masking tape

16 Apply some grease to the pivot shaft



17 Install a new arm on the shaft



Please note!

- Use a new fastener

18

Tighten the wiper arm fastener to the torque recommended by the manufacturer




Important!

- Hold the arm firmly to avoid damaging the pivot shaft

19

Install new wiper blades

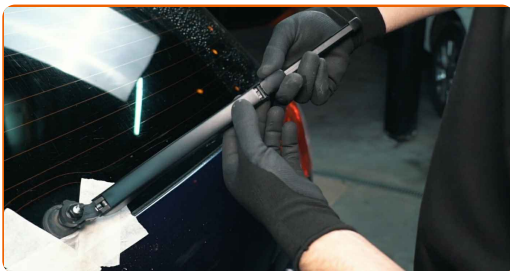

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

WINDSCREEN WIPER ARM: A WIDE SELECTION

(i) DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.