- AUTODOC CLUB

How to change air filter on NISSAN Micra C+C III (K12) – replacement guide



SIMILAR VIDEO TUTORIAL




This video shows the replacement procedure of a similar car part on another vehicle

(i) Important!

This replacement procedure can be used for: NISSAN Micra C+C III (K12) 1.4 16V

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: NISSAN MICRA III (K12) 1.4 16V

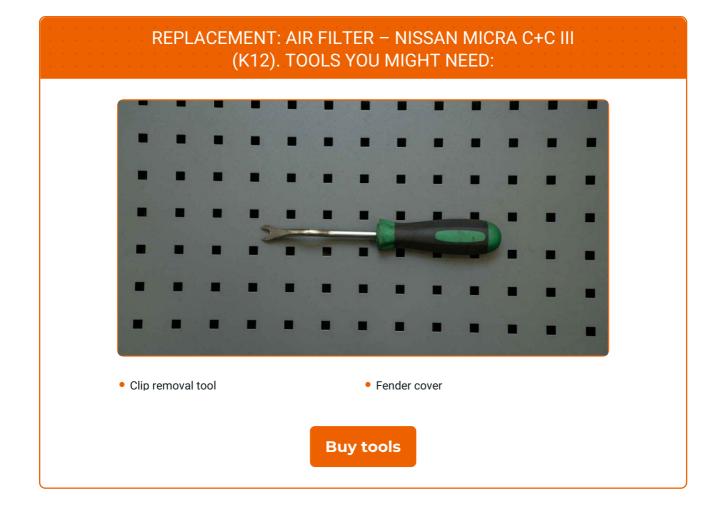

4

Ø

+ AUTODOC CLUB



Replacement: air filter – NISSAN Micra C+C III (K12). AUTODOC experts recommend:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- All work should be done with the engine stopped.

REPLACEMENT: AIR FILTER – NISSAN MICRA C+C III (K12). RECOMMENDED SEQUENCE OF STEPS:



Open the bonnet.

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



Disconnect the fastener of the air intake hose. Use a clip removal tool.



4

Remove the air intake hose.





5

Release the air filter housing retainers.



Replacement: air filter - NISSAN Micra C+C III (K12). Tip:

• The air filter housing is built into the engine cover.



Detach the air filter housing.



7

Remove the filter element from the filter housing.



8

Clean the air filter housing.



+ AUTODOC CLUB





Insert a new filter element into the filter housing.



10

Install the air filter housing.



11

Lock the air filter housing retainers.



12

Install the air intake hose and secure it.



13

Remove the fender protection cover.



Close the bonnet.




VIEW MORE TUTORIALS

f

Ø



AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

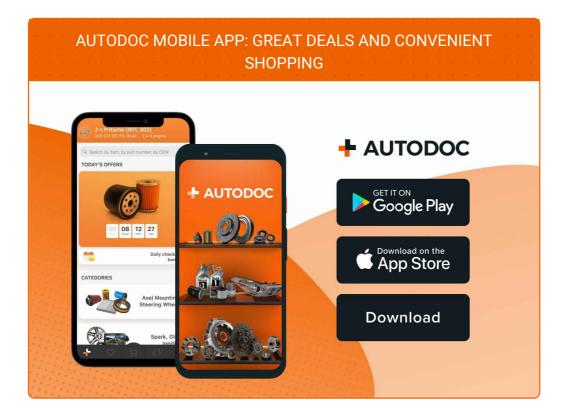

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

AIR FILTER: A WIDE SELECTION

(i) **DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.