

# How to change rear light on **OPEL Corsa D Van** (S07) – replacement guide





## SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle


## (i) Important!

This replacement procedure can be used for: OPEL Corsa D Van (S07) 1.3 CDTI (L08), OPEL Corsa D Van (S07) 1.0 (L08), OPEL Corsa D Van (S07) 1.2 (L08), OPEL Corsa D Van (S07) 1.6 (L08), OPEL Corsa D Van (S07) 1.4 (L08), OPEL Corsa D Van (S07) 1.7 CDTI (L08)

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: OPEL Corsa D Hatchback (S07) 1.3 CDTI (L08, L68)



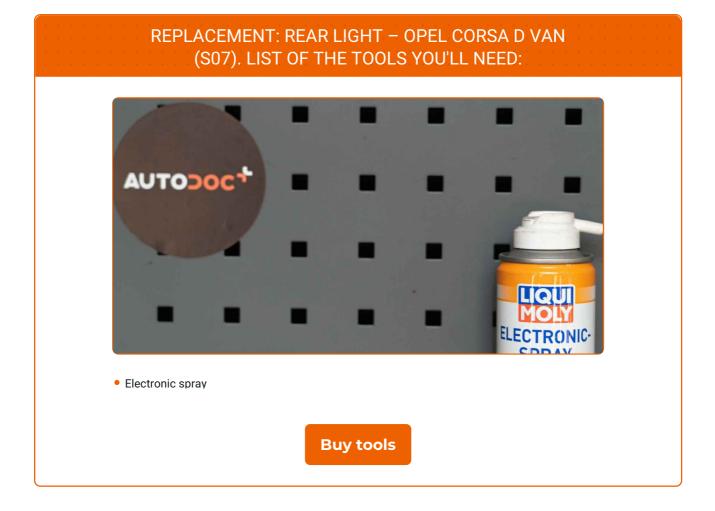

O

f





#### Replacement: rear light – OPEL Corsa D Van (S07). Tip from AUTODOC:

- Replace both rear lights at the same time.
- The replacement procedure is identical for the right and left rear lights.
- All work should be done with the engine stopped.

# REPLACEMENT: REAR LIGHT – OPEL CORSA D VAN (S07). RECOMMENDED SEQUENCE OF STEPS:



Open the boot lid.



Detach the parcel shelf.



3

Remove the clips of the boot side lining.



4

Detach the boot side lining.







Remove the rear light access cover.



6

Disconnect the wiring harness from the rear light.



7

Unscrew the fasteners connecting the rear light to the car body.



8

Remove the rear light.



#### AUTODOC recommends:

 Replacement: rear light – OPEL Corsa D Van (S07). Do not use excessive force when removing the part as this may damage it.





10

Remove the bulb holder together with the bulbs.



### AUTODOC recommends:

- Do not apply excessive force when removing the part. Otherwise you may damage it.
- Avoid touching the bulb glass. The finger marks left on it may cause failure.

Install the bulb holder together with the bulbs.



## Replacement: rear light – OPEL Corsa D Van (S07). Professionals recommend:

- When installing, do not use excessive force to avoid damage to the part.
- Avoid touching the bulb glass. The finger marks left on it may cause failure.





Install the new rear light.



## AUTODOC recommends:

• Replacement: rear light – OPEL Corsa D Van (S07). To avoid damaging the part during installation, do not use excessive force.

12

Screw in the fasteners connecting the rear light to the car body.



13

Treat the connectors of the rear light cluster. Use dielectric grease.



14

Reconnect the wiring harness to the rear light.







Switch on the ignition. This is necessary in order to make sure that the component operates properly.



#### 16

#### Switch off the ignition.



17

Install the rear light access cover.



18

Attach the side lining of the boot.



19

Install the clips of the boot side lining.







Reinstall the parcel shelf.



21

Close the lid of the luggage compartment.




**VIEW MORE TUTORIALS** 





# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

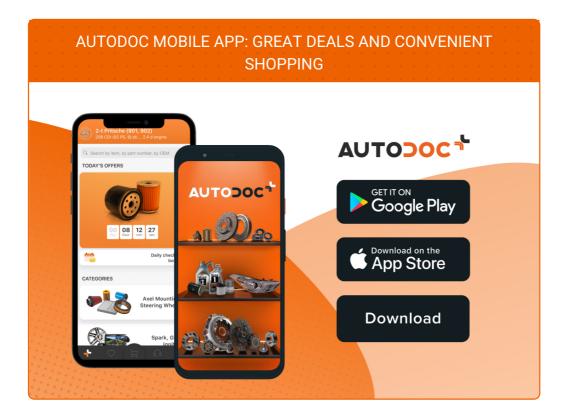

## A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

#### **REAR LIGHT: A WIDE SELECTION**

# (i) **DISCLAIMER**:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.