



How to change front ABS
sensor on **OPEL Vivaro A**
Platform / Chassis (X83)
– replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!


This replacement procedure can be used for:

OPEL Vivaro A Platform / Chassis (X83) 1.9 Di, OPEL Vivaro A Platform / Chassis (X83) 2.5 DTi, OPEL Vivaro A Platform / Chassis (X83) 2.0 CDTI, OPEL Vivaro A Platform / Chassis (X83) 2.0 ECOTEC, OPEL Vivaro A Platform / Chassis (X83) 2.5 CDTI, OPEL Vivaro A Platform / Chassis (X83) 1.9 DTI

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: OPEL Vivaro A Combi (X83) 2.5 CDTI (F7, J7, A07)

REPLACEMENT: ABS SENSOR – OPEL VIVARO A PLATFORM / CHASSIS (X83). TOOLS YOU MIGHT NEED:

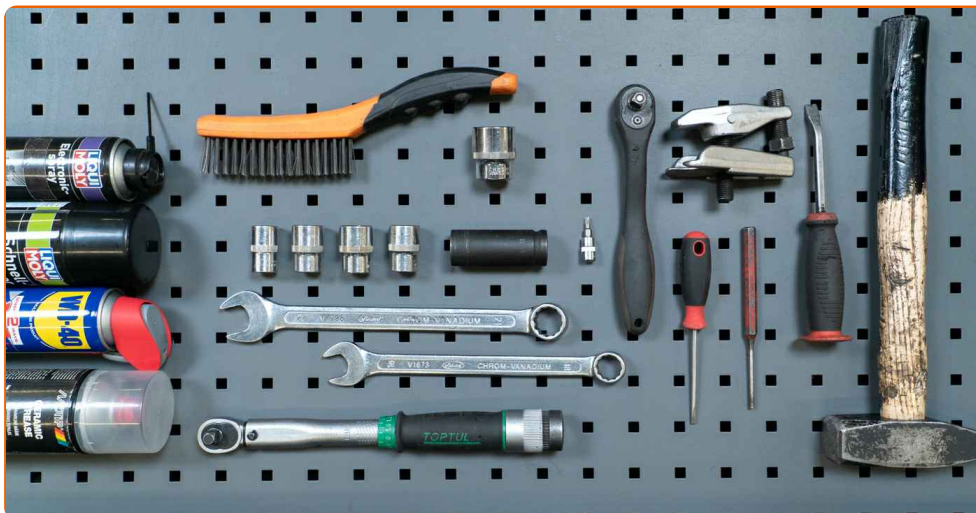

- Wire brush
- WD-40 spray
- All-purpose cleaning spray
- Electronic spray
- Ceramic grease
- Torque wrench
- 18 mm combination spanner
- 21 mm combination spanner
- 16 mm socket
- 18 mm socket
- 19 mm socket
- 21 mm socket
- 32 mm socket
- T40 Torx bit
- 19 mm wheel impact socket
- Ratchet wrench or power tool for removal/installation of threaded fasteners
- Tommy bar
- Hydraulic press
- Bush and bearing driver set
- Bearing separator
- Ball joint separator
- Transmission jack or a second vehicle jack
- Slotted screwdriver
- Pin punch
- Hammer
- Car lift or jack with jack stands, and wheel chocks

[Buy tools](#)

Replacement: ABS sensor – OPEL Vivaro A Platform / Chassis (X83).
AUTODOC recommends:

- All the work should be carried out with the engine switched off.

REPLACEMENT: ABS SENSOR – OPEL VIVARO A PLATFORM / CHASSIS (X83). RECOMMENDED SEQUENCE OF STEPS:

1 Secure the wheels with chocks.

2 Loosen the wheel fasteners. Use a 19 mm wheel impact socket. Use a tommy bar.



3 Raise the vehicle.

Warning!

- If you are using a jack, make sure the car is parked on a hard, flat surface.
- Make sure to additionally secure the car with jack stands.

4

Unscrew the wheel fasteners.



Replacement: ABS sensor – OPEL Vivaro A Platform / Chassis (X83).
Professionals recommend:

- To avoid injury, hold up the wheel when unscrewing the fasteners.

5

Remove the wheel.




6

Remove the ABS sensor.




7

Detach the ABS sensor wiring.

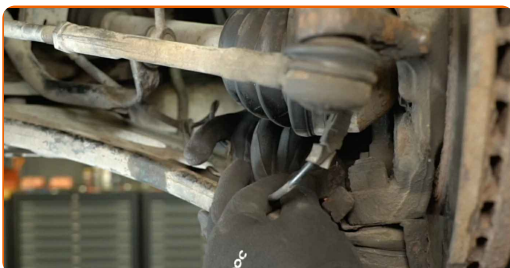


- 8 Detach the vehicle connector from the ABS sensor connector.

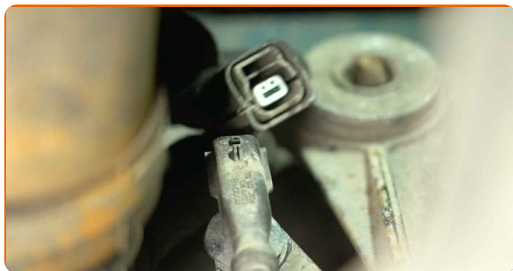


- 9 Remove the ABS sensor connector from its mounting seat on the vehicle. Use a slotted screwdriver.




- 10 Treat the vehicle connector of the ABS sensor. Use an electronic spray.

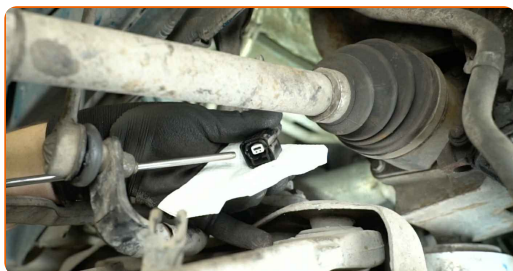

- 11 Secure the ABS sensor connector in its mounting seat on the vehicle.

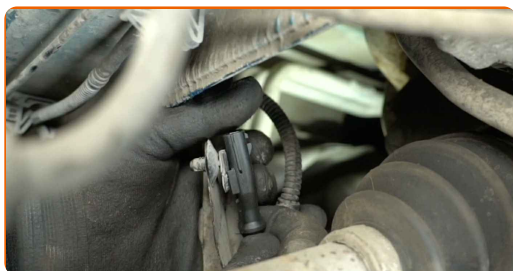

- 12 Attach the vehicle connector to the ABS sensor connector.

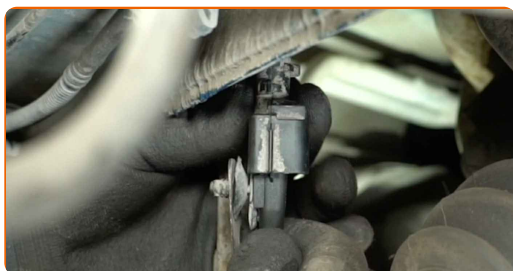


13

Secure the ABS sensor wiring.

**14**

Install the ABS sensor.

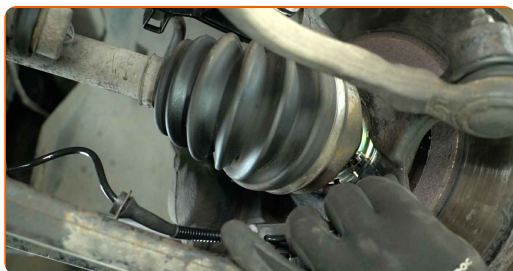**15**

Clean the wheel rim mounting seat. Use a wire brush. Use an all-purpose cleaning spray.

**16**

Treat the brake disc surface that contacts the wheel rim. Use ceramic grease.

**17**

Install the wheel.



Replacement: ABS sensor – OPEL Vivaro A Platform / Chassis (X83). Tip from AUTODOC:

- To avoid injury, hold up the wheel when screwing in the fasteners.


18

Screw in the wheel fasteners. Use a 19 mm wheel impact socket. Use a ratchet wrench.



19

Lower the car and tighten the wheel fasteners in a criss-cross pattern. Use a 19 mm wheel impact socket. Use a torque wrench. Tightening torque: 142 N·m.

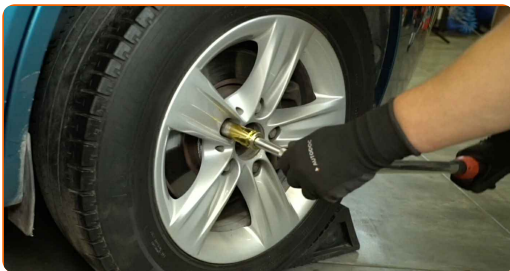

20

Remove the jack, jack stands, and wheel chocks.



WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

ABS SENSOR: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2025 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.