# + AUTODOC CLUB

How to change front antiroll bar links on **Peugeot 206 CC 2D** – replacement guide







### **VIDEO TUTORIAL**



## (i) Important!

This replacement procedure can be used for:

PEUGEOT 208 I Hatchback (CA\_, CC\_) 1.6, PEUGEOT 208 I Hatchback (CA\_, CC\_) 1.4 HDi, PEUGEOT 208 I Hatchback (CA\_, CC\_) 1.6 HDi, PEUGEOT 206+ Hatchback (2L, 2M) 1.4 i, PEUGEOT 206 Hatchback (2A/C) 1.1 i, PEUGEOT 206 Hatchback (2A/C) 1.4 i, PEUGEOT 206 Hatchback (2A/C) 1.6 i, PEUGEOT 206 Hatchback (2A/C) 1.9 D, PEUGEOT 206 Hatchback (2A/C) 1.4 LPG, PEUGEOT 206 Hatchback (2A/C) 2.0 S16, PEUGEOT 206 Van 1.4 HDi, PEUGEOT 206 Van 1.9 D, PEUGEOT 206 Hatchback (2A/C) 2.0 HDI 90, PEUGEOT 206 Hatchback (2A/C) 1.6 16V, (+ 44)

The steps may slightly vary depending on the car design.


CLUB.AUTODOC.CO.UK 1-10







## REPLACEMENT: ANTI ROLL BAR LINKS – PEUGEOT 206 CC 2D. TOOLS YOU'LL NEED:

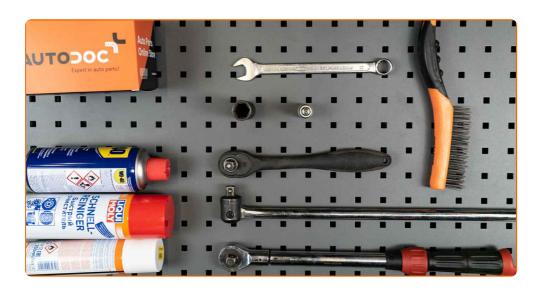

- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Combination spanner #17

- Torx bit T30
- Wheel impact socket #19
- Ratchet wrench
- Torque wrench
- Wheel chock

**BUY TOOLS** 

CLUB.AUTODOC.CO.UK 2-10







#### **AUTODOC** recommends:

- Replace the stabiliser links on Peugeot 206 CC 2D in pairs.
- The replacement procedure is identical for both stabiliser links on the same axle.
- All work should be done with the engine stopped.

## REPLACEMENT: ANTI ROLL BAR LINKS – PEUGEOT 206 CC 2D. RECOMMENDED SEQUENCE OF STEPS:

Secure the wheels with chocks.



Loosen the wheel mounting bolts. Use wheel impact socket #19.



Raise the front of the car and secure on supports.



CLUB.AUTODOC.CO.UK 3-10







4 Unscrew the wheel bolts.



### **AUTODOC** recommends:

Important! Hold the wheel while unscrewing the fastening bolts. Peugeot 206 CC
2D

Remove the wheel.

6



Clean the stabiliser link fasteners. Use a wire brush. Use WD-40 spray.



CLUB.AUTODOC.CO.UK 4-10








Unscrew the fastener connecting the stabilizer link to the stabilizer bar. Use a combination spanner #17. Use Torx T30. Use a ratchet wrench.



Unscrew the fastener connecting the stabilizer link to the shock strut. Use a combination spanner #17. Use Torx T30. Use a ratchet wrench.

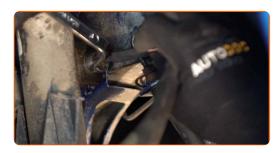

9 Remove the stabilizer rod.



Replacement: anti roll bar links – Peugeot 206 CC 2D. AUTODOC experts recommend:

• Examine stabiliser bushes. Replace them if needed.

CLUB.AUTODOC.CO.UK 5-10








10 Install a new rod, tighten the fasteners.



Tighten the fastener connecting the stabilizer link to the shock strut. Use a combination spanner #17. Use Torx T30. Use a torque wrench. Tighten it to 35 Nm torque.



Tighten the fastener connecting the stabilizer link to the stabilizer bar. Use a combination spanner #17. Use Torx T30. Use a torque wrench. Tighten it to 35 Nm torque.

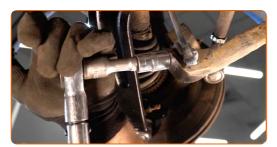

Treat all joints of the stabiliser link. Use copper grease.



13

CLUB.AUTODOC.CO.UK 6-10







Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



Clean the brake disk surface. Use a brake cleaner.



#### **AUTODOC** recommends:

 Replacement: anti roll bar links – Peugeot 206 CC 2D. After applying the spray, wait a few minutes.

16 Install the wheel.



#### AUTODOC recommends:

 Peugeot 206 CC 2D – To avoid injury, hold the shock absorber while screwing in the fastening bolts.

CLUB.AUTODOC.CO.UK 7-10







Screw in the wheel bolts. Use wheel impact socket #19.



Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #19. Use a torque wrench. Tighten it to 100 Nm torque.



19 Remove the jacks and chocks.






**VIEW MORE TUTORIALS** 

CLUB.AUTODOC.CO.UK 8-10





## AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

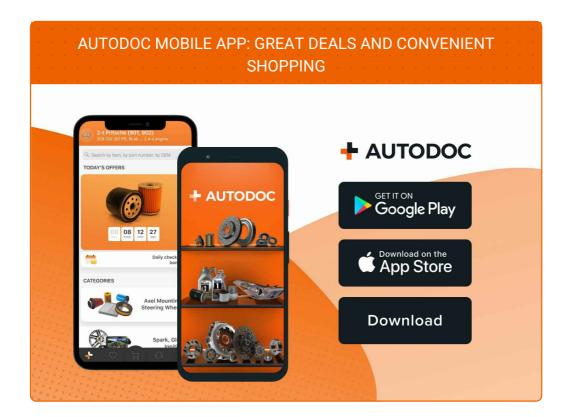

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

**BUY SPARE PARTS FOR PEUGEOT** 

**ANTI ROLL BAR LINKS: A WIDE SELECTION** 

CLUB.AUTODOC.CO.UK 9-10







#### **CHOOSE CAR PARTS FOR PEUGEOT 206 CC 2D**

ANTI ROLL BAR LINKS FOR PEUGEOT: BUY NOW

ANTI ROLL BAR LINKS FOR PEUGEOT 206 CC 2: THE BEST DEALS & OFFERS

### **① DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.

CLUB.AUTODOC.CO.UK 10-10