



How to change air filter
on **VW Polo 6N1** –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

VW Golf III Hatchback (1H1) 1.4, VW Golf III Hatchback (1H1) 1.6, VW Vento (1H2) 1.4, VW Vento (1H2) 1.6, VW Golf III Estate (1H5) 1.4, VW Polo III Hatchback (6N1) 1.3, VW Polo III Hatchback (6N1) 1.6, VW Polo III Hatchback (6N1) 1.0, VW Polo III Hatchback (6N1) 1.4, VW Polo III Classic (6V2) 1.6, VW Polo III Classic (6V2) 1.4, VW Caddy II Van (9K9A) 60 1.4, VW Caddy II Van (9K9A) 75 1.6, VW Lupo / Lupo 3L (6X1, 6E1) 1.0, VW Polo III Variant (6V5) 1.4, (+ 6)

The steps may slightly vary depending on the car design.

REPLACEMENT: AIR FILTER – VW POLO 6N1. TOOLS
YOU MIGHT NEED:



- All-purpose cleaning spray
- Phillips Screwdriver
- Microfibre towel
- Fender cover

BUY TOOLS

Replacement: air filter – VW Polo 6N1. Tip from AUTODOC experts:

- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- Please note: all work on the car – VW Polo 6N1 – should be done with the engine switched off.

1

Open the hood.



2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.




3

Unscrew the air filter housing fasteners. Use a Phillips screwdriver.



4

Remove the air filter housing.

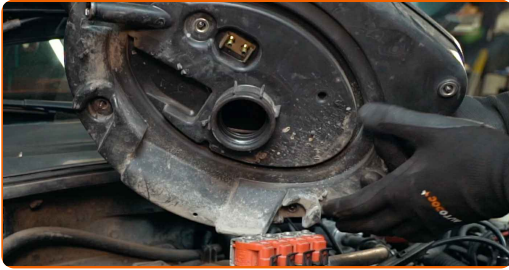

5

Cover the throttle body with a microfibre towel to prevent dust and dirt from getting into the system.

6

Take off the filter lid.



AUTODOC recommends:

- Replacement: air filter – VW Polo 6N1. Do not use excessive force when removing the part as this may damage it.

7

Remove the filter element from the filter housing.



8

Clean the air filter cover and housing. Use all-purpose cleaning spray.




Replacement: air filter – VW Polo 6N1. Tip from AUTODOC:

- Before cleaning the air filter cover and housing, cover the air duct parts, mass airflow sensor (if available), throttle valve with a clean cloth.

9

Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

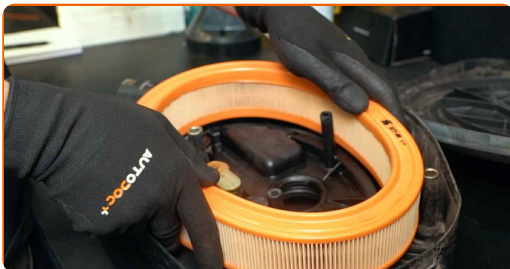


Replacement: air filter – VW Polo 6N1. AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.
- Take care to only use quality filters.
- During installation, make sure to prevent dust and dirt from getting into the air filter housing.

10

Reinstall the air filter cover. Fasten it.

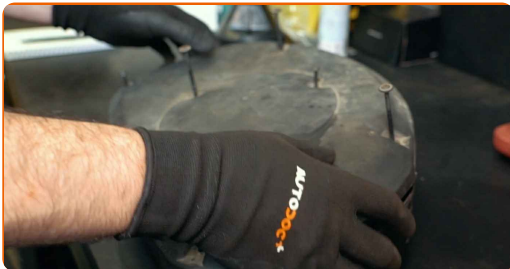

AUTODOC recommends:


- Replacement: air filter – VW Polo 6N1. Do not use excessive force during installation. This may damage the part.

11

Remove the microfibre towel from the throttle body.


12

Install the air filter housing and fasten it. Use a Phillips screwdriver.

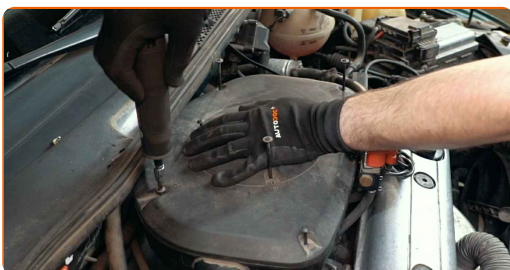

13

Remove the fender protection cover.

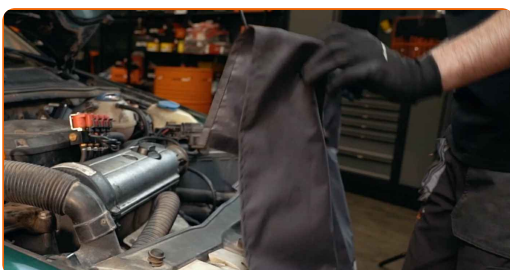

14

Close the hood.



WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC+

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

AIR FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW POLO 6N1

AIR FILTER FOR VW: BUY NOW

AIR FILTER FOR VW POLO 6N1: THE BEST DEALS & OFFERS

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.