



How to change pollen
filter on **Toyota RAV4 II** –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 4.0 V6 VVT-i (GRJ150_, GRJ125_), TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 3.0 D-4D (KDJ155_, KDJ150_), TOYOTA AURIS (NRE15_, ZZE15_, ADE15_, ZRE15_, NDE15_) 1.8 (ZRE152_), TOYOTA RAV 4 III (ACA3_, ACE_, ALA3_, GSA3_, ZSA3_) 2.4 4WD (ACR38), TOYOTA Yaris Hatchback (_P9_) 1.33 VVT-i (NSP90_), TOYOTA COROLLA (ZZE12_, NDE12_, ZDE12_) 1.8 VVTL-i TS (ZZE123_), TOYOTA LAND CRUISER 150 (KDJ15_, GRJ15_) 4.0 V6 VVTi (GRJ150_), TOYOTA Yaris Hatchback (_P1_) 1.0 (SCP10_), TOYOTA FORTUNER Closed Off-Road Vehicle (TGN6_, KUN6_, GGN6_, TGN5_ 3.0 D 4WD, TOYOTA Yaris Verso (_P2_) 1.3, TOYOTA AVENSIS Saloon (ZRT27, ADT27) 2.0 D-4D (ADT270_), TOYOTA AVENSIS Estate (ZRT27, ADT27) 2.0 D-4D (ADT270_), TOYOTA Yaris Hatchback (_P1_) 1.3 (NCP10_, SCP12_), TOYOTA RAV 4 II (CLA2_, XA2_, ZCA2_, ACA2_) 1.8 (ZCA25_, ZCA26_), TOYOTA Yaris Verso (_P2_) 1.5, (+ 61)

The steps may slightly vary depending on the car design.

Replacement: pollen filter – Toyota RAV4 II. AUTODOC recommends:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- Please note: all work on the car – Toyota RAV4 II – should be done with the engine switched off.

CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the glove box.




2 Press on the side walls of the glove box to release the stoppers.




3 Remove the glove box.




4 Press the pollen filter retaining clips to release them.

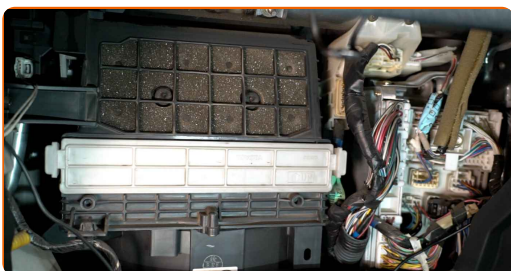

5 Remove the cabin filter housing.

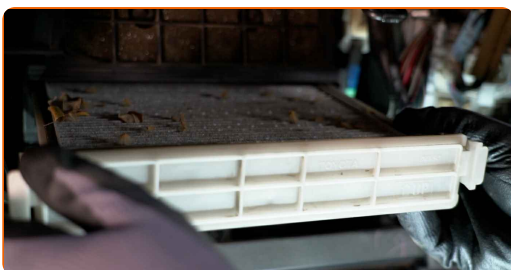


6 Remove the cabin filter.

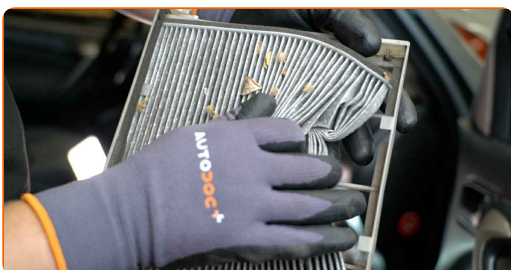

Replacement: pollen filter – Toyota RAV4 II. Tip from AUTODOC:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.


7 Insert a new filter element into the filter housing.

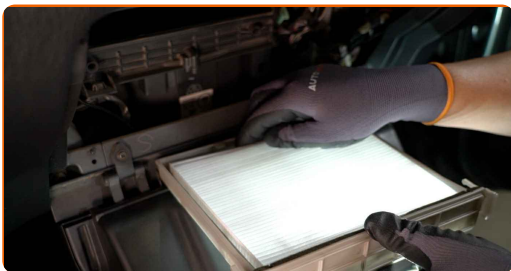

AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.
- Attention! Use quality filters – Toyota RAV4 II.

8 Install the cabin filter housing.

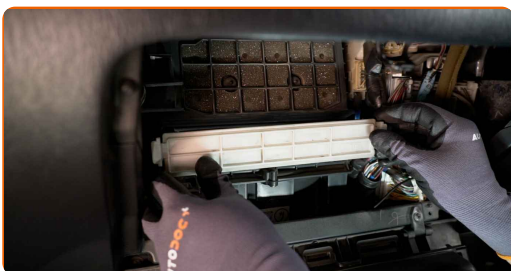

AUTODOC recommends:

- Follow the air flow direction arrow on the filter.

9 Install the glove box.



10

Press on the side walls of the glove box to reinstall the stoppers.



11

Close the glove box.



12

Switch on the ignition.



13

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.



14

Switch off the ignition.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON  **Google Play**

 **Download on the App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR TOYOTA

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR TOYOTA RAV4 II

POLLEN FILTER FOR TOYOTA: BUY NOW

POLLEN FILTER FOR TOYOTA RAV4 II: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.