



How to change front  
wiper motor on  
**RENAULT Clio III**  
**Grandtour** – replacement  
guide

## SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

### Important!

This replacement procedure can be used for:

RENAULT Clio III Grandtour 1.2 16V, RENAULT Clio III Grandtour 1.6 16V, RENAULT Clio III Grandtour 1.5 dCi, RENAULT Clio III Grandtour 1.2 16V Hi-Flex, RENAULT Clio III Grandtour 1.4 16V

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: RENAULT Clio III Hatchback (BR0/1, CR0/1) 1.5 dCi

**REPLACEMENT: WIPER MOTOR – RENAULT CLIO III  
GRANDTOUR. TOOLS YOU NEED:**



- Wire brush
- WD-40 spray
- Copper grease
- Torque wrench
- Combination spanner #13
- Drive socket # 10
- Drive socket # 16
- Torx bit T30
- Ratchet wrench
- 3-Arm Gear Puller
- Clip removal tool
- Fender cover

**Buy tools**

Replacement: wiper motor – RENAULT Clio III Grandtour. AUTODOC recommends:


- All work should be done with the engine stopped.

## REPLACEMENT: WIPER MOTOR – RENAULT CLIO III GRANDTOUR. RECOMMENDED SEQUENCE OF STEPS:

**1** Open the bonnet.

**2** Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

**3** Remove the windscreen wiper arm nut covers. Use a clip removal tool.

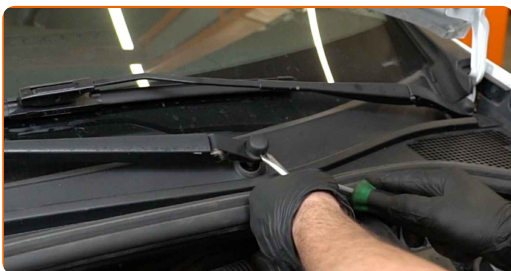


**4** Clean the fasteners of the wiper arms. Use a wire brush. Use WD-40 spray.




**5** Unscrew the fasteners of the windscreen wiper arms. Use a drive socket #16. Use a ratchet wrench.



**6** Remove the wiper arms.

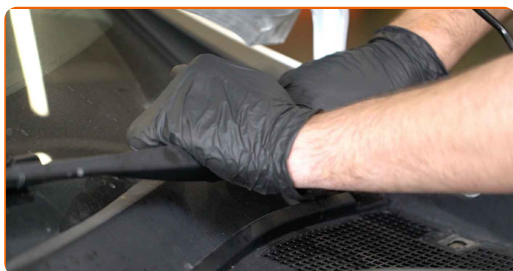

**7** Remove the cowl grille seal.

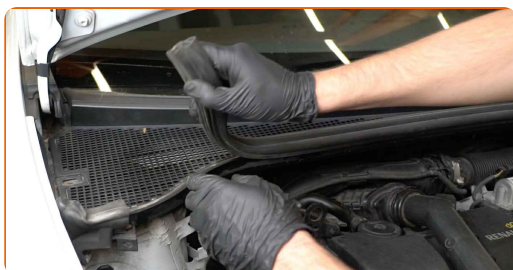


**8** Remove the cowl grille clips. Use a clip removal tool.


**9** Raise up and remove the cowl grille.




**10** Remove the wiper linkage cover. Use a clip removal tool.

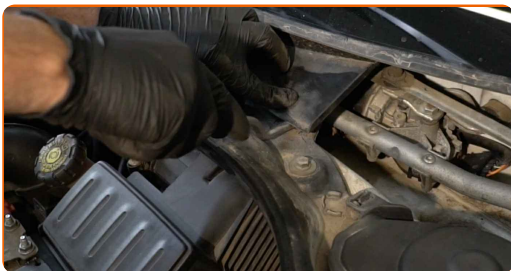


**11** Clean the wiper linkage fasteners. Use WD-40 spray.

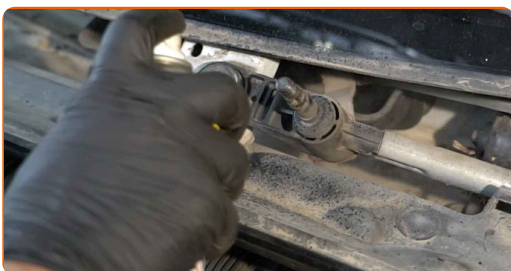


**12** Unscrew the wiper linkage fasteners. Use a drive socket #10. Use a ratchet wrench.

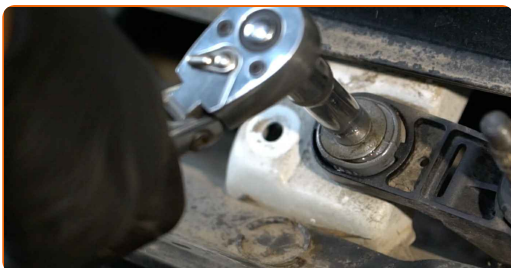


**13** Unplug the wiper motor connector.

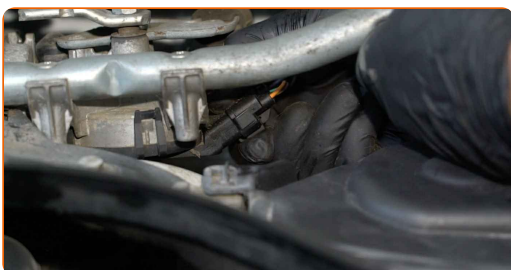


**14** Remove the wiper linkage.

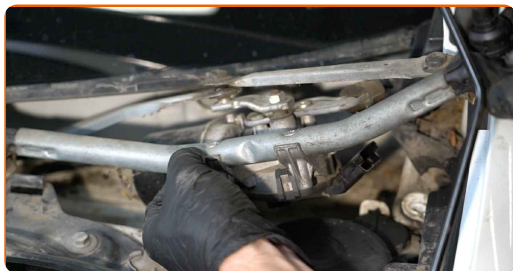


**15** Clean the wiper motor fasteners. Use WD-40 spray.

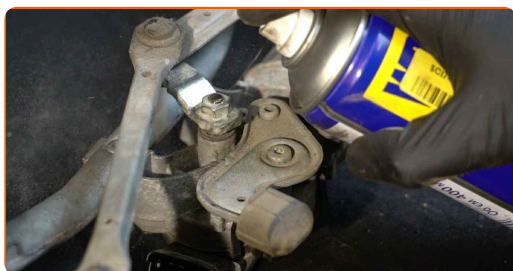

**16** Unscrew the wiper motor fasteners. Use a combination spanner #13.

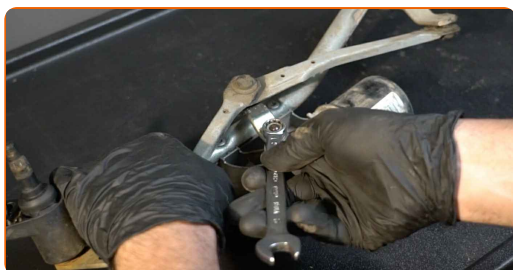


**17** Detach the wiper motor. Use 3-Arm Gear Puller.

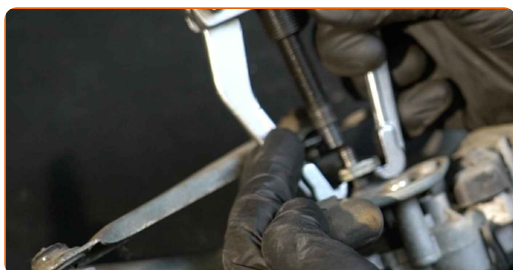





**18** Clean the wiper motor fasteners. Use a wire brush. Use WD-40 spray.

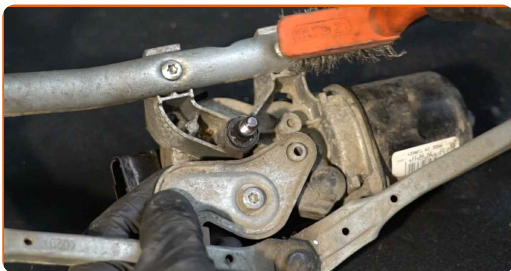

**19** Unscrew the wiper motor fasteners. Use Torx T30. Use a ratchet wrench.

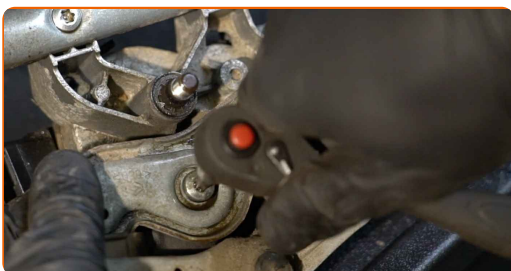

**20** Remove the wiper motor.

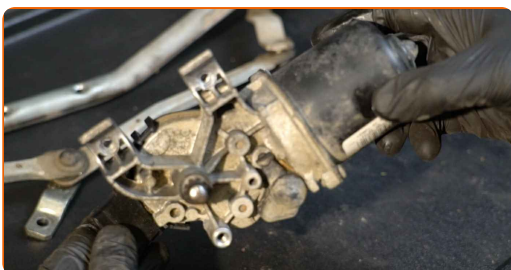

**21** Install the new wiper motor.







**22** Screw in the wiper motor fasteners. Use Torx T30. Use a ratchet wrench.



**23** Attach the wiper motor.

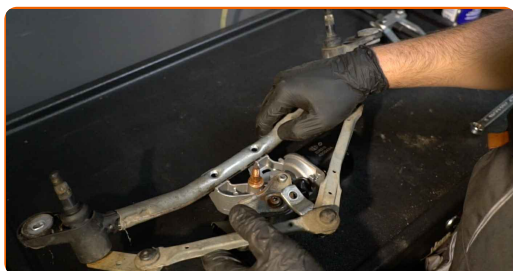

**24** Screw in the wiper motor fasteners. Use a combination spanner #13.

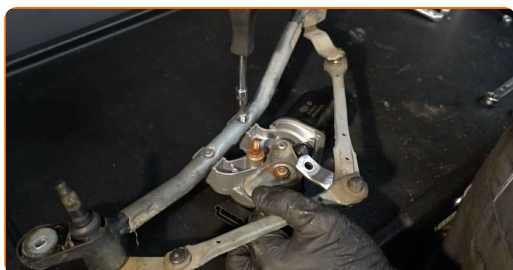


**25** Tighten the wiper motor fasteners. Use Torx T30. Use a torque wrench. Tighten it to 24 Nm torque.




**26** Clean the mounting seat of the wiper linkage. Use WD-40 spray.




**27** Plug in the wiper motor connector.

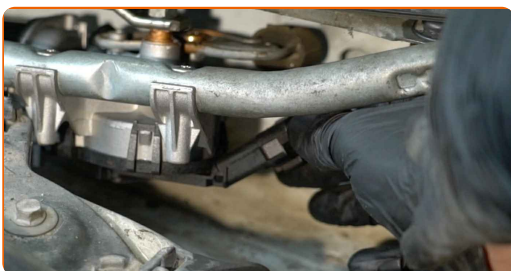

**28** Install the wiper linkage.

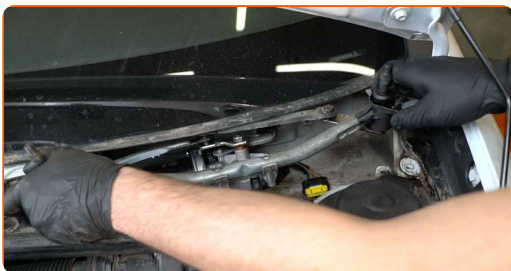


**29** Screw in the wiper linkage fasteners. Use a drive socket #10. Use a ratchet wrench.

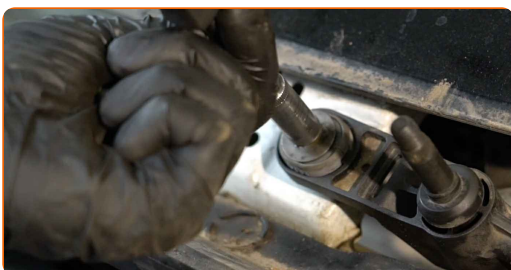

**30** Tighten the wiper linkage fasteners. Use a drive socket #10. Use a torque wrench. Tighten it to 22 Nm torque.



**31** Install the wiper linkage cover.

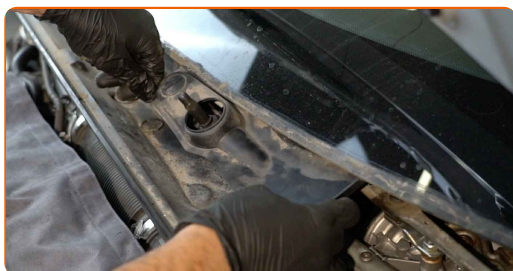

**32** Install and secure the cowl grille.



**33** Install the cowl grille clips.

**34** Install the cowl grille seal.



**35** Treat the pivots of the windscreen wiper arms. Use copper grease.



**36** Reinstall the wiper arms.




Replacement: wiper motor – RENAULT Clio III Grandtour. Tip from AUTODOC experts:

- Make sure not to mix up the wiper arms on the driver's and passenger's sides.

**37** Tighten the fasteners of the wiper arms. Use a drive socket #16. Use a torque wrench. Tighten it to 29 Nm torque.



38 Install the nut covers of the windscreen wiper arms.

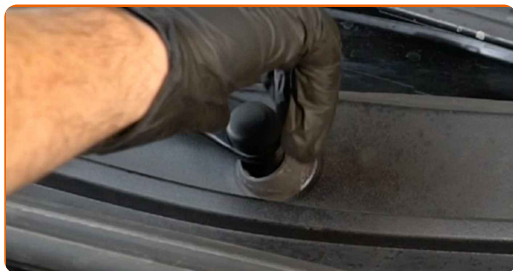

39 Remove the fender protection cover.

40 Close the hood.

41 Switch on the ignition. This is necessary in order to make sure that the component operates properly.

42 Switch off the ignition.

**WELL DONE!** 

[VIEW MORE TUTORIALS](#)

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

 Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**WIPER MOTOR: A WIDE SELECTION**

## **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.