



How to change pollen
filter on **Renault Scenic 2**
– replacement guide

VIDEO TUTORIAL



i Important!

This replacement procedure can be used for:

RENAULT Scénic II (JM) 1.6 Hi-Flex, RENAULT Scénic II (JM) 1.9 dCi, RENAULT Scénic II (JM) 2.0, RENAULT Scénic II (JM) 1.5 dCi, RENAULT Scénic II (JM) 1.6, RENAULT Scénic II (JM) 1.4, RENAULT Grand Scénic II (JM) 1.6, RENAULT Grand Scénic II (JM) 2.0, RENAULT Grand Scénic II (JM) 1.5 dCi, RENAULT Grand Scénic II (JM) 1.9 dCi, RENAULT Scénic II (JM) 2.0 16V Turbo, RENAULT Scénic II (JM) 2.0 dCi, RENAULT Scénic II (JM) 1.6 16V, RENAULT Grand Scénic II (JM) 2.0 dCi, RENAULT Scénic II (JM) 1.9 D, (+ 3)

The steps may slightly vary depending on the car design.

REPLACEMENT: POLLEN FILTER – RENAULT SCENIC 2.
TOOLS YOU MIGHT NEED:



• Round-nose pliers

• Fender cover

BUY TOOLS

Replacement: pollen filter – Renault Scenic 2. Tip from AUTODOC:

- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

REPLACEMENT: POLLEN FILTER – RENAULT SCENIC 2. USE THE FOLLOWING PROCEDURE:


1

Open the bonnet.



2


Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

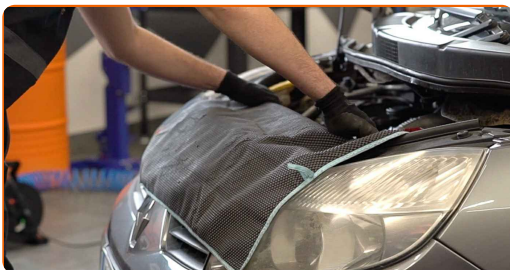

3 Unscrew the fasteners of the cabin filter housing cover.



4 Remove the cabin filter housing cover.

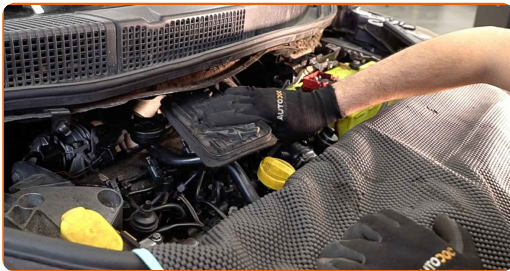

AUTODOC recommends:

- Replacement: pollen filter – Renault Scenic 2. Do not use excessive force when removing the part as this may damage it.

5 Remove the cabin filter. Use round-nose pliers.



Replacement: pollen filter – Renault Scenic 2. Professionals recommend:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.

6

Install the cabin filter to its mounting seat.




AUTODOC recommends:

- Follow the air flow direction arrow on the filter.
- Replacement: pollen filter – Renault Scenic 2. Be sure to position the filtering element correctly. Avoid misalignment.
- Take care to only use quality filters.


7

Reinstall the cabin filter housing cover.

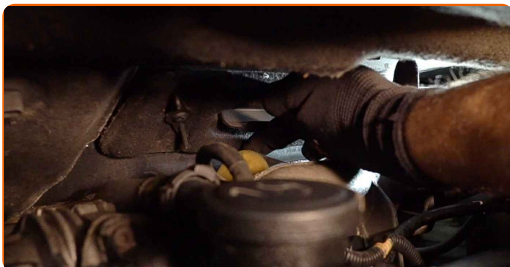

8

Screw in the fasteners of the cabin filter housing cover.

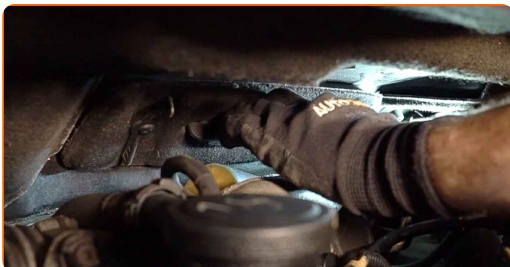

9

Remove the fender protection cover.



10

Close the hood.



11

Switch on the ignition.

12

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

13

Switch off the ignition.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



AUTODOC

GET IT ON
 **Google Play**

Download on the
 **App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR RENAULT

POLLEN FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR RENAULT SCENIC 2

POLLEN FILTER FOR RENAULT: BUY NOW

**POLLEN FILTER FOR RENAULT SCENIC 2: THE BEST DEALS
& OFFERS**

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2021 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.