



How to change fuel filter
on **Renault Scenic 2** –
replacement guide

VIDEO TUTORIAL

** Important!**

This replacement procedure can be used for:

RENAULT Scénic II (JM) 1.6 Hi-Flex, RENAULT Scénic II (JM) 2.0, RENAULT Scénic II (JM) 1.5 dCi, RENAULT Scénic II (JM) 1.6, RENAULT Scénic II (JM) 1.4, RENAULT Grand Scénic II (JM) 1.6, RENAULT Grand Scénic II (JM) 2.0, RENAULT Grand Scénic II (JM) 1.5 dCi, RENAULT Grand Scénic II (JM) 1.9 dCi, RENAULT Scénic II (JM) 2.0 16V Turbo, RENAULT Scénic II (JM) 1.9 dCi, RENAULT Scénic II (JM) 2.0 dCi, RENAULT Scénic II (JM) 1.6 16V, RENAULT Grand Scénic II (JM) 2.0 dCi, RENAULT Scénic II (JM) 1.9 D, (+ 3)

The steps may slightly vary depending on the car design.

**REPLACEMENT: FUEL FILTER – RENAULT SCENIC 2.
LIST OF THE TOOLS YOU'LL NEED:**



- Wire brush
- Copper grease
- Drive socket # 10
- Torx bit T25
- Torx bit T30
- Wheel impact socket #19
- Ratchet wrench
- Torque wrench
- Flat Screwdriver
- Ear clamp pliers
- Fluid container
- Crow bar
- Fender cover
- Wheel chock

BUY TOOLS

Replacement: fuel filter – Renault Scenic 2. Tip:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- All work should be done with the engine stopped.

REPLACEMENT: FUEL FILTER – RENAULT SCENIC 2. USE THE FOLLOWING PROCEDURE:

1

Open the bonnet.




2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.



3


Secure the wheels with chocks.

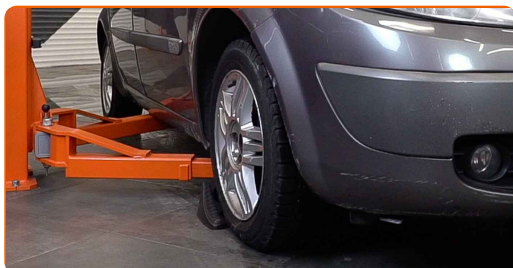


4 Loosen the wheel mounting bolts. Use wheel impact socket #19.



5 Lift the car using a jack or place it over an inspection pit.

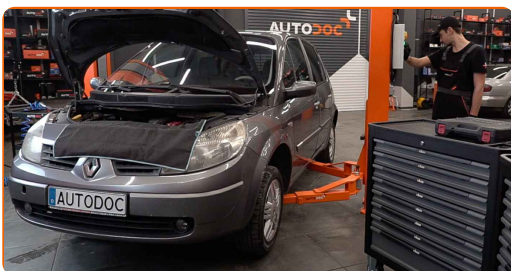

6 Unscrew the wheel bolts.

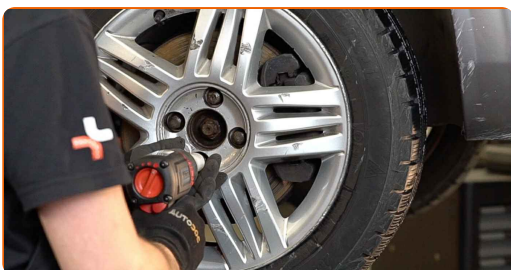


AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.
Renault Scenic 2


7 Remove the wheel.




8 Unscrew and remove the wheel arch cover fasteners. Use ear clamp pliers. Use Torx T25. Use a ratchet wrench.

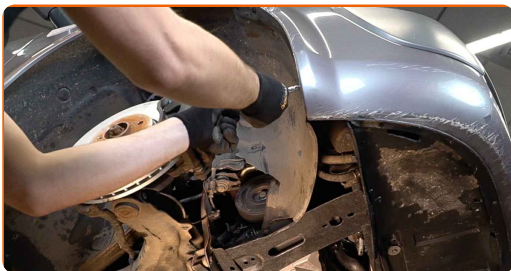


9 Remove the wheel arch cover.

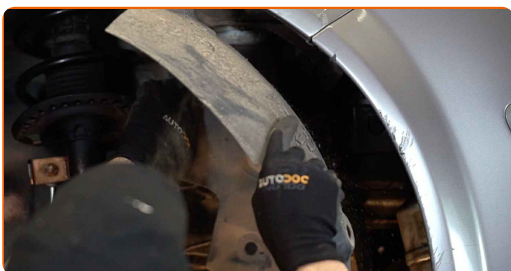


10 Remove the fuel filter. Use a crowbar.

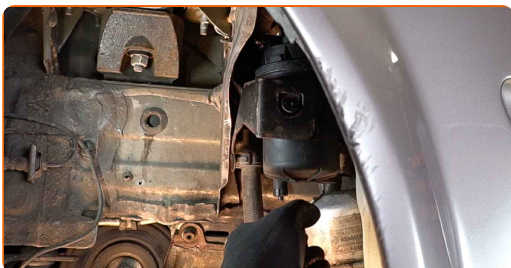


11 Unscrew the fuel filter bracket fixing bolts. Use a drive socket #10. Use a ratchet wrench.

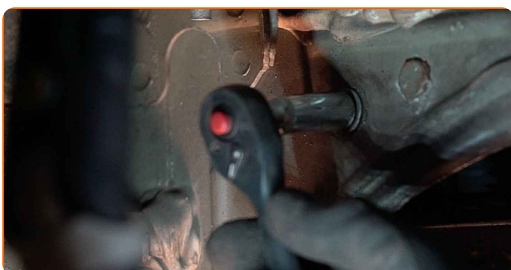


12 Remove the fuel filter fastening bracket.

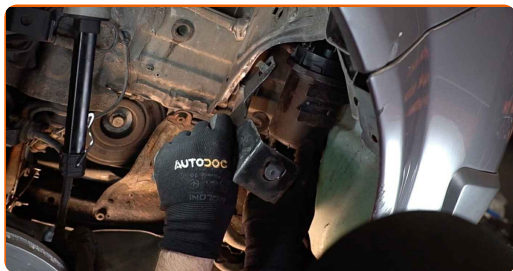


13 Prepare a container for fluids.

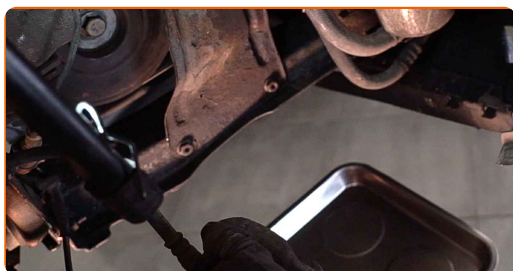


14 Unscrew the fasteners of the fuel filter cover. Use Torx T30. Use a ratchet wrench.

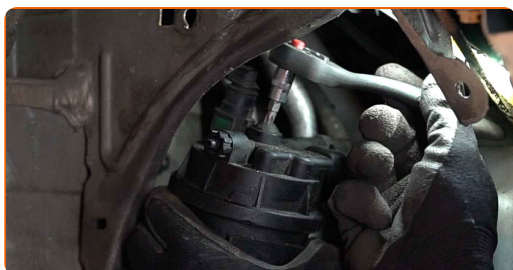

15 Demount the fuel filter housing assembled with an old filter cartridge. Put the old filter cartridge in the container.

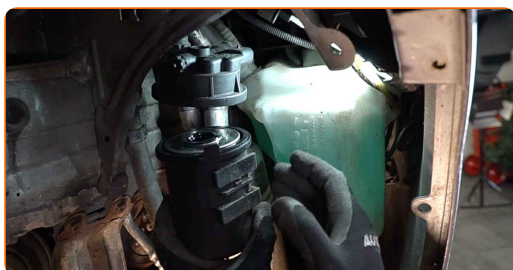


16 Remove the rubber strip.

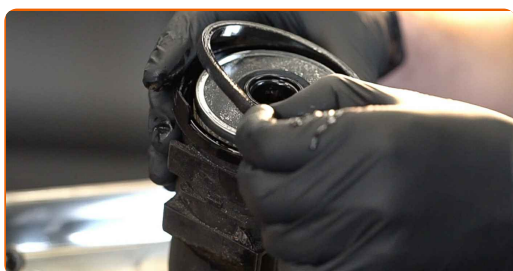

17 Take the fuel filter out of the bracket. Use a flat screwdriver.



18 Fasten the fuel filter in the holder.

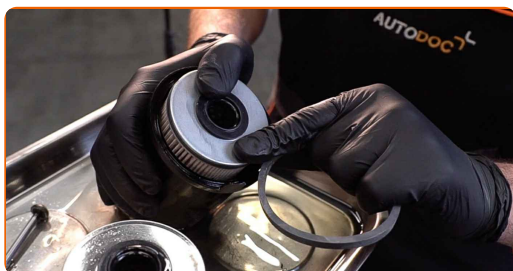


19 Install the rubber strip.




Replacement: fuel filter – Renault Scenic 2. Tip from AUTODOC:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – Renault Scenic 2.

20 Clean the fuel filter housing and the cover.

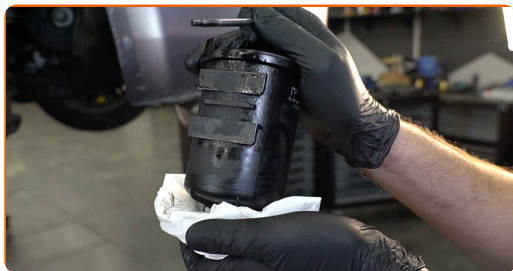


21 Install the fuel filter housing assembled with a new filter cartridge.

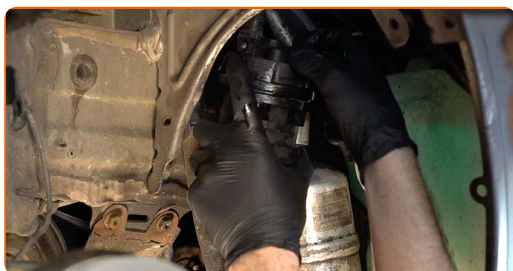

22 Tighten the fasteners of the fuel filter cover. Use Torx T30. Use a torque wrench. Tighten it to 10 nm torque.




23 Install the fuel filter fastening bracket.

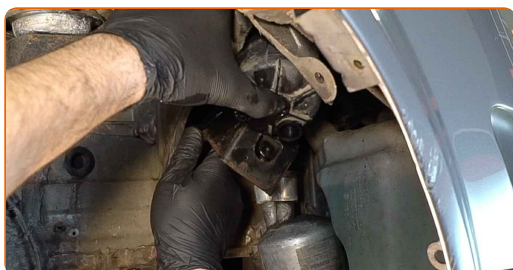


24

Screw the fixing bolts of the fuel filter bracket. Use a drive socket #10. Use a ratchet wrench.

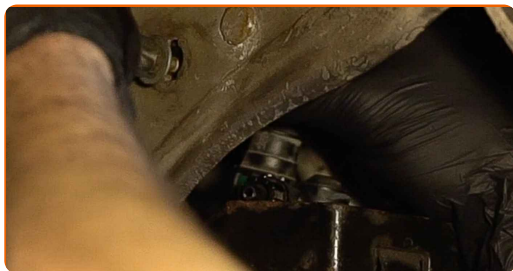

25

Install a new fuel filter.

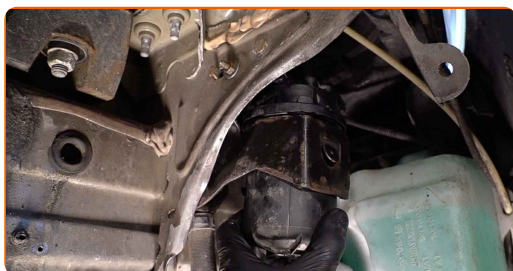


26

Install the wheel arch cover to its mounting seat.



27

Install and tighten the wheel arch cover fasteners. Use Torx T25. Use a ratchet wrench.

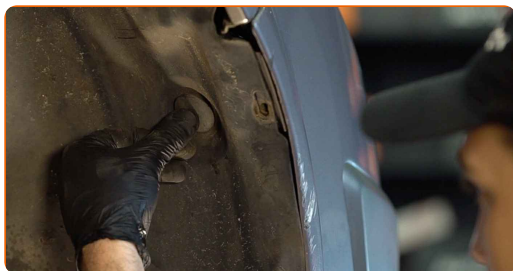


28

Clean the wheel rim mounting seat. Use a wire brush. Treat the contacting surface. Use copper grease.



29

Install the wheel.

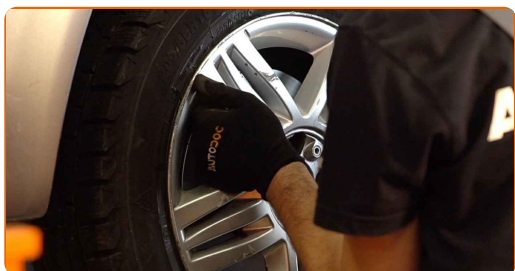


Replacement: fuel filter – Renault Scenic 2. Tip from AUTODOC experts:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

30


Screw in the wheel bolts. Use wheel impact socket #19.

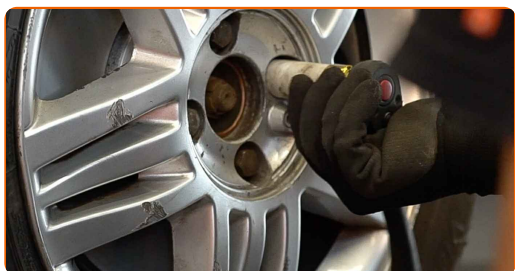

- 31 Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 110 nm torque.




- 32 Press the fuel primer pump several times until it gets hard.

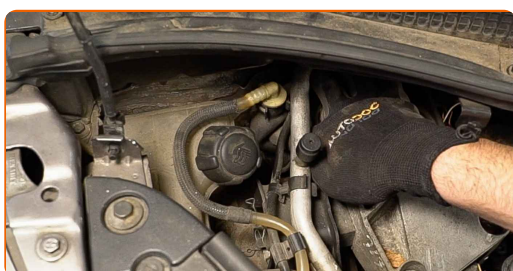


- 33 Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.



- 34 Shut off the engine.

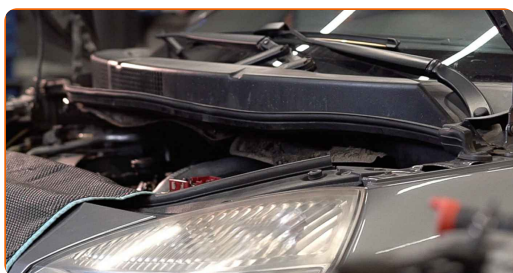

- 35 Remove the fender protection cover.

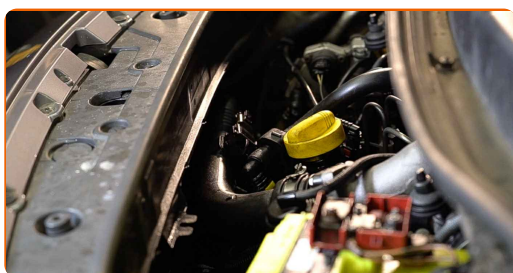

36

Close the hood.



Replacement: fuel filter – Renault Scenic 2. AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

WELL DONE! 

[VIEW MORE TUTORIALS](#)

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR RENAULT

FUEL FILTER: A WIDE SELECTION

CHOOSE CAR PARTS FOR RENAULT SCENIC 2

FUEL FILTER FOR RENAULT: BUY NOW

FUEL FILTER FOR RENAULT SCENIC 2: THE BEST DEALS & OFFERS

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.