



How to change fuel filter
on **SEAT Cordoba Saloon**
(6K1, 6K2) – replacement
guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!


This replacement procedure can be used for:

SEAT Cordoba Saloon (6K1, 6K2) 1.4 i, SEAT Cordoba Saloon (6K1, 6K2) 1.6 i, SEAT Cordoba Saloon (6K1, 6K2) 1.4 i 16V, SEAT Cordoba Saloon (6K1, 6K2) 1.4 16V, SEAT Cordoba Saloon (6K1, 6K2) 1.8 T 20V Cupra

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: SEAT Ibiza III Hatchback (6L) 1.4 16V

REPLACEMENT: FUEL FILTER – SEAT CORDOBA SALOON (6K1, 6K2). LIST OF THE TOOLS YOU'LL NEED:

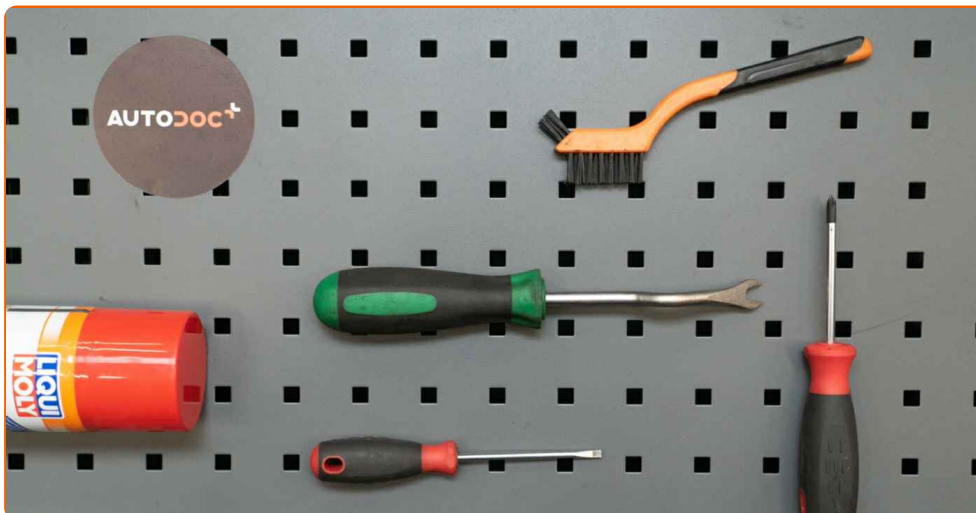

- Nylon cleaning brush
- All-purpose cleaning spray
- Clip removal tool
- Flat Screwdriver
- Phillips screwdriver
- Fluid container

Buy tools

Replacement: fuel filter – SEAT Cordoba Saloon (6K1, 6K2). AUTODOC recommends:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Warning! Shut down the engine before starting any work – SEAT Cordoba Saloon (6K1, 6K2)


CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:

1 Open the fuel door.


2 Unscrew the fuel filler cap.

3 Lift the car using a jack or place it over an inspection pit.


4 Prepare a container for fluids.

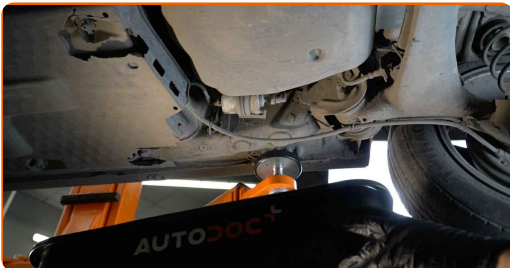

5 Clean the fasteners of the fuel supply lines. Use a nylon cleaning brush. Use all-purpose cleaning spray.

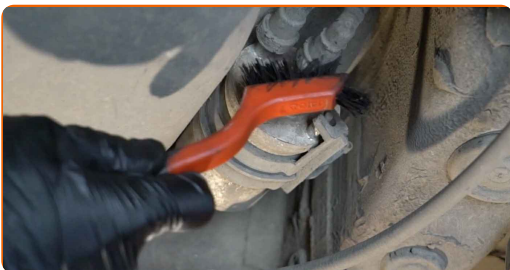


- 6** Squeeze the clips and detach the fuel supply lines from the fuel filter housing. Use a flat screwdriver. Use a clip removal tool.

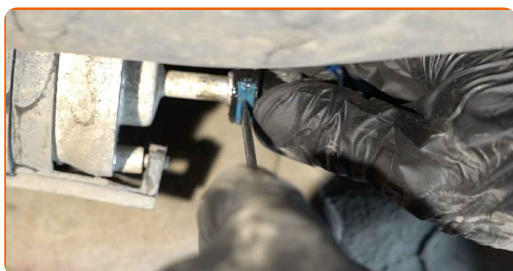


Replacement: fuel filter – SEAT Cordoba Saloon (6K1, 6K2). Tip:

- Be careful! Fuel may leak from the filter housing and hoses.

- 7** Unscrew the fuel filter bracket. Use a Phillips screwdriver.

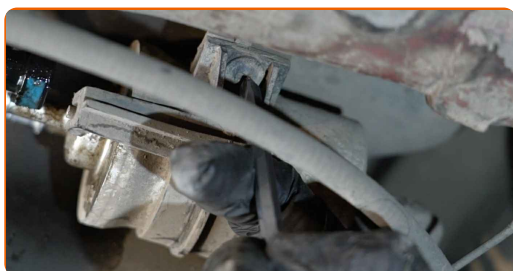

- 8** Remove the fuel filter. Put the old filter cartridge in the container.

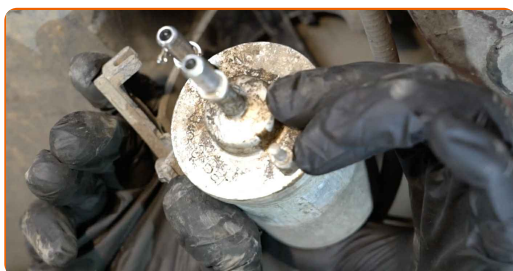

- 9** Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.



10 Install a new fuel filter.




AUTODOC recommends:

- Make sure that the fuel filter is positioned correctly. Consider the fuel flow direction mark.
- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – SEAT Cordoba Saloon (6K1, 6K2).

11 Connect the fuel lines to the fuel filter and lock the fastening clips.




12 Screw in the fuel filter mounting bracket. Use a Phillips screwdriver.

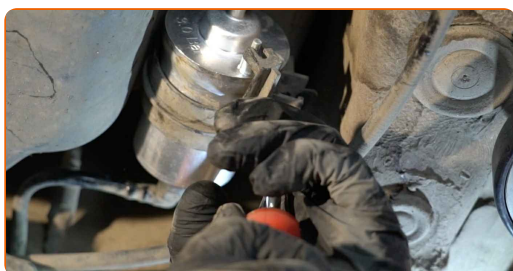

13

Clean the fasteners of the fuel supply lines. Use all-purpose cleaning spray.

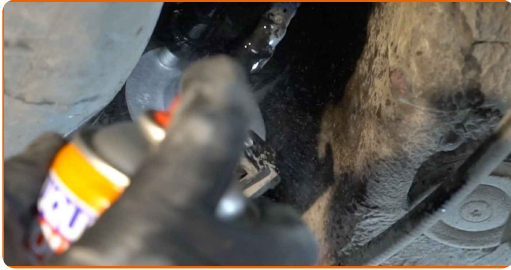

14

Take the fluid container away from under the fuel filter.



15

Lower the car.

16

Tighten the fuel filler cap.

17

Close the fuel door.

Replacement: fuel filter – SEAT Cordoba Saloon (6K1, 6K2). Tip from AUTODOC experts:

- Before starting off, switch the ignition on and off several times. This should be done to activate the fuel pump to make it pump fuel through the fuel system.

18

Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

19

Shut off the engine.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

FUEL FILTER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.