




How to change pollen
filter on **SEAT Exeo ST**
(3R5) – replacement
guide

SIMILAR VIDEO TUTORIAL

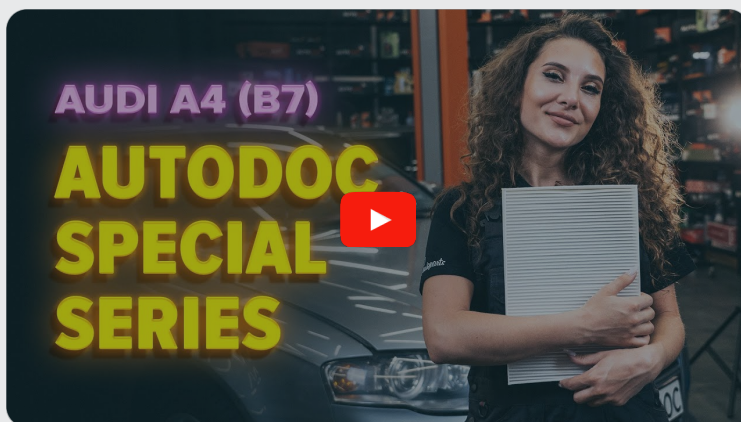

This video shows the replacement procedure of a similar car part on another vehicle

Important!


This replacement procedure can be used for:

SEAT Exeo ST (3R5) 1.6, SEAT Exeo ST (3R5) 1.8 T, SEAT Exeo ST (3R5) 2.0 TFSI,
SEAT Exeo ST (3R5) 2.0 TDI, SEAT Exeo ST (3R5) 1.8 TSI

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: AUDI A4 Saloon (8EC, B7) 2.0 TFSI

REPLACEMENT: POLLEN FILTER – SEAT EXEO ST (3R5). LIST OF THE TOOLS YOU'LL NEED:

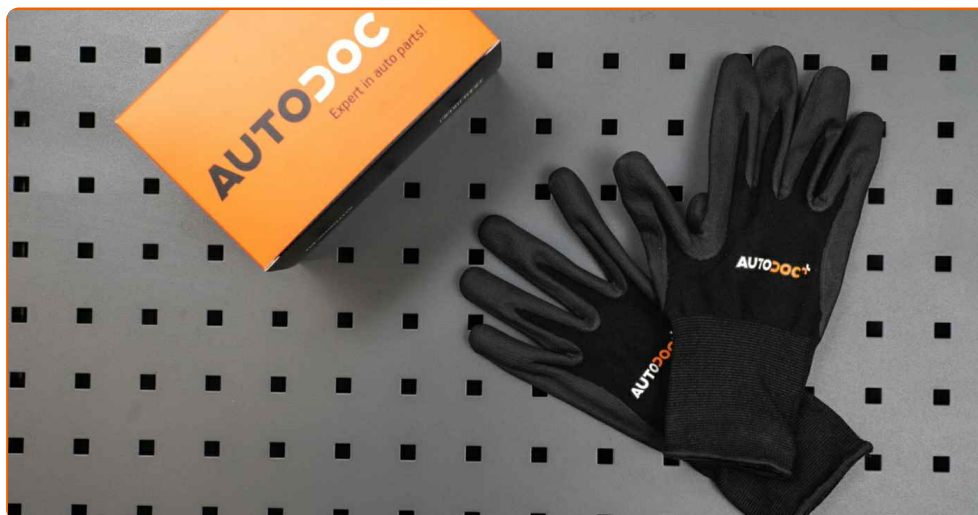

- Fender cover

[Buy tools](#)

Replacement: pollen filter – SEAT Exeo ST (3R5). AUTODOC recommends:


- Replace the cabin filter at least once every six months, in early spring and autumn seasons.
- Follow the terms, recommendations and requirements of the part operation provided by the manufacturer.
- If the air flow into the cabin has sharply reduced, replace the filter before a scheduled maintenance.
- All work should be done with the engine stopped.

**REPLACEMENT: POLLEN FILTER – SEAT EXEO ST (3R5).
RECOMMENDED SEQUENCE OF STEPS:**

1 Open the bonnet.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

3 Remove the protective cover.

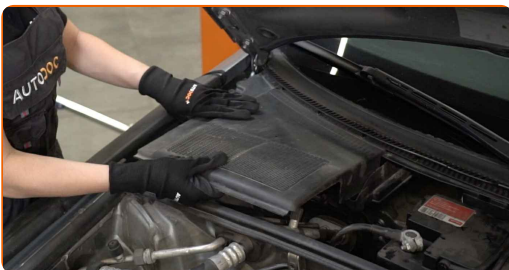

4 Remove the cabin filter housing cover.



5 Remove the filter element from the filter housing.




Replacement: pollen filter – SEAT Exeo ST (3R5). Tip:

- Do not attempt to clean and reuse the filter - it will affect the quality of air cleaning inside the car.


6 Switch on the ignition.

7 Switch on the air recirculation mode.

8 Clean the cabin filter housing and cover.

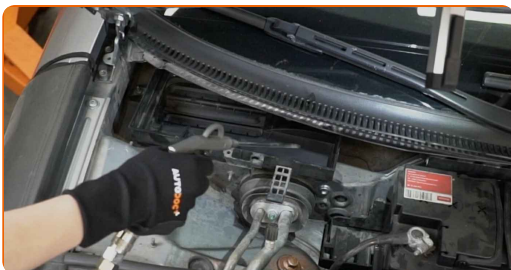

9 Insert a new filter element into the filter housing. Make sure that the filter edge fits tight to the housing.

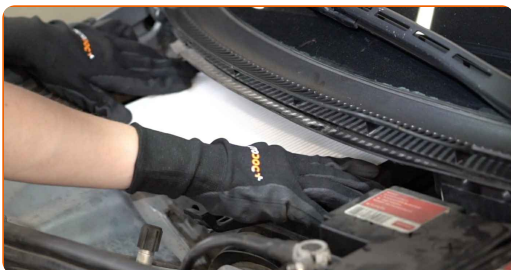


AUTODOC recommends:

- Check out the correct location of the filter element. Do not skew.
- Follow the air flow direction arrow on the filter.
- SEAT Exeo ST (3R5) – It's important to only use high-quality filters.

10

Reinstall the cabin filter housing cover. Make sure you hear a click indicating that it is locked in place.

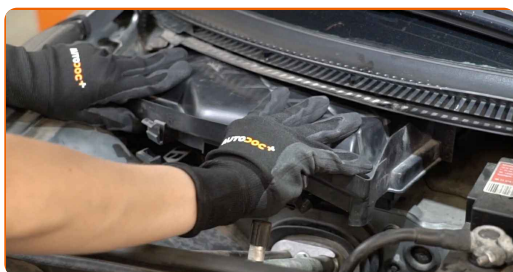

11

Install the protective cover.



12

Switch on the air conditioning system. This is necessary in order to make sure that the component operates properly.

13

Switch off the air recirculation mode.

14

Switch off the ignition.

15

Remove the fender protection cover.

16

Close the hood.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
 **Google Play**

Download on the
 **App Store**

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

POLLEN FILTER: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.