



How to change
serpentine belt on **SEAT**
TOLEDO I (1L) –
replacement guide

SIMILAR VIDEO TUTORIAL



This video shows the replacement procedure of a similar car part on another vehicle

Important!

This replacement procedure can be used for:

SEAT TOLEDO I (1L) 1.6 i, SEAT TOLEDO I (1L) 1.8 16V, SEAT TOLEDO I (1L) 1.9 D,
SEAT TOLEDO I (1L) 2.0 i, SEAT TOLEDO I (1L) 1.8 i, SEAT TOLEDO I (1L) 1.9 TDI

The steps may slightly vary depending on the car design.

This tutorial was created based on the replacement procedure for a similar car part on: VW GOLF III (1H1) 1.9 D

REPLACEMENT: SERPENTINE BELT – SEAT TOLEDO I
(1L). TOOLS YOU'LL NEED:



- Wire brush
- WD-40 spray
- Brake cleaner
- Copper grease
- Torque wrench
- Drive socket # 13
- Drive socket # 16
- Wheel impact socket #17
- Ratchet wrench
- Phillips screwdriver
- Crow bar

Buy tools

Replacement: serpentine belt – SEAT TOLEDO I (1L). Tip:

- All work should be done with the engine stopped.

REPLACEMENT: SERPENTINE BELT – SEAT TOLEDO I (1L). TAKE THE FOLLOWING STEPS:

1 Open the bonnet.

2 Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.


3 Secure the wheels with chocks.

4 Loosen the wheel mounting bolts. Use wheel impact socket #17.



5 Raise the front of the car and secure on supports.


6 Unscrew the wheel bolts.

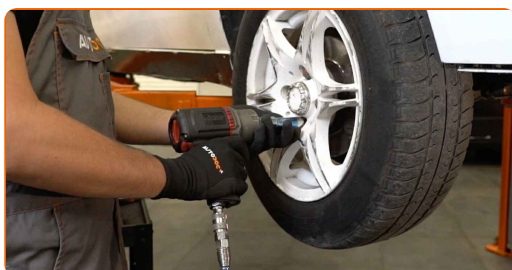


AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while unscrewing the fastening bolts.
SEAT TOLEDO I (1L)


7 Remove the wheel.

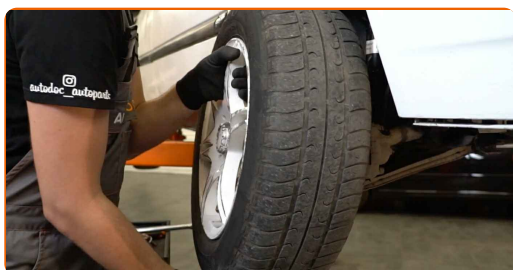


8 Unscrew the wheel arch cover fasteners. Use a Phillips screwdriver.

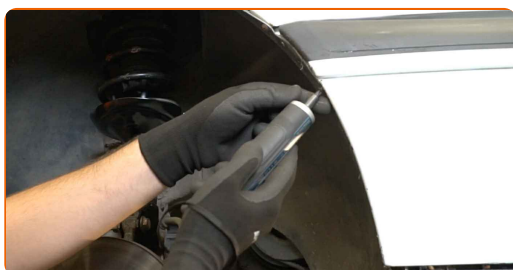

9 Remove the wheel arch cover.

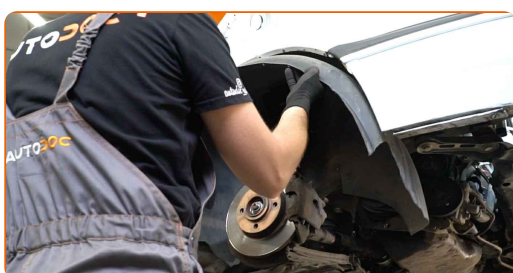


10 Clean the fasteners of the hydraulic power steering pump. Use a wire brush. Use WD-40 spray.

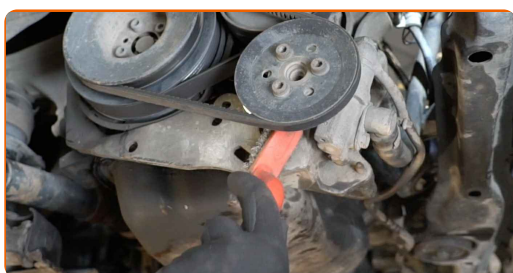


11

Unscrew the fasteners of the hydraulic power steering pump. Use a drive socket #13. Use a drive socket #16. Use a ratchet wrench.

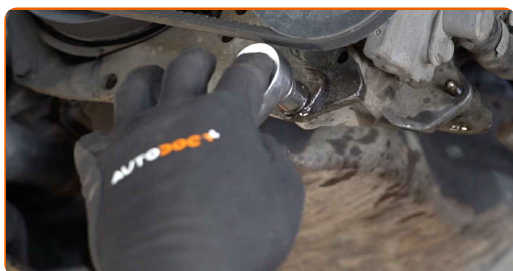

12

Loosen the V belt.

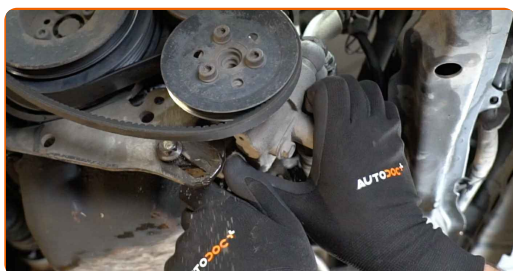


13

Remove the V belt.



14


Clean the alternator fasteners. Use a wire brush. Use WD-40 spray.

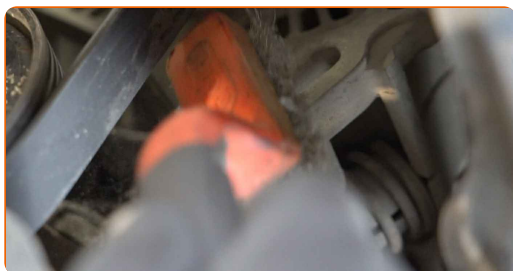


15 Loosen the alternator fasteners. Use a drive socket #13. Use a drive socket #16. Use a ratchet wrench.



16 Remove the V-ribbed belt.

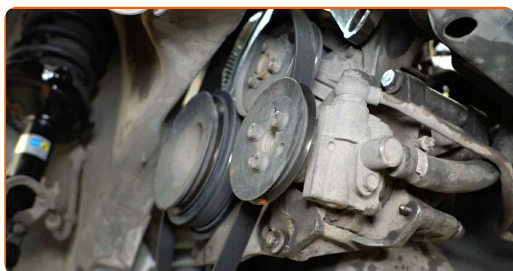


17 Install the V-ribbed belt.

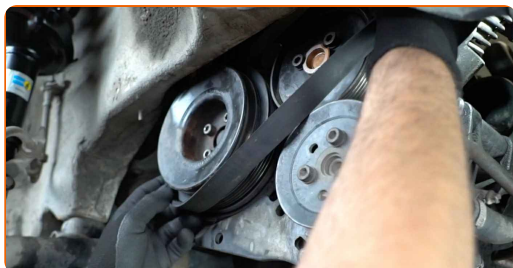

Replacement: serpentine belt – SEAT TOLEDO I (1L). Tip from AUTODOC:

- Make sure that the V-ribbed belt fits all pulleys snugly.

18 Place the V-ribbed belt on the alternator. Use a crowbar.

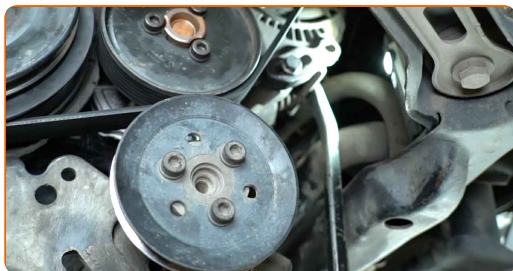

AUTODOC recommends:

- Make sure that the V-ribbed belt is properly tensioned.


19

Install the V belt.



20

Tighten the fasteners of the hydraulic power steering pump. Use a drive socket #13. Use a drive socket #16. Use a torque wrench. Tighten it to 25 Nm torque.

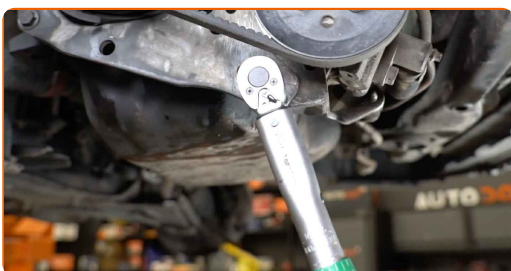

21

Tighten the alternator fasteners. Use a drive socket #13. Use a drive socket #16. Use a torque wrench. Tighten it to 30 Nm torque.




22

Install the wheel arch cover to its mounting seat. Screw in the fasteners. Use a Phillips screwdriver.




23 Clean the wheel rim mounting seat. Use a wire brush.

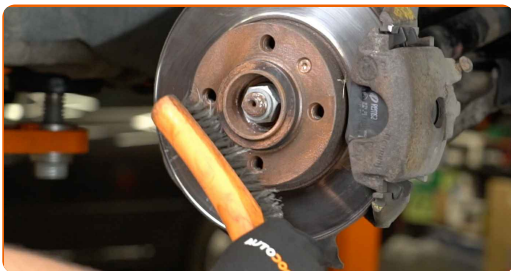

24 Treat the surface where the brake disc contacts the wheel rim. Use copper grease.




25 Clean the brake disk surface. Use a brake cleaner.

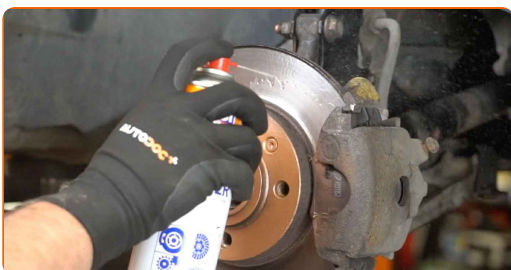

AUTODOC recommends:

- Replacement: serpentine belt – SEAT TOLEDO I (1L). After applying the spray, wait a few minutes.

26 Install the wheel.

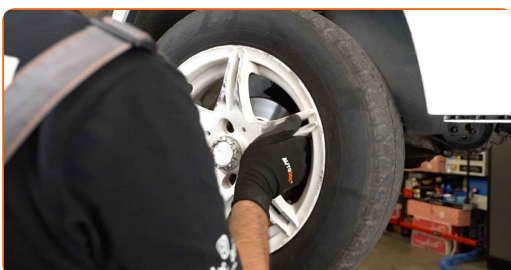


Replacement: serpentine belt – SEAT TOLEDO I (1L). Professionals recommend:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

27

Screw in the wheel bolts. Use wheel impact socket #17.

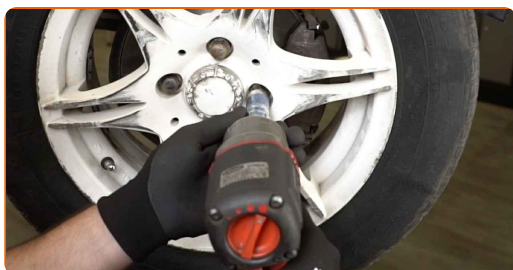


28

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 110 nm torque.



29

Remove the jacks and chocks.

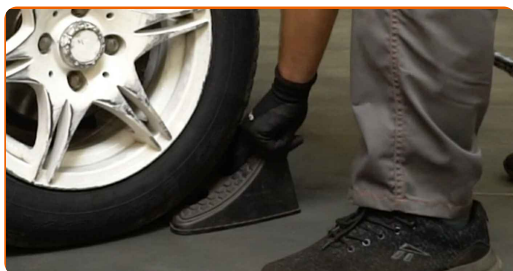

30

Remove the fender protection cover.

31

Close the hood.

WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING



+ AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

SERPENTINE BELT: A WIDE SELECTION

DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.