



How to change fuel filter  
on **VW Sharan 1** –  
replacement guide

## VIDEO TUTORIAL

** Important!**

This replacement procedure can be used for:

VW SHARAN (7M8, 7M9, 7M6) 1.9 TDI, VW SHARAN (7M8, 7M9, 7M6) 2.0 TDI, VW SHARAN (7M8, 7M9, 7M6) 1.9 TDI 4motion, VW Sharan VAN (7M) 1.9 TDI (7M8, 7M9), VW Sharan VAN (7M) 1.9 TDI (7M6, 7M9), VW Sharan VAN (7M) 1.9 TDI (7M9)

The steps may slightly vary depending on the car design.

REPLACEMENT: FUEL FILTER – VW SHARAN 1. LIST OF THE TOOLS YOU'LL NEED:



- All-purpose cleaning spray
- Drive socket # 8
- Ratchet wrench
- Clic-R collar pliers
- Hand-operated fluid syringe
- Fender cover

**BUY TOOLS**

Replacement: fuel filter – VW Sharan 1. AUTODOC experts recommend:

- Ensure adequate ventilation of the workplace. Fuel vapors are poisonous.
- Please note: all work on the car – VW Sharan 1 – should be done with the engine switched off.

## CARRY OUT REPLACEMENT IN THE FOLLOWING ORDER:


1

Open the hood.




2

Use a fender protection cover to prevent damaging paintwork and plastic parts of the car.

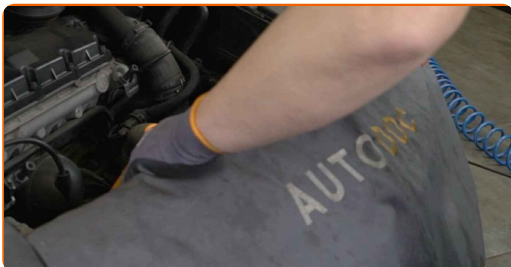


3

Clean the fuel filter. Use all-purpose cleaning spray.

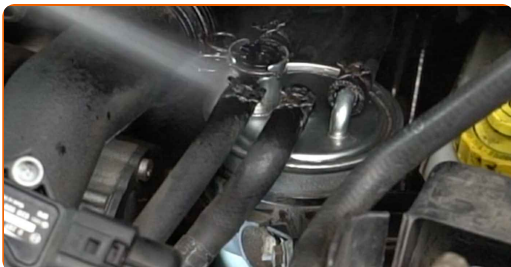

**4** Loosen the fastening clamps of the fuel filter pipes. Use clic-R collar pliers.

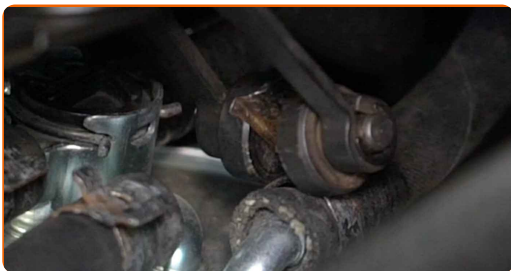

**5** Detach the tubes from the fuel filter.




**Replacement: fuel filter – VW Sharan 1. Tip from AUTODOC experts:**


- Be careful! Fuel may leak from the filter housing and hoses.

**6** Detach the filter from its fasteners.

**7** Remove the retaining clip that secures the fuel filter pipe.

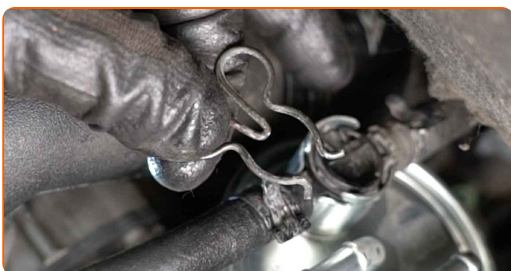

**8** Disconnect the pipe from the fuel filter.

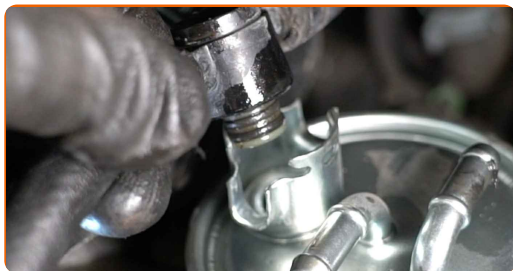


**9** Remove the fuel filter.




**10** Put the old filter cartridge in the container.



**11** Unscrew the bracket fastener. Use a drive socket #8. Use a ratchet wrench.

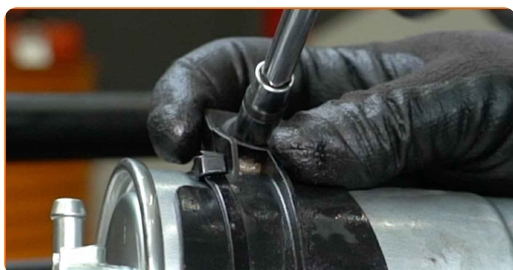

**12** Remove the bracket.

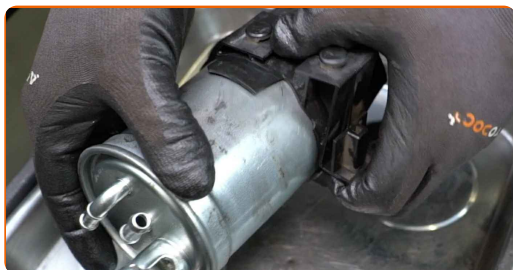


**13** Install the bracket onto the new filter.




**14** Screw in the bracket fastener. Use a drive socket #8. Use a ratchet wrench.



**15** Clean the fuel filter pipe. Use all-purpose cleaning spray.

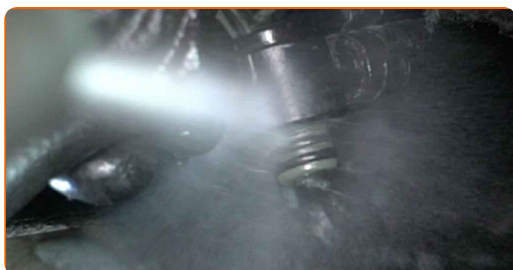

**16** Install a new fuel filter.

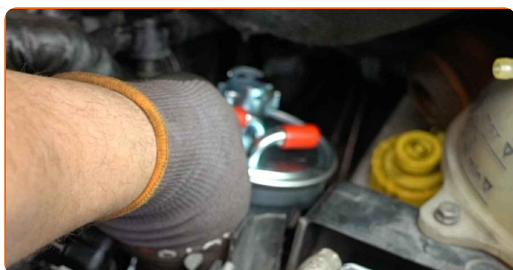


Replacement: fuel filter – VW Sharan 1. Professionals recommend:

- During installation, take care to prevent dust and dirt from getting into the fuel filter housing.
- Attention! Use quality filters – VW Sharan 1.


17

Connect the pipe to the fuel filter.

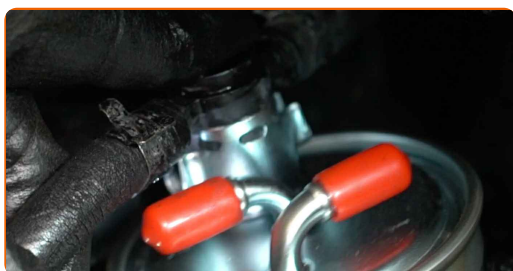


18

Secure the fuel filter pipe with the retaining clip.

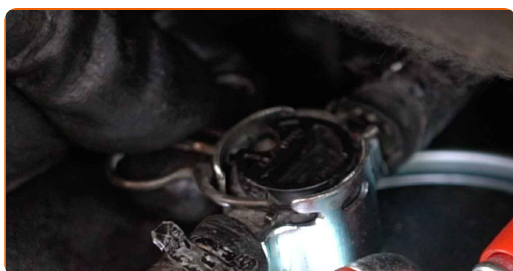

19

Secure the filter on its mounting seat.

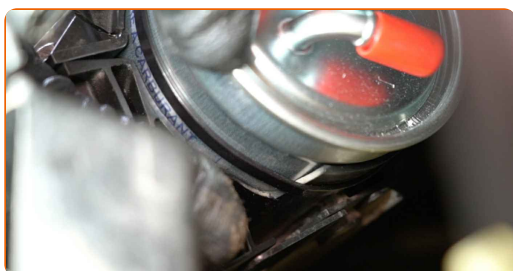


20


Connect the pipe to the fuel filter.




**21** Attach the fuel pipe clamp. Use clic-R collar pliers.

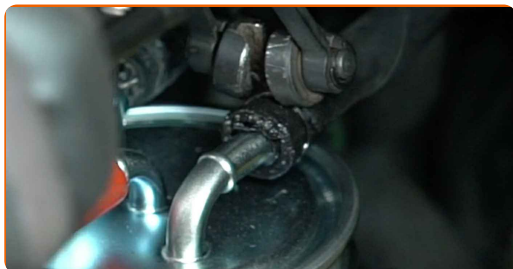


**22** Pump the fuel out of the fuel filter housing. Use a hand-operated fluid syringe.

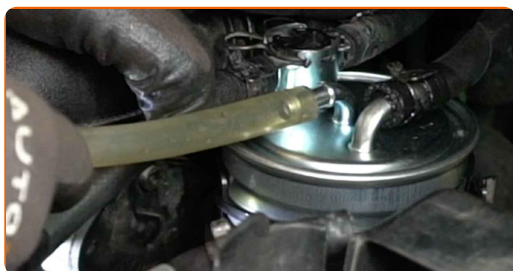


**23** Connect the pipe to the fuel filter.

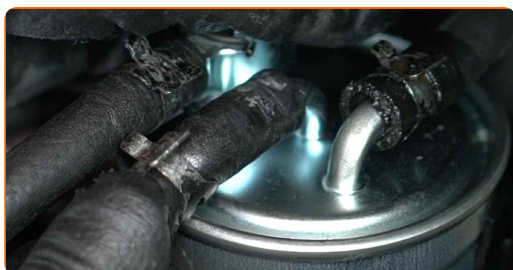


**24** Attach the fuel pipe clamp. Use clic-R collar pliers.

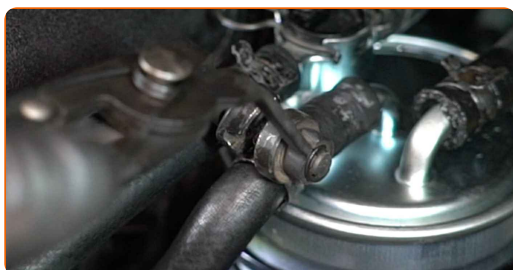

**25** Clean the fuel filter. Use all-purpose cleaning spray.

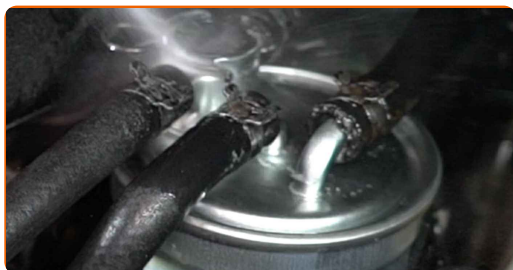


**26** Run the engine for a few minutes. This is necessary in order to make sure that the component operates properly.

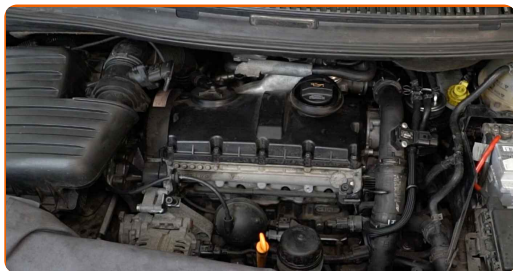


**27** Shut off the engine.

**28** Remove the fender protection cover.

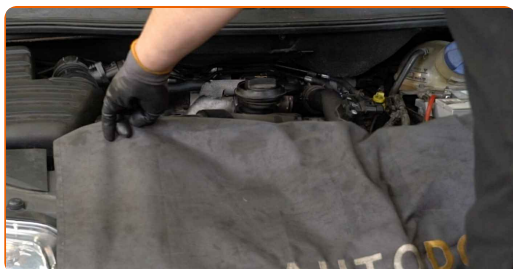

**29** Close the hood.

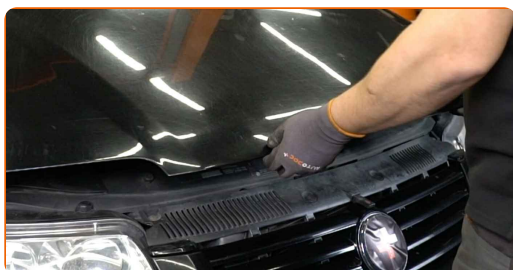

Replacement: fuel filter – VW Sharan 1. AUTODOC recommends:

- To protect the environment from pollution, be sure to dispose of the used filters at special collection points.

**WELL DONE!** 

**VIEW MORE TUTORIALS**

# AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

**AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING**



**+ AUTODOC**

GET IT ON  
**Google Play**

Download on the  
**App Store**

**Download**

**A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR**

**BUY SPARE PARTS FOR VW**

**FUEL FILTER: A WIDE SELECTION**

**CHOOSE CAR PARTS FOR VW SHARAN 1**

**FUEL FILTER FOR VW: BUY NOW**

**FUEL FILTER FOR VW SHARAN 1: THE BEST DEALS & OFFERS**

### **DISCLAIMER:**

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2023 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC SE.