



How to change front
brake hose on **VW**
Transporter T4 –
replacement guide

VIDEO TUTORIAL



Important!

This replacement procedure can be used for:

VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.4 D Syncro, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 Syncro, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 1.8, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 1.9 D, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 1.9 TD, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.4 D, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.0, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 TDI, VW Transporter T4 Minibus (70B, 70C, 7DB, 7DK, 70J, 70K, 7DC, 7DJ) 2.5 TDI Syncro, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 2.0, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 2.5, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 1.9 D, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 1.9 TD, VW Transporter T4 Van (70A, 70H, 7DA, 7DH) 2.4 D, (+ 16)

The steps may slightly vary depending on the car design.

REPLACEMENT: BRAKE HOSE – VW TRANSPORTER T4.
LIST OF THE TOOLS YOU'LL NEED:



- Wire brush
- Brake cleaner
- Copper grease
- Combination spanner #10
- Combination spanner #11
- Drive socket # 11
- Wheel impact socket #17
- Torque wrench
- Brake bleeder kit
- Fluid container
- Pliers
- Vice
- Wheel chock

BUY TOOLS

Replacement: brake hose – VW Transporter T4. AUTODOC recommends:

- The replacement procedure is identical for the right and left brake hoses on the same axle.
- All work should be done with the engine stopped.

REPLACEMENT: BRAKE HOSE – VW TRANSPORTER T4. TAKE THE FOLLOWING STEPS:

1 Open the bonnet. Unscrew the brake fluid reservoir cap.



2 Secure the wheels with chocks.



3 Loosen the wheel mounting bolts. Use wheel impact socket #17.



4

Raise the front of the car and secure on supports.



5

Unscrew the wheel bolts.



AUTODOC recommends:

- Important! Hold the wheel while unscrewing the fastening bolts. VW Transporter T4

6

Remove the wheel.



7

Put a container for gathering brake fluid beneath.



- 8 Clean the area where the brake hose is connected to the brake caliper and to the brake circuit pipe. Use a wire brush. Use a brake cleaner.




Replacement: brake hose – VW Transporter T4. Professionals recommend:

- After applying the spray, wait a few minutes.


- 9 Unscrew the brake hose from the brake caliper. Use a combination spanner #10.




- 10 Unscrew the mounting bracket that connects the brake hose to the brake caliper. Use a combination spanner #10.

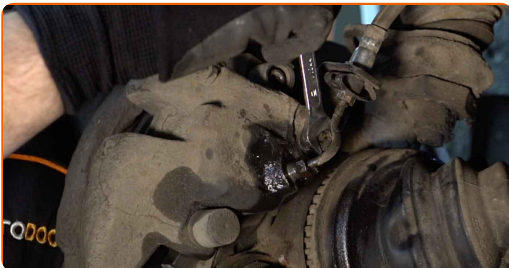

11 Unscrew the fastener connecting the brake hose to the brake circuit pipe. Use a combination spanner #10.

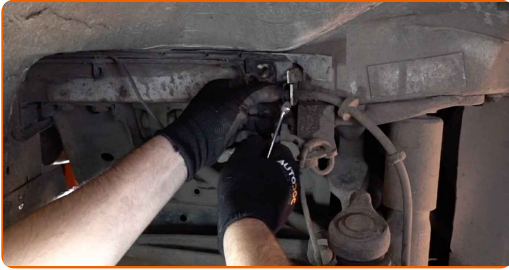

12 Remove the brake hose assembled with the mounting bracket.

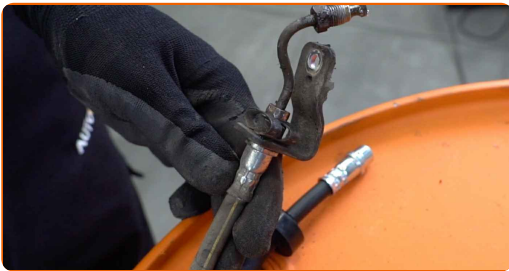


13 Grip the brake hose mounting bracket in the vice.



14 Unscrew the brake pipe from the brake hose. Use pliers. Disconnect the brake hose.



15 Remove the brake pipe from the mounting bracket.

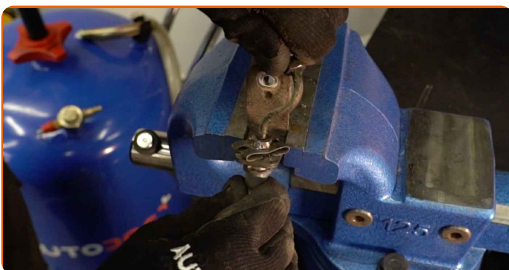


16 Loosen the vice and remove the brake hose mounting bracket.

17 Install and tighten the mounting bracket connecting the brake hose to the brake caliper.




18 Use a combination spanner #10.

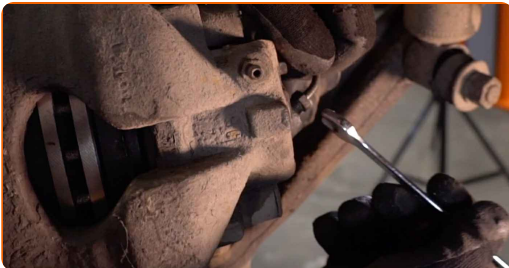

19 Install the brake pipe to the mounting bracket. Attach the new brake hose.

20 Screw the brake pipe to the brake hose. Use a combination spanner #10.

21 Tighten the fastener connecting the brake pipe to the brake caliper. Use a drive socket #11. Use a torque wrench. Tighten it to 16 Nm torque.

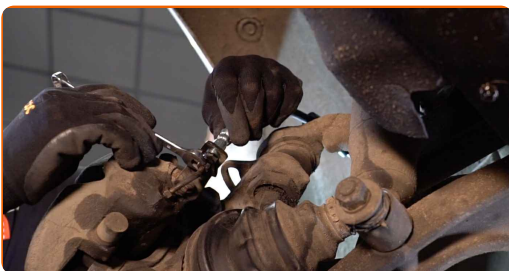

- 22 Tighten the fastener connecting the brake hose to the brake circuit pipe. Use a combination spanner #11. Use a torque wrench. Tighten it to 16 Nm torque.




- 23 Clean the brake hose mounting seat on the brake circuit pipe. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake hose – VW Transporter T4. After applying the spray, wait a few minutes.

- 24 Undo the brake bleeder screw. Use a combination spanner #11.

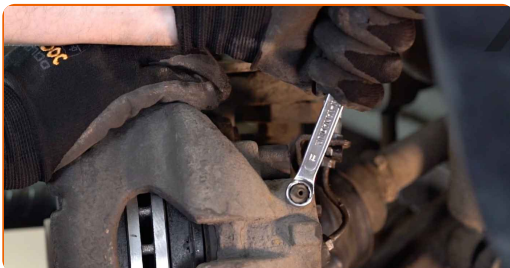

25 Connect the brake bleeder kit to the brake bleeder screw.




26 Press the brake pedal several times to remove any air from the system.




27 Tighten the brake bleeder screw. Use a combination spanner #11.



28 Disconnect the brake bleeder kit.

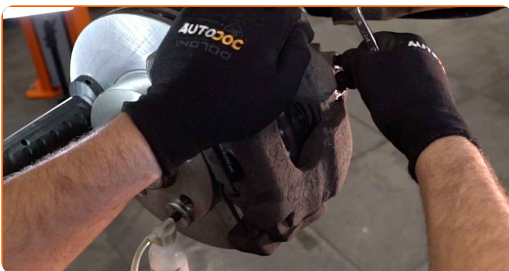

29 Clean dirt from the brake hose bolt. Use a brake cleaner.

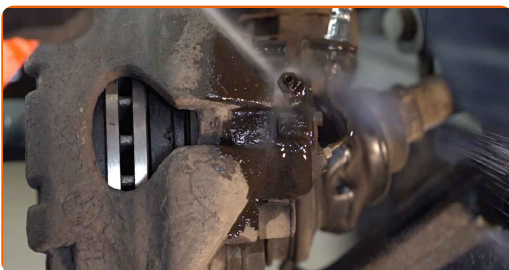

Replacement: brake hose – VW Transporter T4. Tip from AUTODOC experts:

- After applying the spray, wait a few minutes.

- 30** Clean the brake disk surface. Use a wire brush. Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



- 31** Install the wheel.



AUTODOC recommends:

- Warning! To avoid injury, hold the wheel while screwing in the fastening bolts on the car. VW Transporter T4

- 32** Screw in the wheel bolts. Use wheel impact socket #17.



- 33** Lower the car and working in a cross order, tighten the wheel bolts. Use a torque wrench. Tighten it to 170 Nm torque.



- 34** Remove the jacks and chocks.



- 35** Check the brake fluid level in the expansion tank and refill if necessary.

- 36** Tighten the brake fluid reservoir cap. Close the hood.



WELL DONE! 

VIEW MORE TUTORIALS

AUTODOC – TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

AUTODOC

GET IT ON
Google Play

Download on the
App Store

Download

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR VW

BRAKE HOSE: A WIDE SELECTION

CHOOSE CAR PARTS FOR VW TRANSPORTER T4

BRAKE HOSE FOR VW: BUY NOW

**BRAKE HOSE FOR VW TRANSPORTER T4: THE BEST DEALS
& OFFERS**

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.

© Copyright 2022 – All the contents of this website, in particular texts, photographs and graphics, are protected by copyright. All rights, including reproduction, publication, editing and translation rights, are reserved by AUTODOC GmbH.